




TECHNICAL CATALOGUE



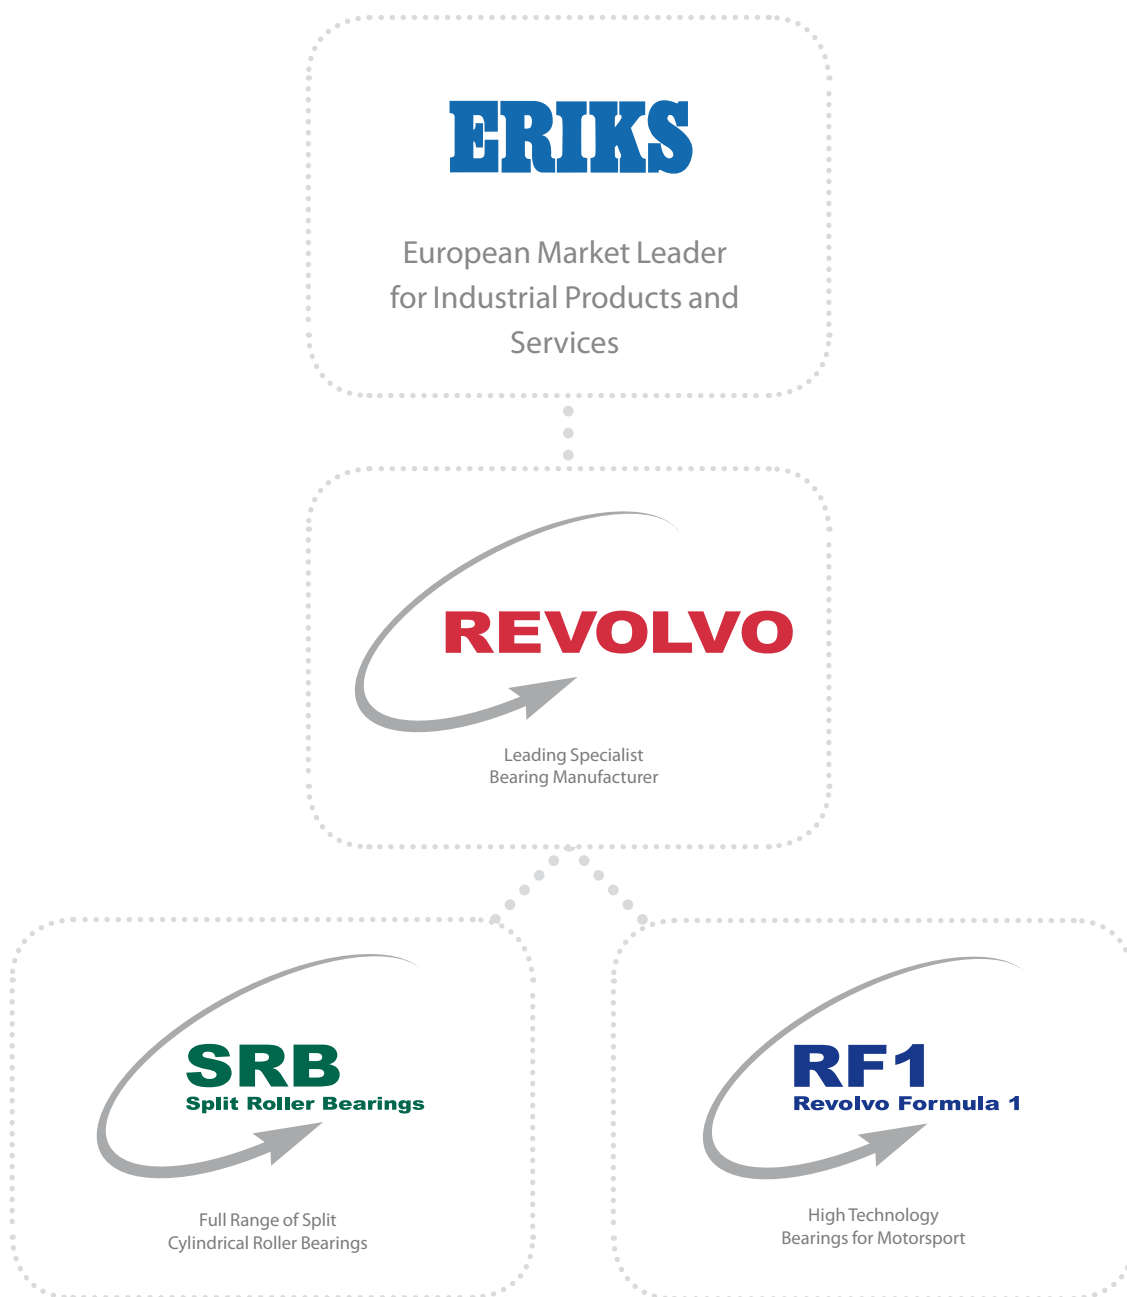

© 2009 Revolvo Ltd.
All trademarks acknowledged.
All rights reserved.

The contents of this catalogue are the copyright of Revolvo Ltd and may not be reproduced or transmitted in any form or by any means, electronic or mechanical, including by any information storage and retrieval system without permission in writing from Revolvo Ltd.

Revolvo's policy of continued product development means we reserve the right to modify any product or specification without prior notice.

Every effort has been made to ensure that the information contained within this catalogue is correct. However, no liability can be accepted for any loss or damage whether direct, indirect or consequential arising from using information contained in this publication.

Revolvo Profile

Introduction *Taking the initiative*

Page 3

Specialised Bearings

Page 5



03

Split Roller Bearings

The Advantages

Page 7

Features & Benefits

Page 9

Components Diagram

Page 10



07

SRB Applications

Applications

Page 11

Case Studies

Page 12



11

Product Range

Reference Guide

Page 17

Bearing Types

Page 19

Support Types

Page 20

SRB Range - Range Comparison

Page 21

Light Series

Page 22

Medium Series

Page 34

Heavy Series

Page 46

Sealing

Page 52

SN/SD Bearings

Page 56

SAFR Bearings

Page 61



17

Technical

Bearing Selection

Page 63

Axial Considerations

Page 66

Bearing Ratings

Page 67

Bearing Clearance and Temperature Considerations

Page 68

Support Loads

Page 69

Bearing Frequencies

Page 70

Shaft Considerations

Page 72

Bearing Lubrication

Page 73

SRB Installation Guide

Page 75

Light Series Screw Sizes, Key Sizes, Torque Values

Page 79

Medium Series Screw Sizes, Key Sizes, Torque Values

Page 80

Heavy Series Screw Sizes, Key Sizes, Torque Values

Page 81

Shipping Weights

Page 82



63

Revolvo Solid Bearings

Capabilities

Page 83

Literature Offerings

Page 84



83

Taking the initiative

In today's demanding industrial environment, specialist technology is, more than ever, key to improved efficiency, productivity and ultimately profitability. SRB, is increasingly seen as a brand which routinely challenges technological boundaries.

Rapid response and flexibility are provided from a production facility manufacturing not only split roller bearing assemblies but also cutting edge products for aerospace and motor sport. The unique relationship between manufacturer and distributors combined with innovative cellular manufacturing and modular stocking offer unparalleled availability.

From concept to design, design to production, and then throughout the life cycle of the unit no other split bearing manufacturer works so hard to exceed your expectations.

Performance

SRB products have been designed and developed to maximise service life and minimise maintenance effort.

SRB bearings have machined brass cages with unique single piece clips as standard, rolling elements are profiled to minimise damaging edge stresses and provide optimum rolling contact.

All supports and housings incorporate pry slots and doweled machined joints for easy separation. Supports are manufactured from high strength cast iron and feature double webs and thick sections; product life is thus enhanced due to high rigidity and inherent strength.

Innovation in application

The benefits of totally split-to-the-shaft bearing assemblies are long established, subsequent savings in production and maintenance are well documented.

However, split roller bearings are today being selected for an ever-wider range of applications. Additional features and benefits available from the SRB range allow our products to run faster, take higher loads, at higher temperatures and in increasingly hostile environments.

Optimisation of plant efficiency is the goal of today's maintenance engineer. The application of reliable products offering real savings, derived from increased mean time between failures, which widens periods between planned shutdowns, and the elimination of unplanned downtime are becoming a reality when utilising advanced components accommodating split options.



Introduction



Innovation in Service

Producing products that push the boundaries of performance is only the beginning. SRB recognises that users and specifiers of split roller bearings demand logistical, technical and after sales support.

Experienced application engineering support is available to assist customers with concepts through consultation, commissioning, training, supply and post installation support.

Cellular manufacture, modular stocking, logistical expertise and unique distributor/manufacturer interfaces provide excellent availability of product in the right place at the right time.

A team of design engineers provides bespoke solutions on state of the art CAD systems. Close liaison with our customers allows SRB to continuously refine and improve products, production processes and service procedures. This enables ongoing development allowing SRB to provide a benchmark in technical support.



Specialised Bearings

Over the past 10 years, SRB have built a reputation throughout the world for the manufacture of highly specialised bearing units. From thin section, high speed bearings for wire stranding machines to robust, dependable water cooled units for continuous casting, SRB have the capability to provide products at least equal to, and usually far in excess of, the performance of bearings of other manufacture.

The cornerstone of this growing reputation is SRB's willingness to work closely with equipment manufacturers and end users to solve specific application problems. This has led to the development of a number of innovative designs, some of which have now been incorporated into the SRB product range.

With a grinding capacity of 1.5m and turning capacity greater than 1.8m, SRB have ability to produce bearings substantially larger than those listed in the main body of this or other catalogues. With a number of bearings of bore sizes in excess of 700mm in service, SRB have repeatedly demonstrated their ability in this sector.


Continuous casting plant found throughout the steel industry provides one of the most challenging operating environments for any bearing system. SRB, by working in conjunction with a number of OEMs and end-users have established a growing reputation in this field. SRB have introduced a number of design innovations whilst maintaining the envelope, layout and fitting conditions stipulated by current applications.

As a result, a bearing operation life in excess of one million tons of cast steel is not uncommon.





Manufacture of SRB's highly specialised bearing units.

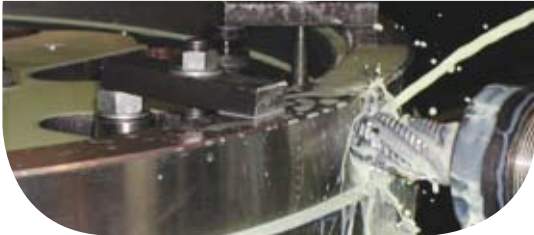

The Advantages of Split Roller Bearings



Split Roller Bearings are essential in applications involving limited access and are highly cost effective where down time due to change-outs results in significant production losses.

Split Roller Bearings are completely split to the shaft. Installation and inspection times are therefore dramatically reduced. Additionally the time saved and costs eliminated by not having to remove ancillary equipment results in even higher potential savings.

Inspection Simplified

No matter what the size or type of split roller bearing, inspection is straight forward. Simply remove the support cap and the top half of the housing and all bearing parts become visible and accessible.

As a result considerable numbers of man-hours can be saved during planned maintenance, further adding to the potential cost savings available.

Short Term Payback, Long Term Benefits.


Though it would be easy to cite examples where the use of split bearings results in spectacular savings, the truth of the matter is that savings of a significant amount can be made in almost any application. Even modest savings can be enough to justify the use of split bearings. Depending on the application, down times for replacement of split bearings can be a small fraction of those required for solid bearings. This yields savings in both maintenance man-hours and lost production.

When such cost savings are taken into account at the bearing selection stage, the case for SRB split roller bearings becomes irrefutable.

Further Savings


Even in situations where SRB bearings are used to replace other split bearing brands the potential for savings exists. Through the use of machined brass cages as standard, inclusion of profiled rolling elements and the incorporation of high-grade materials for housings and supports, SRB bearings have the capability to extend service life leading to a reduction in bearing consumption.



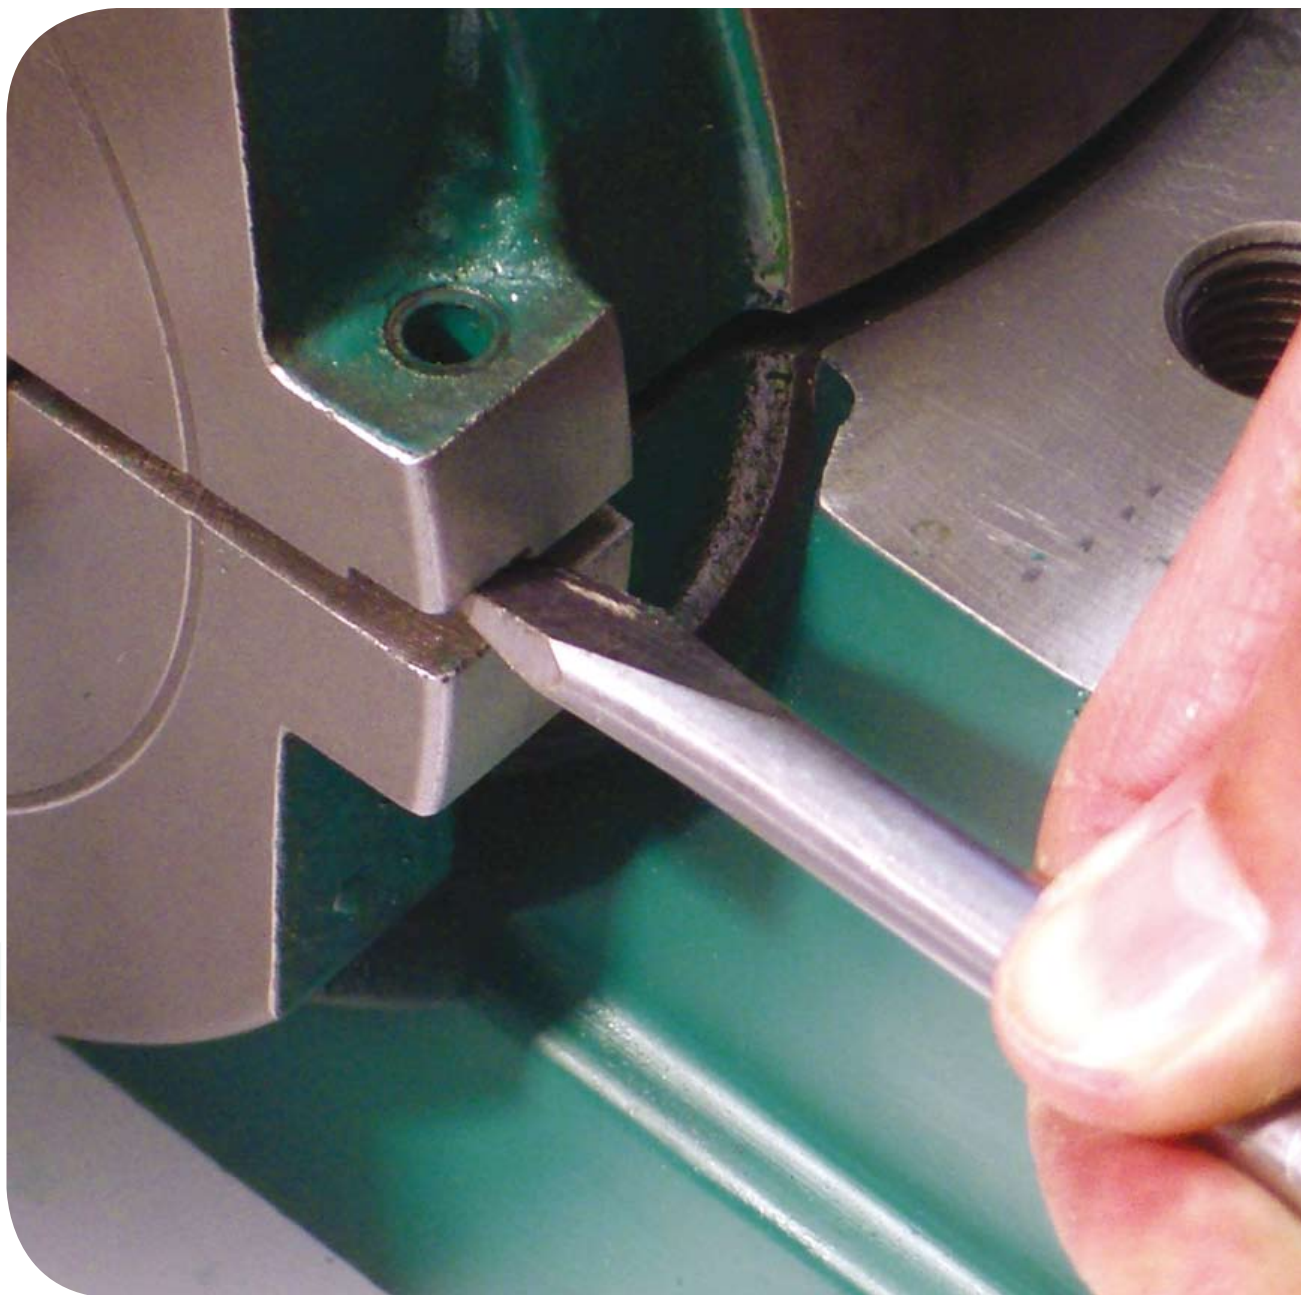


Features & Benefits

Features	Benefits
All components are totally split to the shaft	Quick and easy installation. Substantial reduction in downtime compared to replacement of solid bearings
Support caps and housing halves are quickly removed	Easy visual inspection to assess the condition of the bearing (during planned maintenance)
Replacement bearing interchangeability with existing housing	Simple and economic bearing replacement
Unit accommodates initial misalignment	Simplifies installation of associated equipment
Machined brass cage as standard	Enhanced ability to accommodate higher speeds and temperatures
Innovative cage clip design	Clips retained on one cage half during assembly and disassembly
250 Grade cast iron to BS EN1561 : 1997	Strength and durability
Profiled rolling elements	Minimises damaging edge stresses

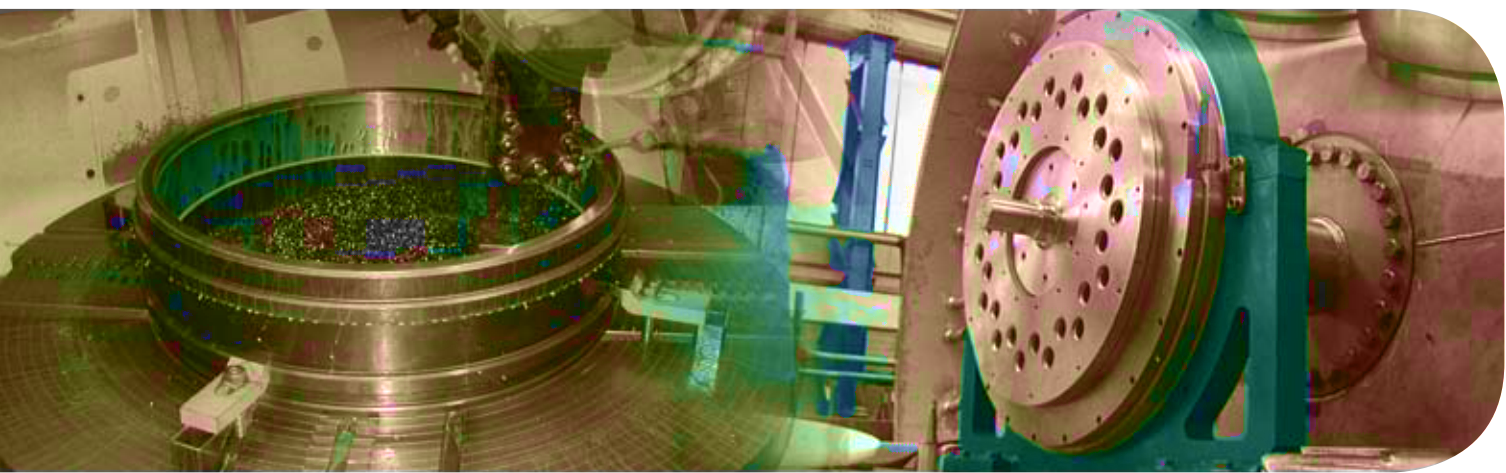

Standard Unit Anatomy

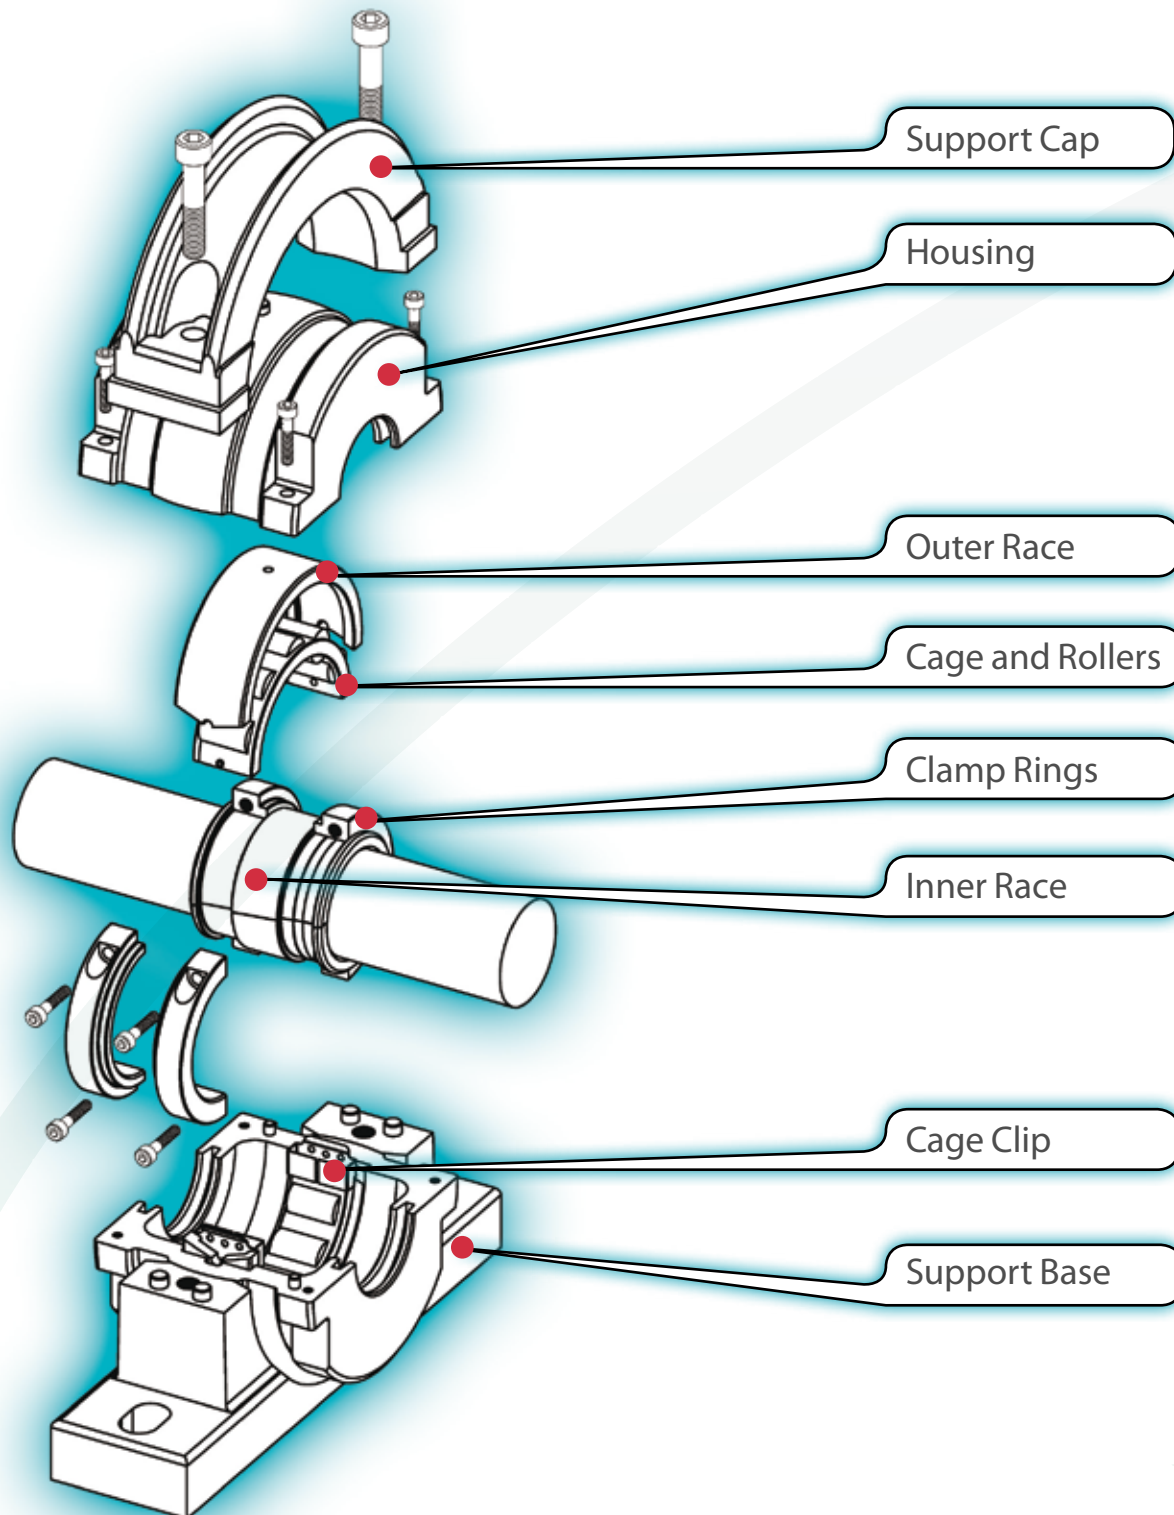

Applications & Case Studies

The key benefit of split roller bearings is the savings that can be made in relation to reducing downtime. This is an advantage which can be utilised in any industry. Along with our distributors throughout the world, SRB have a proactive approach to market evolution and are constantly identifying and developing new applications for split roller bearings. SRB continue to service and supply a wide range of Industries and associated applications including:

- Air Movement
- Cement
- Conveyor Systems
- Metal Processing
- Mining
- Power Generation
- Quarrying
- Sugar
- Timber
- Manufacturing



Case Study1

Pelletiser Drive Problem

Solved by SRB



SRB were invited to supply product on a problem application at a major UK steel producer. A drive to a pelletiser supported on split roller bearings had become a major headache.

Regular bearing failures were being experienced; sometimes bearings lasted no longer than 3 or 4 months.

The latest design of a competitor's split bearing featuring a pressed steel cage was used in an attempt to extend bearing life, however, it quickly became clear that this product was unable to solve the problem.

It was agreed that a brass caged SRB bearing should be fitted in a final attempt to solve the problem.

An engineer from SRB supervised the fitting of the bearing and, following a check of all mating components, the SRB bearing was mounted into the competitor's cast iron support.

The bearings and housing have now operated for over two years without problems. The success of the SRB product in this application lead to many other opportunities with this customer.



Case Study 2

Zambesi Rapid Water Ride



SRB have supplied ground breaking split bearing assemblies to resolve the support problems for the twin ascender screw providing water to the massive Zambesi Rapid Water ride in the Gold Reef City theme park, RSA.

The lower bearings, traditionally of an inefficient plain bearing design, are completely submerged in water. The water also contains sand and silt in suspension as a result of the constant churning. This forms an abrasive solution.

In contrast, the upper bearing, though in dry conditions, must accommodate some 16 tonnes of thrust load.

The screw conveyors are 11m long and 2.7m diameter angled 30 degrees and rotating at 27.5 rpm. Together, the twin units are capable of supplying 7 cubic meters of water per second

(25,200 tonnes per hour).

The lower bearing, a Light Series 200mm diameter, features sealing adequate to exclude water and other contaminants from the bearing enclosure. This is achieved via an arrangement of two lip seals with garter springs with a central grease feed. The sealing efficiency and grease purge provides long term reliable operation.

The upper bearing, a Medium Series 250mm diameter, was designed to accommodate the large axial load. The load is carried between the inner race

shoulder on one side and the outer race lip on the other. Both shoulders and lips are specially designed to facilitate the generation of an oil film between the sliding surfaces of roller ends and lips, thereby reducing wear and limiting temperature generation.

The bearings operate in an ambient temperature of up to 40°C and have now run problem free for over six years. This illustrates how SRB can design and manufacture units to accept conditions outside of the normal perceived split bearing capabilities.



Case Study 3

High Capacity Unit from SRB Reduces Downtime

A continuing problem with bearing failure on the raw mill drive pinions at a major Cement manufacturer has been solved by employing SRB's high capacity Heavy Series units. The 13 inch bore bearings originally used were prone to premature failure and a replacement was being fitted every twelve months. The job was taking over two days to complete and causing unnecessary cost and disruption meaning partial plant shutdowns in each instance.



Working closely with the end users engineering staff, SRB were able to provide a solution in the shape of our Heavy Series Units using high quality materials and drawing on years of field experience to improve on existing designs. The SRB units are produced with a machined brass cage as standard rather than the aluminium type found in older designs. A strong, bolt located "H" section clip ensures secure and accurate alignment of the cage halves further improving the performance characteristics.

To date the bearing has been in operation for some three years and is performing as well as when first fitted. The bearing has now been joined on site by numerous others as a result of maintenance staff actively seeking for applications which would benefit by specifying SRB units. As a result of continuing successes in both standard and specialised applications, SRB bearings are now in use at all sites throughout the UK.



Case Study 4

Replacement SRB Split Bearing keeps the Roof on at Ibstock Brick

SRB's recently launched range of interchangeable Split Plummer Block mounted bearings has emphatically proved the value of the new designs by ensuring that one of the two central brick production lines at Ibstock Brick was kept in operation cost effectively. Using the split design as a direct replacement for a failed conventional interference fit SN housed bearing, SRB demonstrated a huge saving in terms of time and cost of replacement.

Engineers took just three hours to complete the replacement whereas the alternative of replacing the original like-for-like would have taken 3–4 working days and required a crane to remove part of the factory roof. In all, the cost would have been approaching £10,000 and required far more logistical planning. As it was, the repair work took just three hours and cost a little over £2,000 fitted, including a James Walker split seal to help prevent liquid contaminants entering the bearing enclosure and causing future failures.

The failed bearing supported one of the main power transmission shafts in one of the two central brick production lines at Ibstock. Until recently, there were only two choices open to maintenance engineers faced with this situation; the first would be to fit another standard bearing and the second to adapt the mounting and shaft positions to accommodate a traditional split roller bearing.

The first option would have required the complete dismantling of a large part of the plant with all the incumbent costs. To fit the second option – a traditional split roller bearing, would also have required a significant amount of work to alter or replace the main support beam in order to accommodate the larger housing dimensions normally associated with a split bearing design. The new 'compact' SRB split plummer block bearing however, is the first split cylindrical roller bearing assembly to be dimensionally interchangeable with standard SN and SD series plummer blocks and therefore could be installed without the major drawbacks associated with the other two options.






Simple inspection is another key advantage of the SRB design. With a solid bearing, specialised vibration analysis may be required to detect bearing wear. Many are replaced routinely rather than risk downtime due to failure; the top sections of an SRB unit, however, can be simply unbolted and lifted off to provide a rapid visual inspection. Again, this feature can save time and reduce the risk of unplanned or pressurised downtime.

SRB bearings can also compensate for a higher degree of shaft misalignment. Self-aligning ball and spherical roller bearings allow misalignment of the shaft relative to the seal, which results in inefficient sealing performance. The SRB bearing is enclosed by a housing that can swivel within the cast iron support allowing the bearing and seals to remain concentric to the shaft. This feature prevents the characteristic shaft wear and seal damage caused by standard bearings compensating for misalignment within the bearing.

Quick Reference Guide

In order to provide our customers with clear and concise labelling, SRB have endeavoured to keep things simple when creating references. The following should cover the majority of ordering situations, however, as always, your local SRB distributor or SRB Technical Services will be pleased to provide further assistance if required.

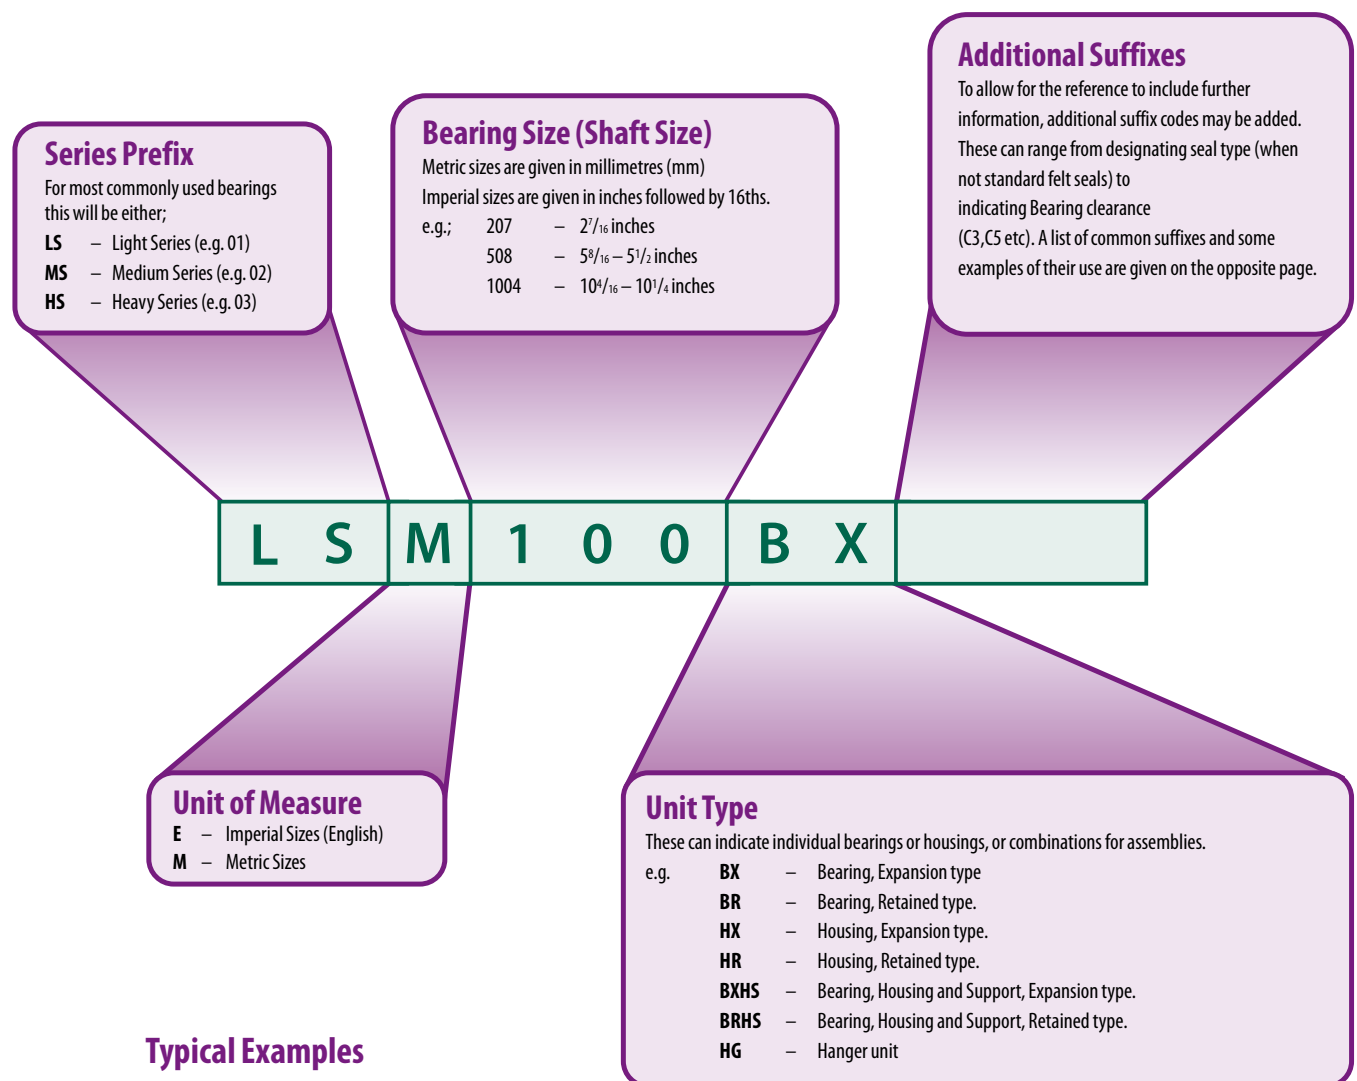

Typical Examples

LSM50BR

Light Series 50mm Retained Bearing

LSE108BXH

Light Series 1¹/₂ inch Expansion Bearing with Housing

MSM100HR

Medium Series 100mm Retained Housing

MSE200BXHS

Medium Series 2 inch Expansion Bearing with Housing and Support

LSM75BXHG

Light Series 75mm Expansion Bearing in Hanger Unit

Series Prefixes

LSM	Light Series Metric
LSE	Light Series Imperial
MSM	Medium Series Metric
MSE	Medium Series Imperial
HSM	Heavy Series Metric
HSE	Heavy Series Imperial
XSM	Tubular Strander Series Metric
XSE	Tubular Strander Series Imperial
CCM	Water Cooled Series Metric
CCE	Water Cooled Series Imperial

Examples of Additional Suffixes

AF	Axial Float
AP	Air Purge
ATL	Aluminium Triple Labyrinth
BEM	Base Ends Machined
BL	Brass Label
BOEC	Bolt On End Cover
C2,C3,C5	Bearing Clearance (ISO)
CH	Inner Race bore Chamfer with size eg CH6mm, CH11mm
EC	End Cover
ECTL	End Cover for Triple Labyrinth Bore
ES	Electrical Specification
FC	Full Compliment of rollers
GE	Grease Escape
HTPS	High Temperature Packing Seal
LSR	Laminar Seal Rings
NTL	Nitrile Triple Labyrinth
OB	Overbored with size eg OB160mm
OTL	Overbored Triple Labyrinth Seal
RSS	Nitrile Single Lip Seal
S1,S2,S3	Designation for Tempered Bearings (ISO)
SFO	Swivel fit, Zero clearance.
SLO	Single Lipped Outer
SLUB	Spherical Lubrication
TE	Temperature Probe hole
WSRP	Single Lip Seal with Garter Spring and Retaining Plate
XAR	Extended Antirotation Pin

Type References

BX	Expansion Bearing
BR	Retained Bearing
HX	Expansion Housing
HR	Retained Housing
HG	Hanger Housing
BXH	Expansion Bearing with Housing
BRH	Retained Bearing with Housing
BXHG	Expansion Bearing with Hanger
BXHS	Expansion Bearing with Housing and Support
BRHS	Retained Bearing with Housing and Support
BXHF	Expansion Bearing with Housing and Flange
BRHF	Retained Bearing with Housing and Flange
BXHTT	Expansion Bearing with Housing and Tension Type Take Up
BRHTT	Retained Bearing with Housing and Tension Take Up
BXHTP	Expansion Bearing with Housing and Pull Type Take Up
BRHTP	Retained Bearing with Housing and Pull Type Take Up

Light Series

mm	inch	Support	Flange	Take Ups
35 to 40	1 ³ / ₁₆ to 1 ¹ / ₂	S01	F01	TT01 TP01
45 to 50	1 ¹ / ₁₆ to 2	S02	F02	TT02 TP02
60 to 65	2 ³ / ₁₆ to 2 ¹ / ₂	S03	F03	TT03 TP03
70 to 75	2 ¹ / ₁₆ to 3	S04	F04	TT04 TP04
80 to 90	3 ³ / ₁₆ to 3 ¹ / ₂	S05	F05	TT05 TP05
100 to 105	3 ¹ / ₁₆ to 4	S06	F06	TT06 TP06
110 to 115	4 ³ / ₁₆ to 4 ¹ / ₂	S07	F07	TT07 TP07
120 to 130	4 ¹ / ₁₆ to 5	S08	F08	TT08 TP08
135 to 140	5 ³ / ₁₆ to 5 ¹ / ₂	S09	F09	TT09 TP09
150 to 155	5 ¹ / ₁₆ to 6	S10	F10	TT10 TP10
160	6 ⁷ / ₁₆ to 6 ¹ / ₂	S11	F11	
170 to 180	6 ¹ / ₁₆ to 7	S12	F12	
190 to 200	7 ¹ / ₄ to 8	S13	F13	
220 to 230	8 ¹ / ₂ to 9	S14	F14	
240 to 250	9 ¹ / ₂ to 10	S15	F15	
260 to 280	10 ¹ / ₂ to 11	S16	F16	
300	11 ¹ / ₂ to 12	S17		
320 to 330	12 ¹ / ₂ to 13	S18		
340 to 350	14	S19		
360 to 380	15	S20		
400	16	S21		
420	17	S22		
440 to 460	18	S23		
480	19	S24		
500	20	S25		
530	21	S26		
560	22	S27		
580	23	S28		
600	24	S29		

Medium Series

mm	inch	Support	Flange	Take Ups
45 to 50	1 ¹ / ₁₆ to 2	S03	F03	TT03 TP03
60 to 65	2 ³ / ₁₆ to 2 ¹ / ₂	S04	F04	TT04 TP04
70 to 75	2 ¹ / ₁₆ to 3	S05	F05	TT05 TP05
80 to 90	3 ³ / ₁₆ to 3 ¹ / ₂	S06	F06	TT06 TP06
100 to 105	3 ¹ / ₁₆ to 4	S07	F07	TT07 TP07
110 to 115	4 ³ / ₁₆ to 4 ¹ / ₂	S08	F08	TT08 TP08
120 to 130	4 ¹ / ₁₆ to 5	S10	F10	TT09 TP09
135 to 140	5 ³ / ₁₆ to 5 ¹ / ₂	S30	F30	TT30 TP30
150 to 155	5 ¹ / ₁₆ to 6	S31	F31	TT31 TP31
160 to 170	6 ⁷ / ₁₆ to 6 ¹ / ₂	S32	F32	
180	6 ¹ / ₁₆ to 7	S33	F33	
190 to 200	7 ¹ / ₄ to 8	S34	F34	
220 to 230	8 ¹ / ₂ to 9	S35	F35	
240 to 260	9 ¹ / ₂ to 10	S36	F36	
280	10 ¹ / ₂ to 11	S37	F37	
300	11 ¹ / ₂ to 12	S38	F38	
320 to 330	12 ¹ / ₂ to 13	S39		
340 to 360	14	S40		
380	15	S41		
400	16	S42		
420	17	S43		
440 to 460	18	S44		
480	19	S45		
500	20	S46		
530	21	S47		
560	22	S48		
580	23	S49		
600	24	S50		


Heavy Series

mm	inch	Support	Flange
100 to 105	3 ¹ / ₁₆ to 4	S54	F54
110 to 120	4 ³ / ₁₆ to 4 ¹ / ₂	S55	F55
125 to 130	4 ¹ / ₁₆ to 5	S56	F56
135 to 140	5 ³ / ₁₆ to 5 ¹ / ₂	S57	F57
150 to 155	5 ¹ / ₁₆ to 6	S58	F58
160 to 170	6 ⁷ / ₁₆ to 6 ¹ / ₂	S59	F59
180	6 ¹ / ₁₆ to 7	S60	F60
190 to 200	7 ¹ / ₄ to 8	S61	F61
220 to 230	8 ¹ / ₂ to 9	S62	F62
240 to 260	9 ¹ / ₂ to 10	S63	F63
280	11	S83	F64
300	12	S65	F65
320 to 330	13	S66	
340 to 360	14	S86	
380 to 400	15 to 16	S68	
420 to 440	17	S89	
460	18	S90	
480	19	S94	
500	20	S94	
530	21	S94	
560	22	S94	
580	23	S95	
600	24	S95	

Bearing Types

Retained Type Bearings (BR)


This bearing has integral lips on the outer race to provide a surface for axial load. This axial load is accommodated on the inner race via the hardened clamp rings, which both align the inner race halves and provide roller guidance. In larger bearings the inner race is manufactured with integral ribs for roller guidance and axial load.

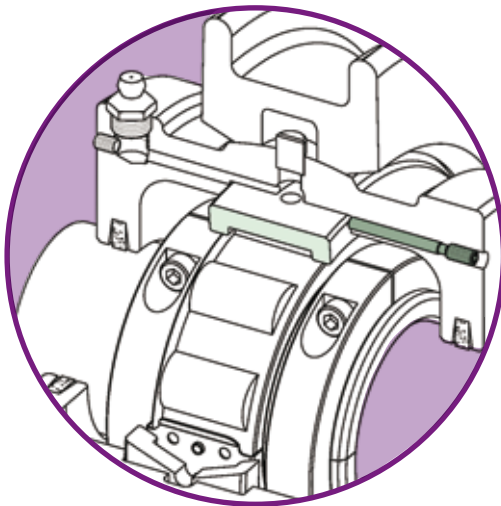

This type of bearing will locate the shaft axially as well as provide a means for taking axial load. The retained outer race must be fixed sideways against one of the housing groove shoulders using the pins and screws provided. Only one retained unit should be mounted on any particular shaft. Additional care should be taken when mounting split roller bearing unit on shafts using other, non-split types of bearings (ball, cylindrical and spherical roller etc.) to ensure there are no other locating bearings used.

Expansion Type Bearings (BX)

This bearing is designed for radial loads only. As in the retained type bearing, the rollers are guided on the inner race by the hardened shoulders of the clamping rings.

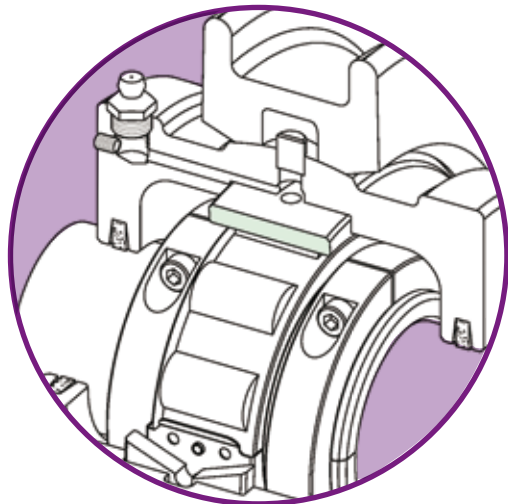


During expansion or contraction of the shaft, rollers are free to move across the plain outer race offering virtually no resistance to axial movement. Limits for the amount of axial movement are given in the Assembly and Maintenance section.

Support Types

Support Units

SRB bearings and housings may be mounted in a variety of support units according to the application and loading constraints. A number of variants are available as standard types with other unit types available on request. SRB can also offer a design and manufacturing facility to produce bespoke units to cover more specialised applications.

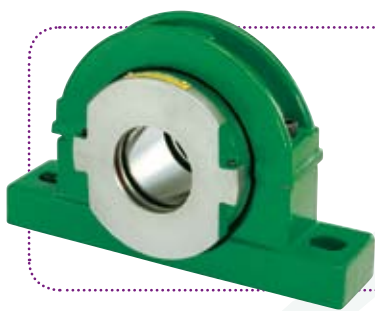

Pillow Block Type

This is by far the most popular method for mounting SRB units. These supports are manufactured from high strength, grade 250 (BS EN1561 :1997) cast iron. This, combined with the robust design, provides a stable, rigid base, allowing the split bearing fitted to give optimum performance.




Flange Units

In applications where bearings need to be mounted against horizontal or vertical faces, SRB flange units provide a simple means of achieving this goal. Again, the use of Grade 250 cast iron ensures a durable unit.



Hanger Units

A compact unit commonly used for supporting screw conveyors or similar equipment.

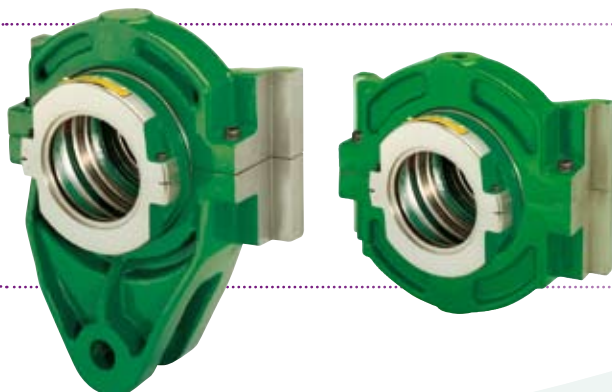

Take-up Units


These sliding units can be used to effectively tension conveyor and elevator systems. Both pull and push types are available.

Range Comparison

Bearing Series

Comparison

SRB offers a range of bearing series, providing solutions for a wide range of operating conditions. Light, Medium and Heavy series offer an increasing ability to accommodate higher loads. As the series increases the speed capability reduces.

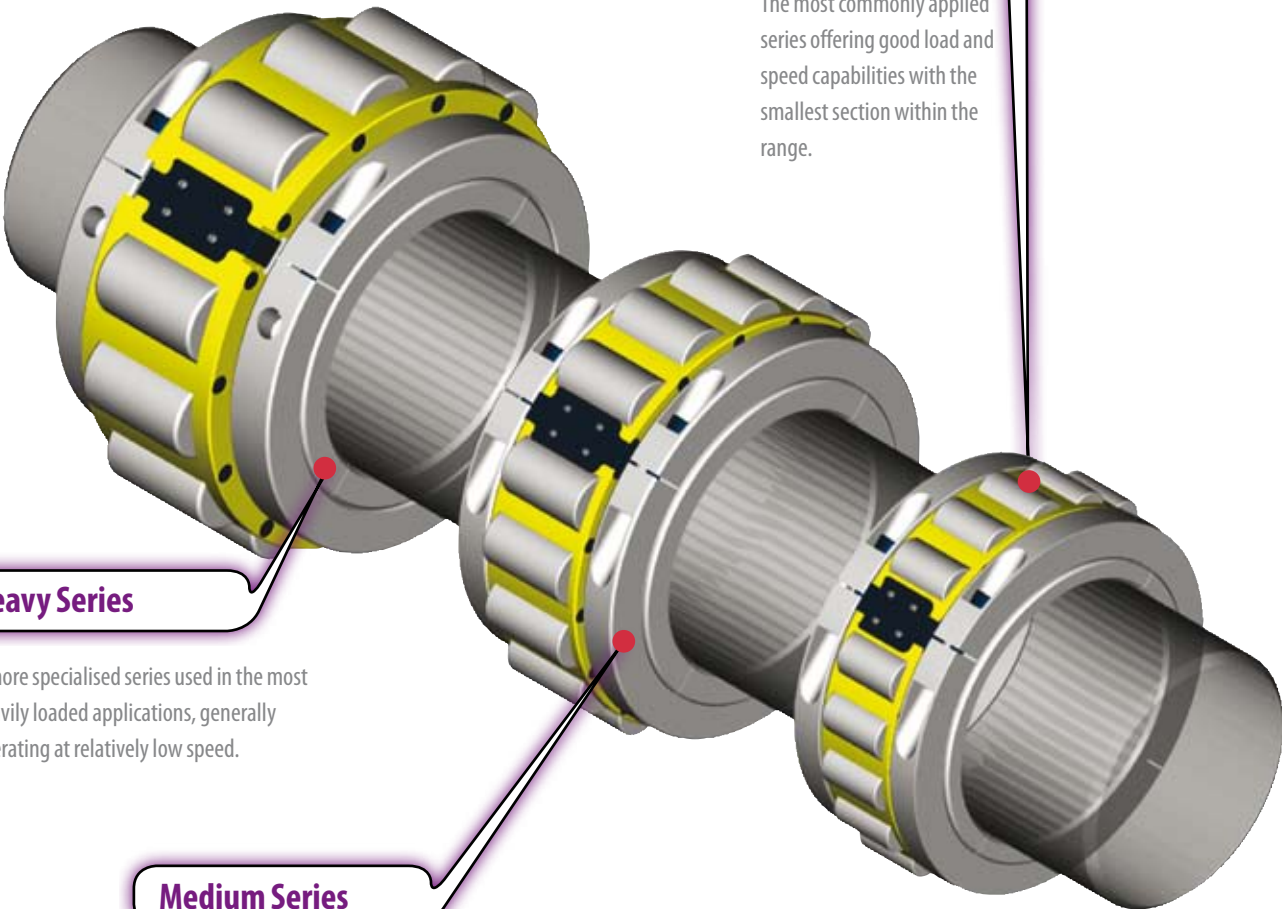

Light Series:

The most commonly applied series offering good load and speed capabilities with the smallest section within the range.

Heavy Series

A more specialised series used in the most heavily loaded applications, generally operating at relatively low speed.


Medium Series

An increased section offers additional load carrying capacity. This series is typically used in arduous, heavily loaded applications where shock load and vibration may be present.

Light Series


Light Series bearing products are by far the most commonly utilised range within the Split Bearing family. With a wide variety of mounting and sealing solutions available, Light Series bearing units can readily be matched to an ever-increasing range of applications. If a standard catalogue product does not meet your requirements, SRB Technical Services will be happy to provide help and advice on your application.

Bearings, Housings & Supports	40mm to 150mm	Page	23 – 24
	160mm to 340mm	Page	25 – 26
	360mm to 600mm	Page	27 – 28
Flange Units		Page	29 – 30
Tensioning Units		Page	31 – 32
Hanger Units		Page	33

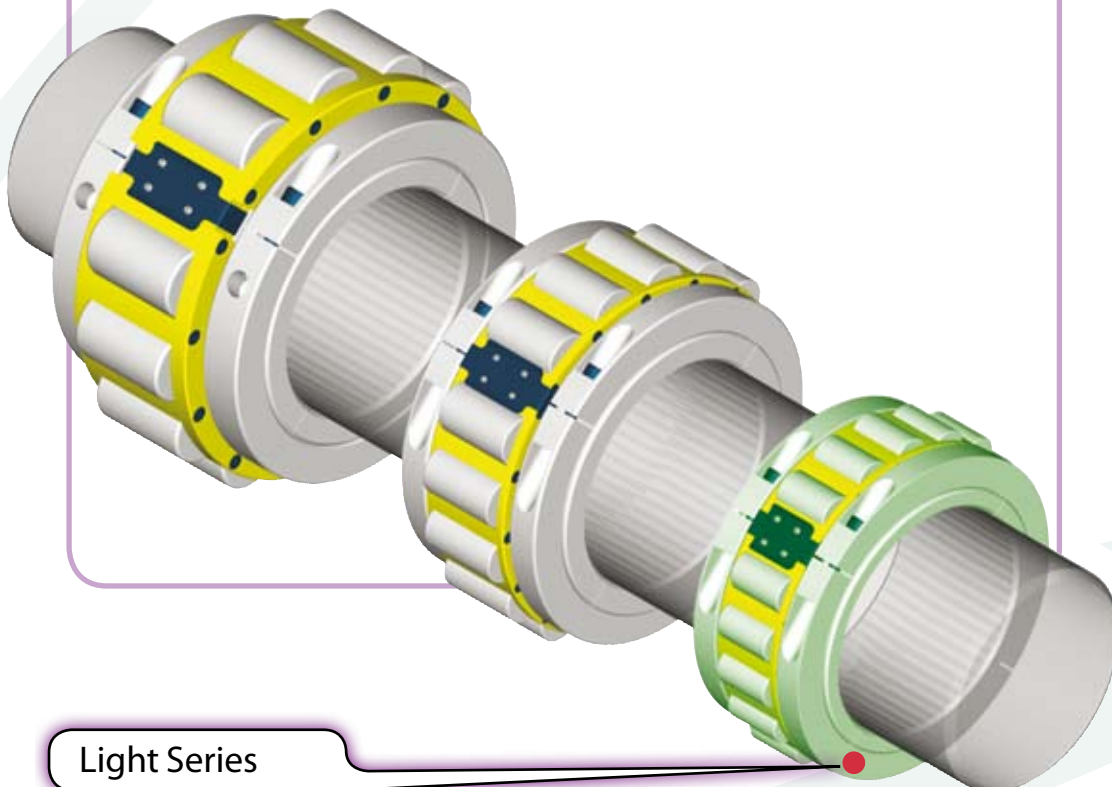

Light Series


Light Series Bearing & Housing
40mm to 150mm

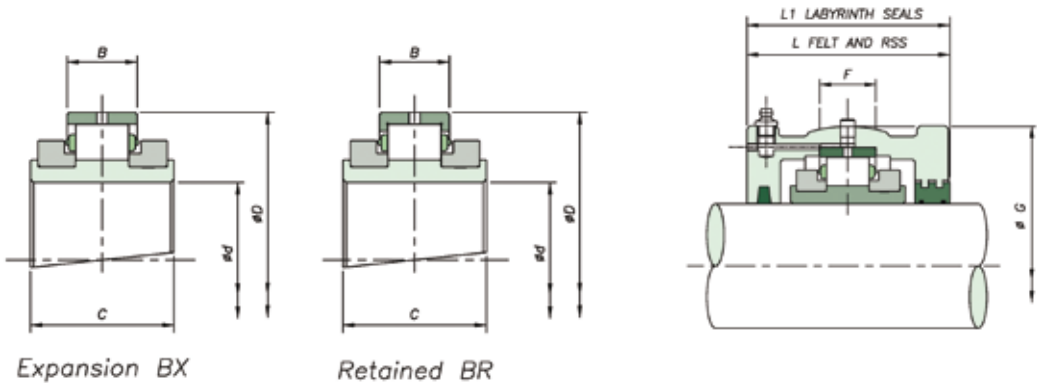

Shaft (d)		Reference		Bearings Ratings						Housing Reference										
mm	inch	Add BR for retained Add BX for expansion e.g. LSM35BR		Dynamic C _r (kN/lb)	Static C _{or} (kN/lb)	Axial C _a (kN/lb)	Max RPM	D	B	C	Add HR for retained Add HX for expansion e.g. LSM35HR		G	F	L	L ₁				
35 40	1 ³ / ₁₆ 1 ¹ / ₄ 1 ⁷ / ₁₆ 1 ¹ / ₂	LSM35 LSM40	LSE103 LSE104 LSE107 LSE108	65 14613	68 15287	3.20 719.38	5400	84.14 3.313	23.80 0.937	55.00 2.165	LSM35 LSM40	LSE103 LSE104 LSE107 LSE108	100.00 3.937	25 1.0	84 3.3	86 3.4				
	45 50	1 ¹¹ / ₁₆ 1 ³ / ₄ 1 ¹⁵ / ₁₆ 2	LSM45 LSM50	LSE111 LSE112 LSE115 LSE200	83 18659	87 19558		3.60 809.30	4630	98.42 3.875	25.40 1.000	60.00 2.362	LSM45 LSM50	LSE111 LSE112 LSE115 LSE200	117.48 4.625	25 1.0	96 3.8	98 3.9		
		55 60 65	2 ³ / ₁₆ 2 ¹ / ₄ 2 ⁷ / ₁₆ 2 ¹ / ₂	LSM55 LSM60 LSM65	LSE203 LSE204 LSE207 LSE208	103 23155		115 25853		5.40 1213.95	3940	114.30 4.500	27.00 1.063	60.00 2.362	LSM55 LSM60 LSM65	LSE203 LSE204 LSE207 LSE208	134.94 5.313	32 1.3	102 4.0	104 4.1
			70 75	2 ¹¹ / ₁₆ 2 ³ / ₄ 2 ¹⁵ / ₁₆ 3	LSM70 LSM75	LSE211 LSE212 LSE215 LSE300		138 31024		161 36194		7.60 1708.53	3310	133.35 5.250	31.80 1.252	65.00 2.559	LSM70 LSM75	LSE211 LSE212 LSE215 LSE300	157.16 6.187	38 1.5
80 85 90				3 ³ / ₁₆ 3 ³ / ₄ 3 ⁷ / ₁₆ 3 ¹ / ₂	LSM80 LSM85 LSM90	LSE303 LSE304 LSE307 LSE308	187 42039	231 51931		12.40 2787.59		2790		152.4 6.000	38.90 1.531	75.00 2.953	LSM80 LSM85 LSM90	LSE303 LSE304 LSE307 LSE308	177.80 7.000	50 2.0
	100 105			3 ¹¹ / ₁₆ 3 ³ / ₄ 3 ¹⁵ / ₁₆ 4	LSM100 LSM105	LSE311 LSE312 LSE315 LSE400	288 64745	366 82280	16.00 3596.90	2340				174.62 6.875	45.30 1.783	85.00 3.346	LSM100 LSM105	LSE311 LSE312 LSE315 LSE400	203.20 8.000	50 2.0
		110 115		4 ³ / ₁₆ 4 ¹ / ₄ 4 ⁷ / ₁₆ 4 ¹ / ₂	LSM110 LSM115	LSE403 LSE404 LSE407 LSE408	316 71040	427 95993	18.60 4181.39		1970			203.20 8.000	46.90 1.846	90.00 3.543	LSM110 LSM115	LSE403 LSE404 LSE407 LSE408	231.78 9.125	64 2.5
			120 125 130	4 ¹¹ / ₁₆ 4 ³ / ₄ 4 ¹⁵ / ₁₆ 5	LSM120 LSM125 LSM130	LSE411 LSE412 LSE415 LSE500	363 81606	496 111505	22.20 4990.69				1740	222.25 8.750	54.00 2.126	95.00 3.740	LSM120 LSM125 LSM130	LSE411 LSE412 LSE415 LSE500	266.70 10.500	76 3.0
135 140				5 ³ / ₁₆ 5 ¹ / ₄ 5 ⁷ / ₁₆ 5 ¹ / ₂	LSM135 LSM140	LSE503 LSE504 LSE507 LSE508	422 94869	585 131513	25.80 5799.99			1570		241.30 9.500	55.60 2.189	98.40 3.874	LSM135 LSM140	LSE503 LSE504 LSE507 LSE508	279.40 11.000	76 3.0
	150 155 160A			5 ¹¹ / ₁₆ 5 ³ / ₄ 5 ¹⁵ / ₁₆ 6	LSM150 LSM155 LSM160A	LSE511 LSE512 LSE515 LSE600	459 103187	664 149273	29.40 6609.30	1450				254.00 10.000	55.60 2.189	98.40 3.874	LSM150 LSM155 LSM160A	LSE511 LSE512 LSE515 LSE600	295.28 11.625	82 3.2

Light Series Support


S01 - S10

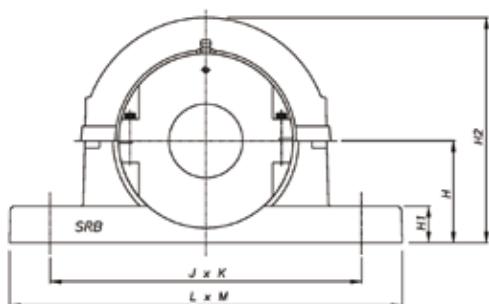

S01 - S10

mm	Shaft (d) inch	Support Reference	H	H ₁	H ₂	J x K	L x M	Bolts
35	1 ³ / ₁₆	S01	60	22	138	180	228 x 60	2 x M12
40	1 ¹ / ₄		2.362	0.9	5.4	7.1	9 x 2.4	
	1 ⁷ / ₁₆							
	1 ¹ / ₂	S02						2 x M16
45	1 ¹¹ / ₁₆		70	25	158	214	270 x 60	
50	1 ¹⁵ / ₁₆		2.756	1.0	6.2	8.4	10.6 x 2.4	
	2	S03						2 x M16
55	2 ³ / ₁₆		80	32	180	234	280 x 70	
60	2 ¹ / ₄		3.150	1.3	7.1	9.2	11 x 2.8	
65	2 ¹ / ₂	S04						2 x M20
70	2 ¹¹ / ₁₆		95	38	208	270	330 x 76	
75	2 ³ / ₄		3.740	1.5	8.2	10.6	13 x 3	
	2 ¹⁵ / ₁₆	S05						2 x M24
80	3		112	44	252	320	380 x 90	
85	3 ¹ / ₁₆		4.409	1.7	9.9	12.6	15 x 3.5	
90	3 ¹ / ₄	S06						2 x M24
	3 ³ / ₈		125	52	272	354	420 x 102	
100	3 ¹¹ / ₁₆		4.921	2.0	10.7	13.9	16.5 x 4	
105	3 ³ / ₄	S07						2 x M24
	3 ¹⁵ / ₁₆		143	60	314	392	466 x 120	
110	4		5.630	2.4	12.4	15.4	18.3 x 4.7	
	4 ¹ / ₁₆	S08						4 x M24
115	4 ¹ / ₄		162	38	372	450 x 120	508 x 178	
	4 ⁷ / ₁₆		6.378	1.5	14.6	17.7 x 4.7	20 x 7	
120	4 ¹¹ / ₁₆	S09						4 x M24
125	4 ³ / ₄		181	40	405	482 x 120	558 x 178	
130	4 ¹⁵ / ₁₆		7.126	1.6	15.9	19 x 4.7	22 x 7	
	5	S10						4 x M24
135	5 ³ / ₁₆		181	40	415	496 x 120	558 x 178	
140	5 ¹ / ₄		7.126	1.6	16.3	19.5 x 4.7	22 x 7	
	5 ⁷ / ₁₆	S10						4 x M24
150	5 ¹¹ / ₁₆		181	40	415	496 x 120	558 x 178	
155	5 ³ / ₄		7.126	1.6	16.3	19.5 x 4.7	22 x 7	
160A	5 ¹⁵ / ₁₆	S10						4 x M24
	6							


Light Series Bearing & Housing
160mm to 340mm

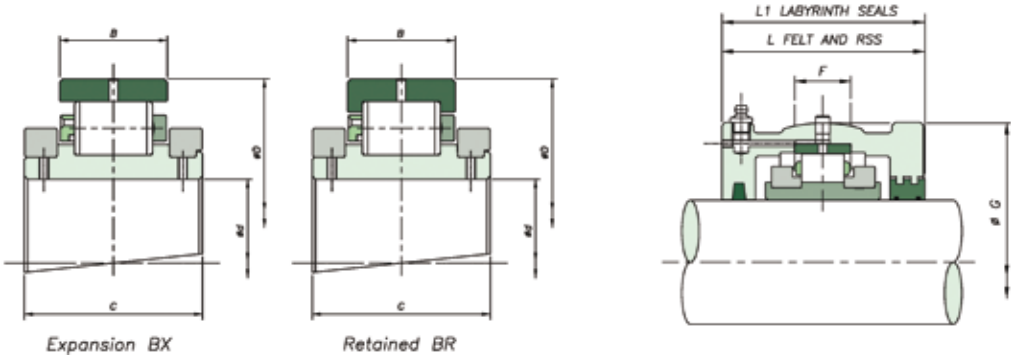

Shaft (d)		Reference		Bearings Ratings							Housing Reference					
mm	inch	Add BR for retained Add BX for expansion e.g. LSM35BR		Dynamic C (kN/lb)	Static C _r (kN/lb)	Axial C _a (kN/lb)	Max RPM	D	B	C	Add HR for retained Add HX for expansion e.g. LSM35HR		G	F	L	L ₁
160	6 ¹ / ₁₆	LSM160	LSE607	583	792	33.00	1320	273.05	60.30	109.00	LSM160	LSE607	311.15	76	172	192
170A	6 ¹ / ₂	LSM170A	LSE608	131064	178049	7419		10.750	2.374	4.291	LSM170A	LSE608	12.250	3.0	6.8	7.6
170	6 ¹¹ / ₁₆	LSM170	LSE611	524	828	36.40	1220	285.75	55.50	109.00	LSM170	LSE611	323.85	70	172	200
175	6 ³ / ₄	LSM175	LSE612								LSM175	LSE612				
180	6 ¹⁵ / ₁₆	LSM180	LSE615	117800	186142	8183	1070	11.250	2.185	4.291	LSM180	LSE615	12.750	2.8	6.8	7.9
	7		LSE700								LSE700					
	7 ¹ / ₄		LSE704								LSE704					
190	7 ¹ / ₂	LSM190	LSE708	614	990	41.00					LSM190	LSE708	358.78	86	172	200
200	7 ¹⁵ / ₁₆	LSM200	LSE715	138033	222561	9217	930	12.250	2.374	4.291	LSM200	LSE715	14.125	3.4	6.8	7.9
	8		LSE800								LSE800					
220	8 ¹ / ₂	LSM220	LSE808	708	1168	49.00					LSM220	LSE808	387.35	82	178	216
230	8 ⁷ / ₈	LSM230	LSE814	159165	262577	11016					LSM230	LSE814	15.250	3.2	7.0	8.5
	9		LSE900				820	342.90	63.50	115.00		LSE900				
240	9 ¹ / ₂	LSM240	LSE908	744	1289	57.80					LSM240	LSE908	419.10	90	188	222
250	9 ³ / ₄	LSM250	LSE912	167258	289779	12994					LSM250	LSE912	16.500	3.5	7.4	8.7
	10		LSE1000									LSE1000				
260	10 ¹ / ₂	LSM260	LSE1008	848	1502	66.80	730	406.40	69.00	128.00	LSM260	LSE1008	454.00	95	204	232
270	10 ³ / ₄	LSM270	LSE1012	190638	337663	15017					LSM270	LSE1012	17.874	3.7	8.0	9.1
280	11	LSM280	LSE1100								LSM280	LSE1100				
300	11 ¹ / ₂	LSM300	LSE1108	929	1665	78.20	650	438.15	74.60	143.00	LSM300	LSE1108	489.00	98	216	248
305	12	LSM305	LSE1200	208848	374307	17580					LSM305	LSE1200	19.252	3.9	8.5	9.8
320	12 ¹ / ₂	LSM320	LSE1208	920	1674	89.00	590	463.55	74.60	136.00	LSM320	LSE1208	520.70	95	260	—
330	13	LSM330	LSE1300	206824	376330	20008					LSM330	LSE1300	20.500	3.7	10.2	—
340	14	LSM340	LSE1400	1022	1965	99.60	540	488.95	74.60	136.00	LSM340	LSE1400	546.10	98	260	—
350		LSM350		229755	441745	22391					LSM350		21.500	3.9	10.2	—

Light Series Support




S11 - S19

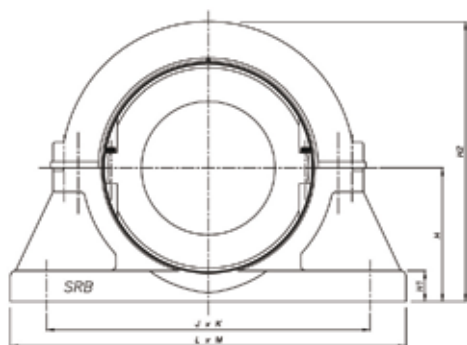

S11 - S19

Shaft (d)	Support							
mm	inch	Reference	H	H ₁	H ₂	J x K	L x M	Bolts
160	6 ⁷ / ₁₆	S11	213	32	430	368 x 114	508 x 178	4 x M24
170A	6 ¹ / ₂		8.386	1.3	16.9	14.5 x 4.5	20 x 7	
170	6 ¹¹ / ₁₆	S12	235	35	470	388 x 128	534 x 190	4 x M24
175	6 ³ / ₄		9.252	1.4	18.5	15.3 x 5	21 x 7.5	
180	7							
	7 ¹ / ₄							
190	7 ¹ / ₂	S13	248	38	495	422 x 140	572 x 204	4 x M24
200	7 ¹⁵ / ₁₆		9.764	1.5	19.5	16.6 x 5.5	22.5 x 8	
	8							
220	8 ¹ / ₂	S14	270	40	540	460 x 140	636 x 216	4 x M30
230	8 ⁷ / ₈		10.630	1.6	21.3	18.1 x 5.5	25 x 8.5	
	9							
240	9 ¹ / ₂	S15	292	44	585	502 x 140	686 x 228	4 x M30
250	9 ³ / ₄		11.496	1.7	23.0	19.8 x 5.5	27 x 9	
	10							
260	10 ¹ / ₂	S16	311	48	620	534 x 140	724 x 228	4 x M30
270	10 ³ / ₄		12.244	1.9	24.4	21 x 5.5	28.5 x 9	
280	11							
300	11 ¹ / ₂	S17	343	50	685	584 x 178	762 x 254	4 x M30
305	12		13.504	2.0	27.0	23 x 7	32 x 10	
320	12 ¹ / ₂	S18	368	54	735	622 x 178	812 x 254	4 x M36
330	13		14.488	2.1	28.9	24.5 x 7	32 x 10	
340	14	S19	387	57	775	654 x 166	850 x 254	4 x M36
350			15.236	2.2	30.5	25.7 x 6.5	33.5 x 10	

Light Series Bearing & Housing
360mm to 600mm

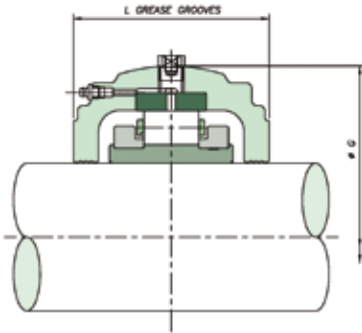


Shaft (d)		Reference		Bearings Ratings						
mm	inch	Add BR for retained Add BX for expansion e.g. LSM35BR		Dynamic C _r (kN/lb)	Static C _{or} (kN/lb)	Axial C _a (kN/lb)	Max RPM	D	B	C
360	15	LSM360	LSE1500	1224	2431	110.40	500	520.70	76.20	140.00
380		LSM380		275166	546511	24819		20.500	3.000	5.512
400	16	LSM400	LSE1600	1107	2266	115.60	460	546.10	76.20	140.00
				248864	509417	25988		21.500	3.000	5.512
420	17	LSM420	LSE1700	1146	2418	121.00	430	571.50	76.20	140.00
				257631	543588	27202		22.500	3.000	5.512
440	18	LSM440	LSE1800	1185	2469	127.20	410	596.90	76.20	140.00
460		LSM460		266399	555053	28596		23.500	3.000	5.512
480	19	LSM480	LSE1900	1348	2965	132.60	380	628.65	81.00	144.00
				303042	666559	29810		24.750	3.189	5.669
500	20	LSM500	LSE2000	1392	3139	137.80	360	654.05	80.20	168.00
				312934	705675	30979		25.750	3.157	6.614
530	21	LSM530	LSE2100	1431	3316	140.60	340	692.15	81.00	168.00
				321702	745466	31608		27.250	3.189	6.614
560	22	LSM560	LSE2200	1472	3490	142.40	330	717.55	81.00	168.00
				330919	784583	32013		28.250	3.189	6.614
580	23	LSM580	LSE2300	1616	3841	144.00	310	749.00	84.10	172.00
				363291	863491	32372		29.488	3.311	6.772
600	24	LSM600	LSE2400	1660	4033	146.80	300	774.70	84.10	172.00
				373183	906654	33002		30.500	3.311	6.772

Housing Reference					
Add HR for retained Add HX for expansion e.g. LSM35HR		G	F	L	L ₁
LSM360	LSE1500	571.50	98	260	-
LSM380		22.500	3.9	10.2	
LSM400	LSE1600	603.30	102	280	-
		23.752	4.0	11.0	
LSM420	LSE1700	628.70	102	292	-
		24.752	4.0	11.5	
LSM440	LSE1800	650.90	108	304	-
LSM460		25.626	4.3	12.0	
LSM480	LSE1900	682.60	108	304	-
		26.874	4.3	12.0	
LSM500	LSE2000	717.60	114	304	-
		28.252	4.5	12.0	
LSM530	LSE2100	755.70	114	330	-
		29.752	4.5	13.0	
LSM560	LSE2200	781.10	114	336	-
		30.752	4.5	13.2	
LSM580	LSE2300	816.00	120	342	-
		32.126	4.7	13.5	
LSM600	LSE2400	841.40	120	342	-
		33.126	4.7	13.5	

Light Series Support

S20 - S29

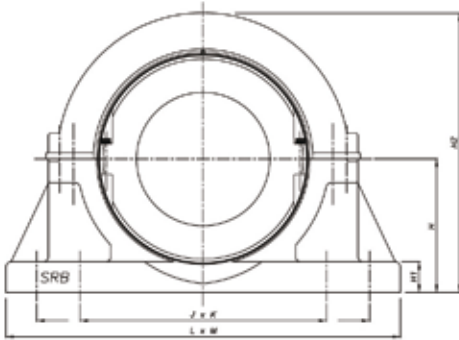

S20 - S29

Shaft (d) mm	inch	Support Reference	H	H ₁	H ₂	J x K	L x M	Bolts
360	15	S20	397	60	795	676 x 166	902 x 254	4 x M36
380			15.630	2.4	31.3	26.6 x 6.5	35.5 x 10	
400	16	S21	432	67	865	724 x 166	940 x 254	4 x M36
			17.008	2.6	34.1	28.5 x 6.5	37 x 10	
420	17	S22	445	67	890	756 x 166	966 x 254	4 x M36
			17.520	2.6	35.0	29.8 x 6.5	38 x 10	
440	18	S23	464	70	925	788 x 190	1042 x 280	4 x M42
460			18.268	2.8	36.4	31 x 7.5	41 x 11	
480	19	S24	483	73	965	816 x 188	1092 x 304	4 x M42
			19.016	2.9	38.0	32.1 x 7.4	43 x 12	
500	20	S25	489	76	980	844 x 216	1092 x 304	4 x M42
			19.252	3.0	38.6	33.2 x 8.5	43 x 12	
530	21	S26	533	80	1065	904 x 206	1194 x 304	4 x M42
			20.984	3.1	41.9	35.6 x 8.1	47 x 12	
560	22	S27	552	83	1110	936 x 206	1220 x 304	4 x M42
			21.732	3.3	43.7	36.9 x 8.1	48 x 12	
580	23	S28	578	83	1156	1080 & 877 x 220	1372 x 304	8 x M36
			22.756	3.3	45.5	42.5 & 34.5 x 8.7	54 x 12	
600	24	S29	597	90	1200	1118 & 908 x 200	1372 x 304	8 x M36
			23.504	3.5	47.2	44 & 35.7 x 7.9	54 x 12	

Flange Units

When faced with flat horizontal or vertical faces, flange units offer a simple mounting solution.

As with Pillow block supports, Flange units are produced with spherical location to accommodate standard bearing housings and provide easy initial alignment of shaft and equipment.


To facilitate positive location of the flange to the surface, the rear face is recessed (dimensions N & V).

This allows for a spigot (Tolerance f8) to be located into the flange.

Bearing inspection is simply a matter of removing the top half of the flange and housing. Bearing replacement may also be achieved in the same manner if required.

When integrating flange units into new applications, it should be noted that a maximum radial load equivalent to $0.26C_{or}$ is permissible. A maximum axial load of $0.25C_a$ must also be taken into account for applications with thrust loading. Units for vertically oriented shafts may also need special consideration given to sealing arrangements.

As always, SRB Technical Services will be happy to advise on any application issues.

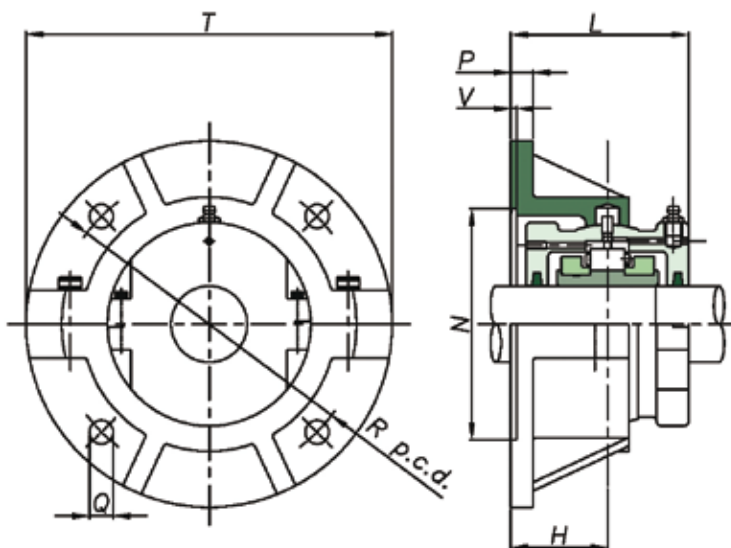

Light Series Support

40mm - 300mm Flanges

Light Series 40mm - 300mm Flanges



Shaft (d) mm	inch	Flange Reference	T	Bolts	R	P	H	N	V	L
35	1 ³ / ₁₆	F01	204	4 x M12	164	13	51	119.06	3	94
40	1 ¹ / ₄		8.0		6.5	0.5	2.0	4.687	0.1	3.7
	1 ⁷ / ₁₆									
	1 ¹ / ₂									
45	1 ¹¹ / ₁₆	F02	216	4 x M12	180	13	57	136.52	3	106
50	1 ³ / ₄		8.5		7.1	0.5	2.2	5.375	0.1	4.2
	1 ⁵ / ₁₆									
	2									
55	2 ³ / ₁₆	F03	260	4 x M12	218	16	67	166.96	3	120
60	2 ¹ / ₄		10.2		8.6	0.6	2.6	571	0.1	4.7
65	2 ⁷ / ₁₆									
	2 ¹ / ₂									
70	2 ¹¹ / ₁₆	F04	286	4 x M12	242	16	73	192.09	3	130
75	2 ³ / ₄		11.3		9.5	0.6	2.9	7.563	0.1	5.1
	2 ⁵ / ₁₆									
	3									
80	3 ³ / ₁₆	F05	330	4 x M16	274	19	79	215.98	3	148
85	3 ¹ / ₄		13.0		10.8	0.7	3.1	500	0.1	5.8
90	3 ⁷ / ₁₆									
	3 ¹ / ₂									
100	3 ¹¹ / ₁₆	F06	356	4 x M16	302	19	86	244.47	3	154
105	3 ³ / ₄		14.0		11.9	0.7	3.4	9.625	0.1	6.1
	3 ⁵ / ₁₆									
	4									
110	4 ³ / ₁₆	F07	382	4 x M16	334	22	92	276.22	3	164
115	4 ¹ / ₄		15.0		13.1	0.9	3.6	10.875	0.1	6.5
	4 ⁷ / ₁₆									
	4 ¹ / ₂									
120	4 ¹¹ / ₁₆	F08	432	4 x M24	374	22	98	314.32	3	176
125	4 ³ / ₄		17.0		14.7	0.9	3.9	12.375	0.1	6.9
130	4 ⁵ / ₁₆									
	5									
135	5 ³ / ₁₆	F09	444	4 x M24	384	25	98	317.51	3	182
140	5 ¹ / ₄		17.5		15.1	1.0	3.9	2.500	0.1	7.2
	5 ⁷ / ₁₆									
	5 ¹ / ₂									
150	5 ¹¹ / ₁₆	F10	470	4 x M24	412	25	114	346.07	3	202
155	5 ³ / ₄		18.5		16.2	1.0	4.5	13.625	0.1	8.0
160A	5 ⁵ / ₁₆									
	6									
160	6 ⁷ / ₁₆	F11	496	4 x M24	426	25	105	352.42	3	202
170A	6 ¹ / ₂		19.5		16.8	1.0	4.1	13.875	0.1	8.0
170	6 ¹¹ / ₁₆	F12	508	4 x M24	438	29	108	365.12	3	208
175	6 ³ / ₄		20.0		17.2	1.1	4.3	14.375	0.1	8.2
180	6 ⁵ / ₁₆									
	7									
190	7 ¹ / ₄	F13	534	4 x M24	474	32	108	400.05	3	208
200	7 ¹ / ₂		21.0		18.7	1.3	4.3	15.750	0.1	8.2
	7 ⁵ / ₁₆									
	8									
220	8 ¹ / ₂	F14	584	4 x M30	512	35	117	431.81	3	226
230	8 ⁷ / ₈		23.0		20.2	1.4	4.6	7.000	0.1	8.9
	9									
240	9 ¹ / ₂	F15	610	4 x M30	542	35	117	463.55	3	228
250	9 ³ / ₄		24.0		21.3	1.4	4.6	18.250	0.1	9.0
	10									
260	10 ¹ / ₂	F16	660	4 x M30	584	38	124	504.82	3	240
270	10 ³ / ₄		26.0		23.0	1.5	4.9	19.875	0.1	9.4
280	11									
300	11 ¹ / ₂	F17	712	4 x M30	626	38	133	539.75	3	258
305	12		28.0		24.6	1.5	5.2	21.250	0.1	10.2

For Bearings and Housings see pages 23 – 28

Tensioning Units

This type of split unit can be found in use on materials handling equipment in many industries. Take up units provide an efficient and readily accessible means of tensioning conveyor systems and large scale drives.

The units consist of either push type or pull type sliding supports into which standard housings and bearings may be mounted. When integrating tensioning units into new applications, it should be noted that a maximum radial load equivalent to $0.3C_{or}$ is permissible. As with all SRB Units, a wide variety of sealing solutions may be applied dependant on the environment and application. Please contact SRB Technical Services for assistance.

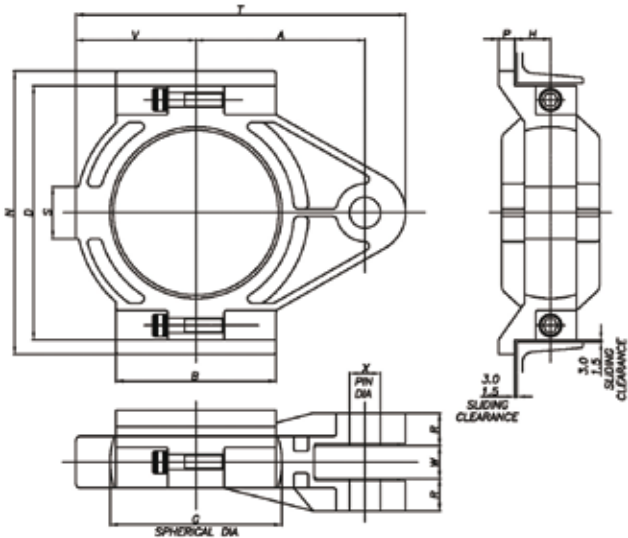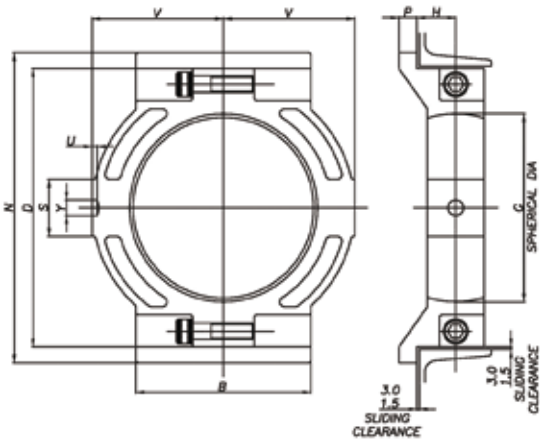

Tensioning Units TT/TP


Light Series 40mm to 150mm

Shaft (d)		Support Reference														
mm	inch	Tension Type	Push Type	B	N	D	V	P	H	L	S	A	T	X	W	R
35	1 ³ / ₁₆	TT01	TP01	102	172	153	76	14	29	86	25	114	216	20	25	24
40	1 ¹ / ₄			4.0	6.8	6.0	3.0	0.6	1.1	3.4	1.0	4.5	8.5	0.8	1.0	0.9
	1 ⁷ / ₁₆															
45	1 ¹¹ / ₁₆	TT02	TP02	114	204	178	88	16	29	98	29	128	242	24	25	25
50	1 ³ / ₄			4.5	8.0	7.0	3.5	0.6	1.1	3.9	1.1	5.0	9.5	0.9	1.0	1.0
	1 ¹⁵ / ₁₆															
55	2	TT03	TP03	128	235	203	102	20	32	104	38	146	280	24	30	29
60	2 ¹ / ₄			5.0	9.3	8.0	4.0	0.8	1.3	4.1	1.5	5.7	11.0	0.9	1.2	1.1
65	2 ¹ / ₂															
70	2 ¹¹ / ₁₆	TT04	TP04	152	266	229	114	22	40	114	41	158	305	24	30	114
75	2 ³ / ₄			6.0	10.5	9.0	4.5	0.9	1.6	4.5	1.6	6.2	12.0	0.9	1.2	4.5
	2 ¹⁵ / ₁₆															
80	3	TT05	TP05	190	318	280	140	22	40	136	51	190	368	30	38	35
85	3 ¹ / ₄			7.5	12.5	11.0	5.5	0.9	1.6	5.4	2.0	7.5	14.5	1.2	1.5	1.4
90	3 ¹ / ₂															
100	3 ¹¹ / ₁₆	TT06	TP06	204	342	305	152	22	43	134	51	210	414	36	44	35
105	3 ³ / ₄			8.0	13.5	12.0	6.0	0.9	1.7	5.3	2.0	8.3	16.3	1.4	1.7	1.4
	3 ¹⁵ / ₁₆															
110	4	TT07	TP07	216	382	343	162	22	48	142	70	228	445	42	44	41
115	4 ¹ / ₄			8.5	15.0	13.5	6.4	0.9	1.9	5.6	2.8	9.0	17.5	1.7	1.7	1.6
	4 ⁷ / ₁₆															
120	4 ¹¹ / ₁₆	TT08	TP08	254	420	381	190	25	51	156	76	260	508	42	44	44
125	4 ³ / ₄			10.0	16.5	15.0	7.5	1.0	2.0	6.1	3.0	10.2	20.0	1.7	1.7	1.7
130	4 ¹⁵ / ₁₆															
135	5	TT09	TP09	266	438	400	196	25	54	168	76	266	514	42	44	48
140	5 ¹ / ₄			10.5	17.2	15.7	7.7	1.0	2.1	6.6	3.0	10.5	20.2	1.7	1.7	1.9
	5 ⁷ / ₁₆															
150	5 ¹¹ / ₁₆	TT10	TP10	266	464	426	204	25	57	174	86	280	546	48	50	51
155	5 ³ / ₄			10.5	18.3	16.8	8.0	1.0	2.2	6.9	3.4	11.0	21.5	1.9	2.0	2.0
160A	5 ¹⁵ / ₁₆															
	6															

Hanger Units

SRB Hanger Units are the optimum solution for the support of screw conveyor shafts. The unit comprises of a cast iron split housing into which standard SRB bearings are fitted. Provision of a drilled and tapped boss in one half of the housing allows for the unit to be mounted from the conveyor cross bracing or any other suitable surface. It is recommended that some form of swivel fixing be incorporated into the mounting arrangement to allow for static alignment.

Due to the arduous conditions often found in screw conveyor applications, correct seal selection is critical. SRB Hanger units are available with many sealing variants, all of which can also be tailored to suit specific applications. When integrating hanging units into new applications, it should be noted that a maximum radial load equivalent to 0.3C_{rr} is permissible. Please contact SRB Technical Services for further information.

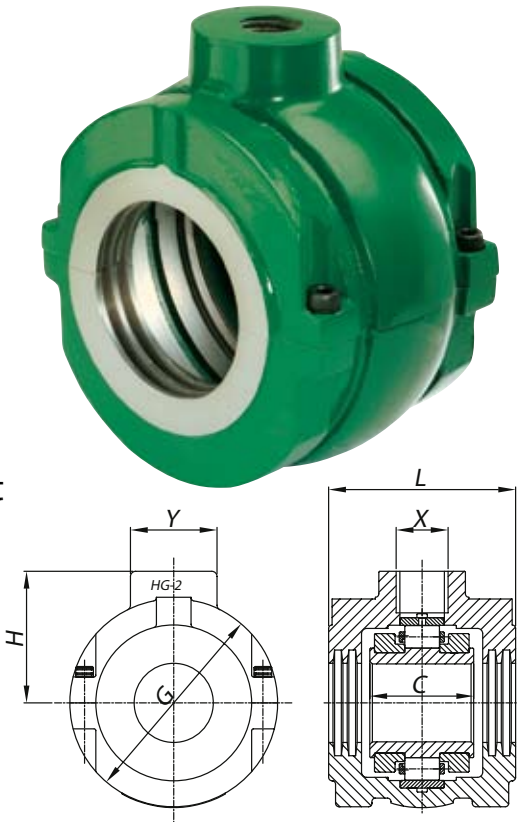


Light Series Hanger Units									
Shaft (d)		Reference		C	G	L	H	X	Y
mm	inch								
35	1 3/16	LSM35HG	LSE103HG						
40	1 1/4	LSM40HG	LSE104HG	55.0	100	108	66	M30	50
	1 7/16		LSE107HG	2.165	3.9	4.3	2.6		2.0
	1 1/2		LSE108HG						
45	1 11/16	LSM45HG	LSE111HG	60.0	117	108	76	M30	50
50	1 3/4	LSM50HG	LSE112HG						
	1 15/16		LSE115HG	2.362	4.6	4.3	3.0		2.0
	2		LSE200HG						
55	2 1/16	LSM55HG	LSE203HG	60.0	135	108	82	M30	50
60	2 1/4	LSM60HG	LSE204HG						
65	2 1/8	LSM65HG	LSE207HG	2.362	5.3	4.3	3.2		2.0
	2 1/2		LSE208HG						
70	2 11/16	LSM70HG	LSE211HG	65.0	157	130	92	M30	50
75	2 3/4	LSM75HG	LSE212HG						
	2 15/16		LSE215HG	2.559	6.2	5.1	3.6		2.0
	3		LSE300HG						
80	3 1/16	LSM80HG	LSE303HG	75.0	178	146	114	M36	76
85	3 1/4	LSM85HG	LSE304HG						
90	3 1/8	LSM90HG	LSE307HG	2.953	7.0	5.7	4.5		3.0
	3 1/2		LSE308HG						
100	3 11/16	LSM100HG	LSE311HG	85.0	203	152	128	M36	76
105	3 3/4	LSM105HG	LSE312HG						
	3 15/16		LSE315HG	3.346	8.0	6.0	5.0		3.0
	4		LSE400HG						
110	4 3/16	LSM110HG	LSE403HG	90.0	232	156	140	M36	76
115	4 1/4	LSM115HG	LSE404HG						
	4 7/16		LSE407HG	3.543	9.1	6.1	5.5		3.0
	4 1/2		LSE408HG						


Medium Series

Medium Series bearing products can be utilised in applications requiring higher load carrying capacity. Under nominal conditions, Medium Series may also be selected to provide an extended bearing life when compared to Light Series. Medium Series offers the same range of mounting and sealing solutions as Light Series, with the exception of Hanger units. If a standard catalogue product does not meet your requirements, SRB Technical Services will be happy to provide help and advice on your application.


Bearings, Housings & Supports	50mm to 150mm	Page	35 – 36
	160mm to 340mm	Page	37 – 38
	380mm to 600mm	Page	39 – 40
Flange Units		Page	41 – 42
Tensioning Units		Page	43 – 44

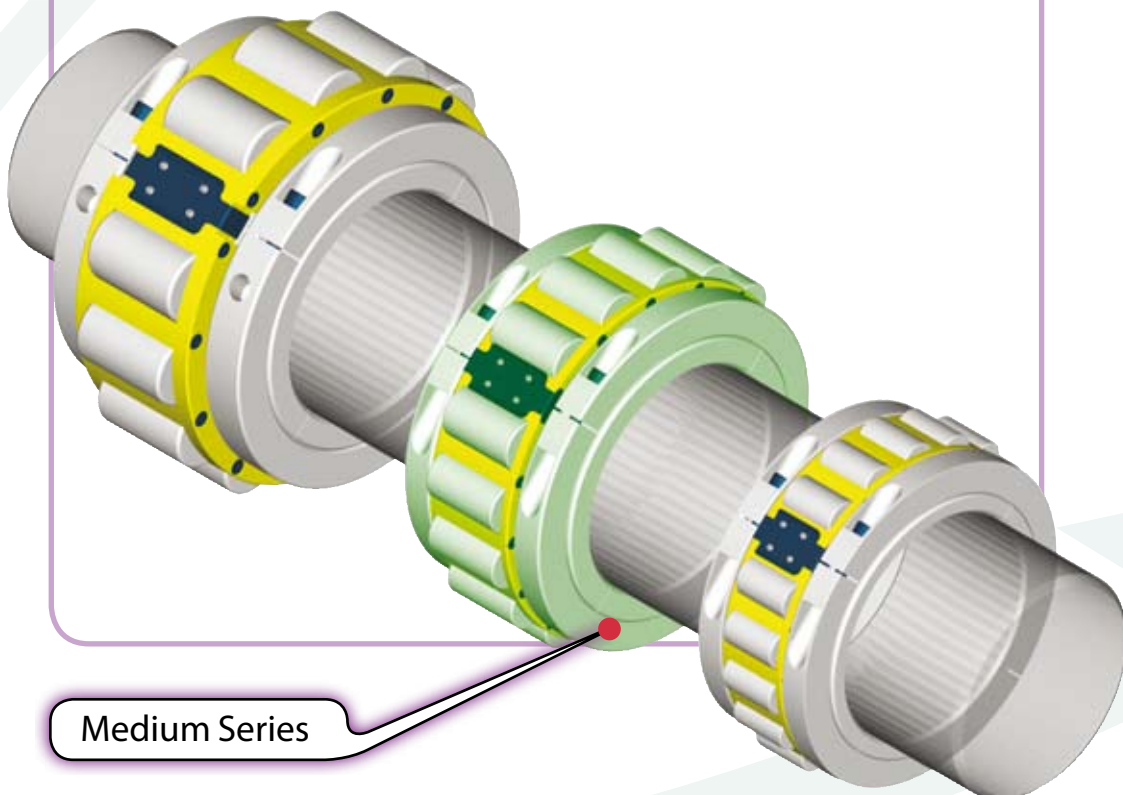


Medium Series Bearing & Housing 50mm to 150mm



Expansion BX



Retained BR

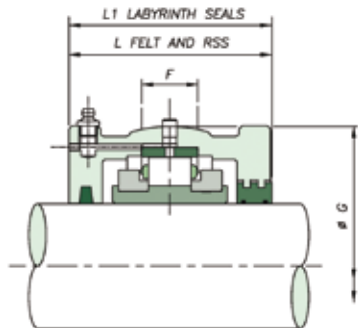


Shaft (d)		Reference		Bearings Ratings						
mm	inch	Add BR for retained Add BX for expansion e.g. MSM55BR		Dynamic C _r (kN/lb)	Static C _{or} (kN/lb)	Axial C _a (kN/lb)	Max RPM	D	B	C
45	1 ¹¹ / ₁₆		MSE111							
	1 ³ / ₄	MSM45	MSE112	121	127	6.20	4350	107.95	35.00	67.50
50	1 ¹⁵ / ₁₆	MSM50	MSE115	27202	28551	1394		4.250	1.378	2.657
	2		MSE200							
55	2 ³ / ₁₆		MSE203				3680	127.00	38.90	72.30
	2 ¹ / ₄	MSM55	MSE204	168	190	8.80		5.000	1.531	2.846
60	2 ⁷ / ₁₆	MSM60	MSE207	37768	42714	1978				
65	2 ¹ / ₂	MSM65	MSE208							
70	2 ¹¹ / ₁₆		MSE211				3080	149.22	46.10	82.60
	2 ³ / ₄	MSM70	MSE212	258	300	10.60		5.875	1.815	3.252
75	2 ¹⁵ / ₁₆	MSM75	MSE215	58001	67443	2383				
	3		MSE300							
80	3 ³ / ₁₆		MSE303				2520	169.86	48.40	89.70
	3 ¹ / ₄	MSM80	MSE304	297	353	17.80		6.687	1.906	3.531
85	3 ⁷ / ₁₆	MSM85	MSE307	66768	79358	4002				
90	3 ¹ / ₂	MSM90	MSE308							
100	3 ¹¹ / ₁₆		MSE311				2130	193.68	51.60	92.10
	3 ³ / ₄	MSM100	MSE312	388	491	25.00		7.625	2.031	3.626
105	3 ¹⁵ / ₁₆	MSM105	MSE315	87226	110381	5620				
	4		MSE400							
110	4 ³ / ₁₆		MSE403				1820	228.60	57.20	100.00
	4 ¹ / ₄	MSM110	MSE404	454	592	31.20		9.000	2.252	3.937
115	4 ⁷ / ₁₆	MSM115	MSE407	102063	133087	7014				
	4 ¹ / ₂		MSE408							
120	4 ¹¹ / ₁₆		MSE411				1600	254.00	63.50	114.30
	4 ³ / ₄	MSM120	MSE412	525	700	38.20		10.000	2.500	4.500
125	4 ¹⁵ / ₁₆	MSM125	MSE415	118025	157366	8588				
130	5	MSM130	MSE500							
135	5 ³ / ₁₆		MSE503				1450	273.05	66.70	117.50
	5 ¹ / ₄	MSM135	MSE504	600	817	45.40		10.750	2.626	4.626
140	5 ⁷ / ₁₆	MSM140	MSE507	134885	183669	10206				
	5 ¹ / ₂		MSE508							
150	5 ¹¹ / ₁₆		MSE511				1320	292.10	68.30	123.80
	5 ³ / ₄	MSM150	MSE512	730	1034	52.40		11.500	2.689	4.874
155	5 ¹⁵ / ₁₆	MSM155	MSE515	164111	232453	11780				
160A	6	MSM160A	MSE600							

Housing Reference					
Add HR for retained Add HX for expansion e.g. MSM55HR		G	F	L	L ₁
MSM45 MSM50	MSE111				
	MSE112	134.94	32	112	114
	MSE115	5.313	1.3	4.4	4.5
	MSE200				
MSM55 MSM60 MSM65	MSE203				
	MSE204	157.16	38	124	126
	MSE207	6.187	1.5	4.9	5.0
	MSE208				
MSM70 MSM75	MSE211				
	MSE212	177.80	50	138	140
	MSE215	7.000	2.0	5.4	5.5
	MSE300				
MSM80 MSM85 MSM90	MSE303				
	MSE304	203.20	50	152	154
	MSE307	8.000	2.0	6.0	6.1
	MSE308				
MSM100 MSM105	MSE311				
	MSE312	231.78	64	144	146
	MSE315	9.125	2.5	5.7	5.7
	MSE400				
MSM110 MSM115	MSE403				
	MSE404	266.70	76	160	162
	MSE407	10.500	3.0	6.3	6.4
	MSE408				
MSM120 MSM125 MSM130	MSE411				
	MSE412	295.28	82	182	184
	MSE415	11.625	3.2	7.2	7.2
	MSE500				
MSM135 MSM140	MSE503				
	MSE504	323.85	90	186	188
	MSE507	12.750	3.5	7.3	7.4
	MSE508				
MSM150 MSM155 MSM160A	MSE511				
	MSE512	336.55	95	202	204
	MSE515	13.250	3.7	8.0	8.0
	MSE600				

Medium Series Support

S03 - S31


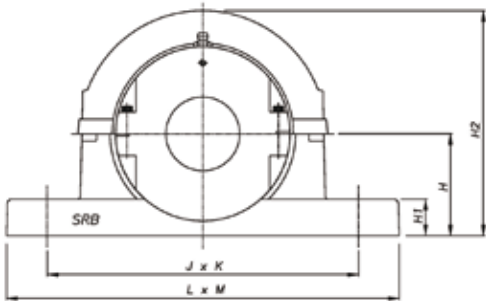


S03 - S31

Shaft (d)		Support Reference	H	H ₁	H ₂	J x K	L x M	Bolts
mm	inch							
45	1 ¹¹ / ₁₆	S03	80	32	180	234	280 x 70	2 x M16
50	1 ³ / ₄		3.150	1.3	7.1	9.2	11 x 2.8	
	2							
55	2 ³ / ₁₆	S04	95	38	208	270	330 x 76	2 x M20
60	2 ¹ / ₄		3.740	1.5	8.2	10.6	13 x 3	
65	2 ⁷ / ₁₆							
	2 ¹ / ₂							
70	2 ¹¹ / ₁₆	S05	112	44	252	320	380 x 90	2 x M24
75	2 ³ / ₄		4.409	1.7	9.9	12.6	15 x 3.5	
	2 ¹⁵ / ₁₆							
	3							
80	3 ³ / ₁₆	S06	125	52	272	354	420 x 102	2 x M24
85	3 ¹ / ₄		4.921	2.0	10.7	13.9	16.5 x 4	
90	3 ⁷ / ₁₆							
	3 ¹ / ₂							
100	3 ¹¹ / ₁₆	S07	143	60	314	392	466 x 120	2 x M24
105	3 ³ / ₄		5.630	2.4	12.4	15.4	18.3 x 4.7	
	3 ¹⁵ / ₁₆							
	4							
110	4 ³ / ₁₆	S08	162	38	372	450 x 120	508 x 178	4 x M24
115	4 ¹ / ₄		6.378	1.5	14.6	17.7 x 4.7	20 x 7	
	4 ⁷ / ₁₆							
	4 ¹ / ₂							
120	4 ¹¹ / ₁₆	S10	181	40	415	496 x 120	558 x 178	4 x M24
125	4 ³ / ₄		7.126	1.6	16.3	19.5 x 4.7	22 x 7	
130	4 ¹⁵ / ₁₆							
	5							
135	5 ³ / ₁₆	S30	203	50	460	546 x 120	610 x 178	4 x M24
140	5 ¹ / ₄		7.992	2.0	18.1	21.5 x 4.7	24 x 7	
	5 ⁷ / ₁₆							
	5 ¹ / ₂							
150	5 ¹¹ / ₁₆	S31	210	50	470	558 x 128	636 x 204	4 x M24
155	5 ³ / ₄		8.268	2.0	18.5	22 x 5	25 x 8	
160A	5 ¹⁵ / ₁₆							
	6							

Medium Series Bearing & Housing


160mm to 340mm

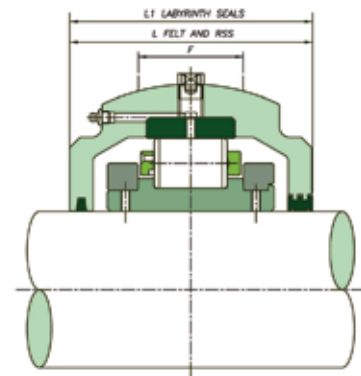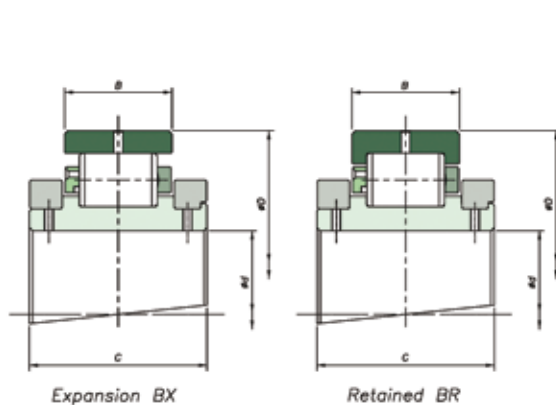

Shaft (d)		Reference		Bearings Ratings							Housing Reference					
mm	inch	Add BR for retained Add BX for expansion e.g. MSM160BR		Dynamic C _r (kN/lb)	Static C _{0r} (kN/lb)	Axial C _a (kN/lb)	Max RPM	D	B	C	Add HR for retained Add HX for expansion e.g. MSM160HR		G	F	L	L ₁
160	6 ⁷ / ₁₆	MSM160	MSE607	842	1175	61.40	1200	317.50	83.30	140.00	MSM160	MSE607	368.30	95	206	232
170	6 ¹ / ₂	MSM170	MSE608	189289	264151	13803		12.500	3.280	5.512	MSM170	MSE608	14.500	3.7	8.1	9.1
	6 ¹¹ / ₁₆		MSE611									MSE611				
175	6 ³ / ₄	MSM175	MSE612	927	1357	71.20	1120	330.20	83.30	140.00	MSM175	MSE612	381.00	95	222	242
180	6 ¹⁵ / ₁₆	MSM180	MSE615	208398	305066	16006		13.000	3.280	5.512	MSM180	MSE615	15.000	3.7	8.7	9.5
	7		MSE700									MSE700				
	7 ¹ / ₄		MSE704									MSE704				
190	7 ¹ / ₂	MSM190	MSE708	1013	1516	80.00	960	368.30	90.50	156.00	MSM190	MSE708	425.50	105	235	258
200	7 ¹⁵ / ₁₆	MSM200	MSE715	227732	340810	17985		14.500	3.563	6.142	MSM200	MSE715	16.752	4.1	9.3	10.2
	8		MSE800									MSE800				
	8 ¹ / ₂		MSE808									MSE808				
220	8 ⁷ / ₈	MSM220	MSE814	1138	1668	89.80	850	393.70	90.50	163.00	MSM220	MSE814	457.20	110	242	274
230	9	MSM230	MSE900	255833	374981	20188		15.500	3.563	6.417	MSM230	MSE900	18.000	4.3	9.5	10.8
240	9 ¹ / ₂	MSM240	MSE908	1354	2117	98.80	750	431.80	96.80	170.00	MSM240	MSE908	495.30	118	248	280
250	9 ³ / ₄	MSM250	MSE912	304391	475921	22211		17.000	3.811	6.693	MSM250	MSE912	19.500	4.6	9.8	11.0
260	10	MSM260	MSE1000								MSM260	MSE1000				
	10 ¹ / ₂		MSE1008									MSE1008				
270	10 ³ / ₄	MSM270	MSE1012	1476	2357	113.80	670	463.55	101.60	186.00	MSM270	MSE1012	527.10	130	264	300
280	11	MSM280	MSE1100	331818	529875	25583		18.250	4.000	7.323	MSM280	MSE1100	20.752	5.1	10.4	11.8
300	11 ¹ / ₂	MSM300	MSE1108	1587	2644	129.00	610	495.30	103.20	193.00	MSM300	MSE1108	552.50	128	268	306
305	12	MSM305	MSE1200	356772	594395	29000		19.500	4.063	7.598	MSM305	MSE1200	21.752	5.0	10.6	12.0
320	12 ¹ / ₂	MSM320	MSE1208	1723	2922	144.20	550	527.05	106.40	192.00	MSM320	MSE1208	587.40	128	298	—
330	13	MSM330	MSE1300	387346	656892	32417		20.750	4.189	7.559	MSM330	MSE1300	23.126	5.0	11.7	—
340	14	MSM340	MSE1400	1989	3403	159.20	500	565.15	115.90	200.00	MSM340	MSE1400	628.70	146	305	—
360		MSM360		447145	765025	35790		22.250	4.563	7.874	MSM360		24.752	5.7	12.0	—

Medium Series Support


S32 - S40

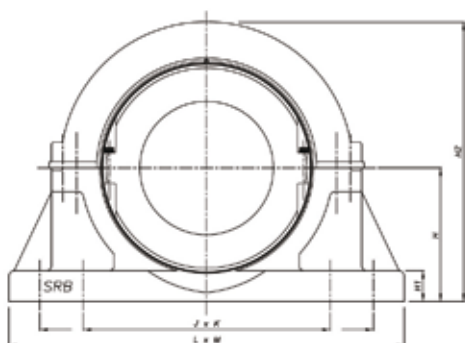

S32 - S40

Shaft (d) mm	inch	Support Reference	H	H ₁	H ₂	J x K	L x M	Bolts
160	6 ⁷ / ₁₆	S32	267	44	535	448 x 172	596 x 242	4 x M30
170	6 ¹ / ₂		10.512	1.7	21.1	17.6 x 6.8	23.5 x 9.5	
175	6 ¹¹ / ₁₆	S33	273	44	545	458 x 166	636 x 242	4 x M30
180	6 ¹⁵ / ₁₆		10.748	1.7	21.5	18 x 6.5	25 x 9.5	
190	7 ¹ / ₄	S34	305	50	610	508 x 190	686 x 266	4 x M30
200	7 ¹⁵ / ₁₆		12.008	2.0	24.0	20 x 7.5	27 x 10.5	
220	8 ¹ / ₂	S35	324	50	650	550 x 190	750 x 280	4 x M30
230	8 ⁷ / ₈		12.756	2.0	25.6	21.7 x 7.5	29.5 x 11	
240	9 ¹ / ₂	S36	356	54	710	596 x 204	812 x 292	4 x M36
250	9 ³ / ₄		14.016	2.1	28.0	23.5 x 8	32 x 11.5	
260	10	S37	378	60	760	736 & 534 x 254	914 x 330	8 x M30
270	10 ¹ / ₂		14.882	2.4	29.9	29 & 21 x 10	36 x 13	
280	10 ³ / ₄	S38	394	60	790	768 & 566 x 254	958 x 330	8 x M30
300	11 ¹ / ₂		15.512	2.4	31.1	30.2 & 22.3 x 10	37.7 x 13	
305	12	S39	419	64	840	812 & 610 x 210	1016 x 292	8 x M30
320	12 ¹ / ₂		16.496	2.5	33.1	32 & 24 x 8.3	40 x 11.5	
330	13	S40	451	67	900	864 & 660 x 280	1092 x 368	8 x M36
340	14		17.756	2.6	35.4	34 & 26 x 11	43 x 14.5	
360								

Medium Series Bearing & Housing 380mm to 600mm

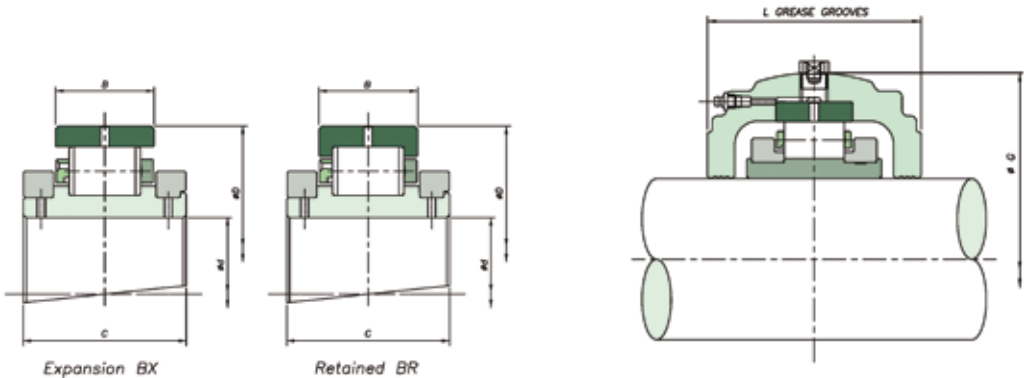


Shaft (d)		Reference	Bearings Ratings						
mm	inch	Add BR for retained Add BX for expansion e.g. MSM380BR	Dynamic C _r (kN/lb)	Static C _{0r} (kN/lb)	Axial C _a (kN/lb)	Max RPM	D	B	C
380	15	MSM380 MSE1500	1931 434106	3522 791777	174.40 39207	460	584.20 23.000	111.10 4.374	200.00 7.874
400	16	MSM400 MSE1600	2105 473223	3793 852701	188.40 42354	430	615.95 24.250	115.90 4.563	200.00 7.874
420	17	MSM420 MSE1700	2324 522456	4164 936105	202.00 45411	400	647.70 25.500	119.10 4.689	200.00 7.874
440	18	MSM440 MSE1800	2215 497952	4183 940376	216.00 48559	380	666.75 26.250	115.90 4.563	200.00 7.874
460		MSM460							
480	19	MSM480 MSE1900	2445 549658	4594 1032773	230.00 51706	360	698.50 27.500	119.10 4.689	223.00 8.780
500	20	MSM500 MSE2000	2453 551456	4923 1106734	244.00 54853	340	717.55 28.250	115.90 4.563	226.00 8.898
530	21	MSM530 MSE2100	2702 607434	5415 1217340	258.00 58001	330	762.00 30.000	119.10 4.689	229.00 9.016
560	22	MSM560 MSE2200	2851 640930	5740 1290403	272.00 61148	310	793.75 31.250	122.20 4.811	233.00 9.173
580	23	MSM580 MSE2300	2982 670380	6137 1387740	286.00 64295	300	812.80 32.000	119.10 4.689	232.00 9.134
600	24	MSM600 MSE2400	2972 668132	6185 1390443	300.00 67443	290	838.20 33.000	119.10 4.689	214.00 8.425

Housing Reference				
Add HR for retained Add HX for expansion e.g. MSM380HR	G	F	L	L ₁
MSM380 MSE1500	647.70 25.500	146 5.7	305 12.0	-
MSM400 MSE1600	685.80 27.000	146 5.7	324 12.8	-
MSM420 MSE1700	717.60 28.252	146 5.7	350 13.8	-
MSM440 MSE1800	733.40 28.874	146 5.7	350 13.8	-
MSM460 MSE1900	762.00 30.000	146 5.7	368 14.5	-
MSM500 MSE2000	787.40 31.000	146 5.7	368 14.5	-
MSM530 MSE2100	831.90 32.752	150 5.9	368 14.5	-
MSM560 MSE2200	866.80 34.126	152 6.0	374 14.7	-
MSM580 MSE2300	883.00 34.764	152 6.0	374 14.7	-
MSM600 MSE2400	914.40 36.000	152 6.0	388 15.3	-

Medium Series Support

S41 - S50

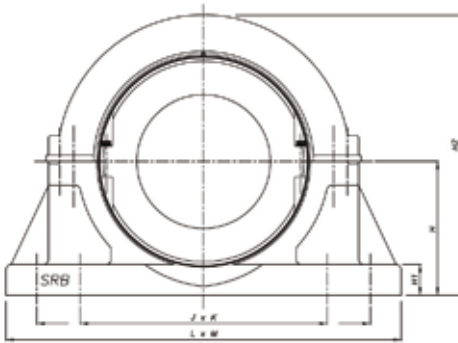

S41 - S50

Shaft (d) mm	inch	Support Reference	H	H ₁	H ₂	J x K	L x M	Bolts
380	15	S41	464 18.268	67 2.6	925 36.4	886 & 682 x 280 34.9 & 26.9 x 11	1092 x 368 43 x 14.5	8 x M36
400	16	S42	495 19.488	70 2.8	990 39.0	934 & 730 x 280 36.8 & 28.7 x 11	1168 x 368 46 x 14.5	8 x M36
420	17	S43	514 20.236	70 2.8	1030 40.6	972 & 768 x 280 38.3 & 30.2 x 11	1194 x 368 47 x 14.5	8 x M36
440	18	S44	533 20.984	73 2.9	1070 42.1	996 & 788 x 280 39.2 & 31 x 11	1244 x 368 49 x 14.5	8 x M36
460	19	S45	552 21.732	76 3.0	1110 43.7	1042 & 812 x 280 41 & 32 x 11	1270 x 368 50 x 14.5	8 x M36
500	20	S46	572 22.520	80 3.1	1145 45.1	1074 & 844 x 280 42.3 & 33.2 x 11	1296 x 368 51 x 14.5	8 x M36
530	21	S47	594 23.386	83 3.3	1180 46.5	1118 & 890 x 280 44 & 35 x 11	1398 x 368 55 x 14.5	8 x M36
560	22	S48	616 24.252	86 3.4	1230 48.4	1158 & 930 x 280 45.6 & 36.6 x 11	1422 x 382 56 x 15	8 x M42
580	23	S49	635 25.000	89 3.5	1270 50.0	1187 & 959 x 280 46.7 & 37.8 x 11	1448 x 382 57 x 15	8 x M42
600	24	S50	673 26.496	92 3.6	1345 53.0	1238 & 1010 x 280 48.7 & 39.8 x 11	1524 x 382 60 x 15	8 x M42

Flange Units

When faced with flat horizontal or vertical faces, flange units offer a simple mounting solution.


As with Pillow block supports, Flange units are produced with spherical location to accommodate standard bearing housings and provide easy initial alignment of shaft and equipment.

To facilitate positive location of the flange to the surface, the rear face is recessed (dimensions N & V). This allows for a spigot (Tolerance f8) to be located into the flange.

Bearing inspection is simply a matter of removing the top half of the flange and housing. Bearing replacement may also be achieved in the same manner if required.

When integrating flange units into new applications, it should be noted that a maximum radial load equivalent to $0.26C_{or}$ is permissible. A maximum axial load of $0.25C_s$ must also be taken into account for applications with thrust loading. Units for vertically oriented shafts may also need special consideration given to sealing arrangements.

As always, SRB Technical Services will be happy to advise on any application issues.

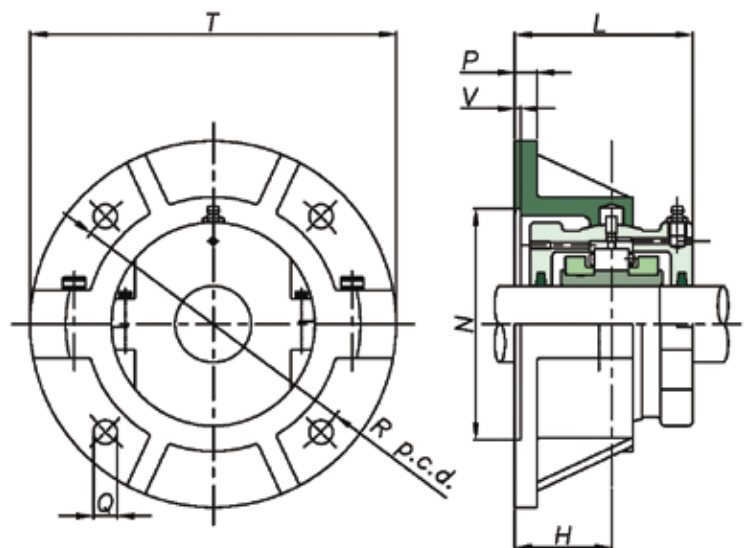

Medium Series Support

50mm to 300mm Flanges

Medium Series 50mm to 300mm Flanges



Shaft (d) mm	inch	Flange Reference	T	Bolts	R	P	H	N	V	L
45	1 ¹¹ / ₁₆	F03	260	4 x M12	218	16	67	166.9	3	124
50	1 ³ / ₄		10.2		8.6	0.6	2.6	6.571	0.1	4.9
	2									
55	2 ³ / ₁₆	F04	286	4 x M12	242	16	73	192.09	3	136
60	2 ⁷ / ₁₆		11.3		9.5	0.6	2.9	7.563	0.1	5.4
65	2 ¹ / ₂									
70	2 ¹¹ / ₁₆	F05	330	4 x M16	274	19	79	215.9	3	150
75	2 ³ / ₄		13.0		10.8	0.7	3.1	8.500	0.1	5.9
	3									
80	3 ³ / ₁₆	F06	356	4 x M16	302	19	86	244.47	3	164
85	3 ⁷ / ₁₆		14.0		11.9	0.7	3.4	9.625	0.1	6.5
90	3 ¹ / ₂									
100	3 ¹¹ / ₁₆	F07	382	4 x M16	334	22	92	276.22	3	166
105	3 ³ / ₄		15.0		13.1	0.9	3.6	10.875	0.1	6.5
	4									
110	4 ³ / ₁₆	F08	432	4 x M24	374	22	98	314.32	3	180
115	4 ⁷ / ₁₆		17.0		14.7	0.9	3.9	12.375	0.1	7.1
	4 ¹ / ₂									
120	4 ¹¹ / ₁₆	F10	470	4 x M24	412	25	114	346.07	3	206
125	4 ³ / ₄		18.5		16.2	1.0	4.5	13.625	0.1	8.1
130	4 ¹⁵ / ₁₆									
	5									
135	5 ³ / ₁₆	F30	508	4 x M24	444	25	114	377.82	3	208
140	5 ⁷ / ₁₆		20.0		17.5	1.0	4.5	14.875	0.1	8.2
	5 ¹ / ₂									
150	5 ¹¹ / ₁₆	F31	534	4 x M24	466	25	124	393.70	3	226
155	5 ³ / ₄		21.0		18.3	1.0	4.9	15.500	0.1	8.9
160A	5 ¹⁵ / ₁₆									
	6									
160	6 ⁷ / ₁₆	F32	584	4 x M30	508	29	124	428.62	5	240
170	6 ¹ / ₂		23.0		20.0	1.1	4.9	16.875	0.2	9.4
175	6 ¹¹ / ₁₆	F33	596	4 x M30	524	32	130	444.50	5	252
180	6 ³ / ₄		23.5		20.6	1.3	5.1	17.500	0.2	9.9
	6 ¹⁵ / ₁₆									
	7									
190	7 ¹ / ₄	F34	648	4 x M30	572	32	137	492.12	5	266
200	7 ¹ / ₂		25.5		22.5	1.3	5.4	19.375	0.2	10.5
	7 ¹⁵ / ₁₆									
	8									
220	8 ¹ / ₂	F35	712	4 x M36	620	35	146	527.05	5	284
230	8 ⁷ / ₈		28.0		24.4	1.4	5.7	20.750	0.2	11.2
	9									
240	9 ¹ / ₂	F36	736	4 x M36	660	38	149	568.32	5	290
250	9 ³ / ₄		29.0		26.0	1.5	5.9	22.375	0.2	11.4
260	10									
270	10 ¹ / ₂	F37	762	8 x M30	682	38	159	603.25	5	310
280	10 ³ / ₄		30.0		26.9	1.5	6.3	23.750	0.2	12.2
	11									
300	11 ¹ / ₂	F38	788	8 x M30	708	41	162	628.65	5	316
305	12		31.0		27.9	1.6	6.4	24.750	0.2	12.4

For Bearings and Housings see pages 35 – 40

Tensioning Units

This type of split unit can be found in use on materials handling equipment in many industries. Take up units provide an efficient and readily accessible means of tensioning conveyor systems and large scale drives.

The units consist of either push type or pull type sliding supports into which standard housings and bearings may be mounted. When integrating tensioning units into new applications, it should be noted that a maximum radial load equivalent to $0.3C_{or}$ is permissible. As with all SRB Units, a wide variety of sealing solutions may be applied dependant on the environment and application. Please contact SRB Technical Services for assistance.

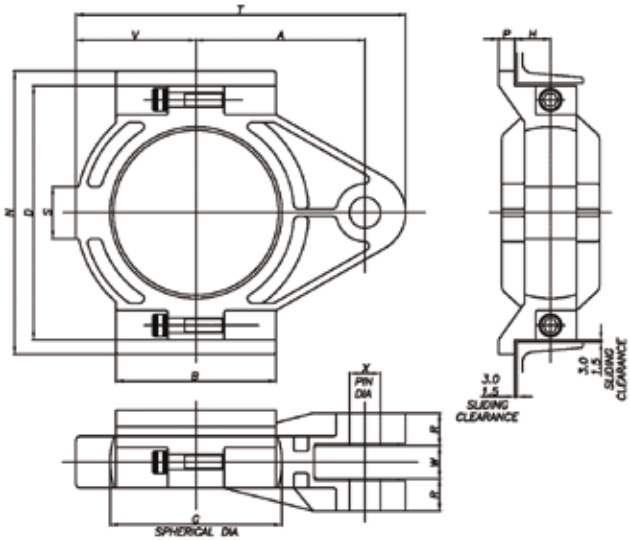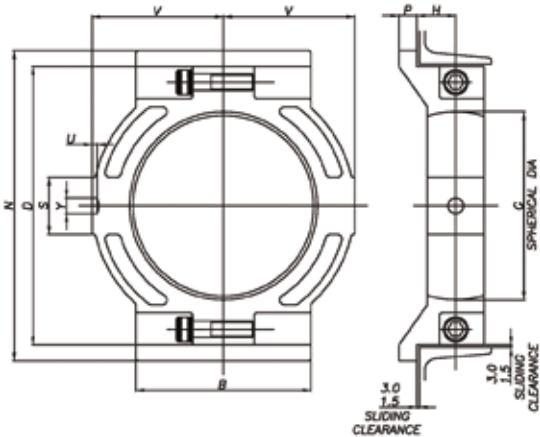

Tensioning Units TT/TP

Medium Series 50mm to 150mm Support


Shaft (d)		Support Reference														
mm	inch	Tension Type	Push Type	B	N	D	V	P	H	L	S	A	T	X	W	R
45	$1\frac{11}{16}$	TT03	TP03	128	235	203	102	20	32	108	38	146	280	24	30	29
50	$1\frac{15}{16}$ 2			5.0	9.3	8.0	4.0	0.8	1.3	4.3	1.5	5.7	11.0	0.9	1.2	1.1
55	$2\frac{3}{16}$	TT04	TP04	152	266	229	114	22	40	124	41	158	305	24	30	114
60	$2\frac{7}{16}$			6.0	10.5	9.0	4.5	0.9	1.6	4.9	1.6	6.2	12.0	0.9	1.2	4.5
65	$2\frac{1}{2}$															
70	$2\frac{11}{16}$	TT05	TP05	190	318	280	140	22	40	131	51	190	368	30	38	35
75	$2\frac{15}{16}$ 3			7.5	12.5	11.0	5.5	0.9	1.6	5.2	2.0	7.5	14.5	1.2	1.5	1.4
80	$3\frac{3}{16}$	TT06	TP06	204	342	305	152	22	43	141	51	210	414	36	44	35
85	$3\frac{7}{16}$			8.0	13.5	12.0	6.0	0.9	1.7	5.6	2.0	8.3	16.3	1.4	1.7	1.4
90	$3\frac{1}{2}$															
100	$3\frac{11}{16}$	TT07	TP07	216	382	343	162	22	48	142	70	228	445	42	44	41
105	$3\frac{15}{16}$ 4			8.5	15.0	13.5	6.4	0.9	1.9	5.6	2.8	9.0	17.5	1.7	1.7	1.6
110	$4\frac{3}{16}$	TT08	TP08	254	420	381	190	25	51	156	76	260	508	42	44	44
115	$4\frac{7}{16}$			10.0	16.5	15.0	7.5	1.0	2.0	6.1	3.0	10.2	20.0	1.7	1.7	1.7
	$4\frac{1}{2}$															
120	$4\frac{11}{16}$	TT10	TP10	266	464	426	204	25	57	173	86	280	546	48	50	51
125	$4\frac{3}{4}$			10.5	18.3	16.8	8.0	1.0	2.2	6.8	3.4	11.0	21.5	1.9	2.0	2.0
130	$4\frac{15}{16}$ 5															
135	$5\frac{3}{16}$	TT30	TP30	280	502	464	222	25	60	178	92	298	584	48	50	54
140	$5\frac{1}{4}$			11.0	19.8	18.3	8.7	1.0	2.4	7.0	3.6	11.7	23.0	1.9	2.0	2.1
	$5\frac{7}{16}$ $5\frac{1}{2}$															
150	$5\frac{11}{16}$	TT31	TP31	305	528	489	235	25	64	190	92	312	616	48	50	57
155	$5\frac{3}{4}$			12.0	20.8	19.3	9.3	1.0	2.5	7.5	3.6	12.3	24.3	1.9	2.0	2.2
160A	$5\frac{15}{16}$ 6															





Heavy Series

Heavy Series bearing products offer solutions to the most demanding of load conditions. Bearings are supported by robust and durable mountings and can be equipped with a variety of sealing solutions. If a standard catalogue product does not meet your requirements, SRB Technical Services will be happy to provide help and advice on your application.

Bearings, Housings & Supports	100mm to 260mm	Page	47 – 48
	280mm to 600mm	Page	49 – 50
Flange Units		Page	51

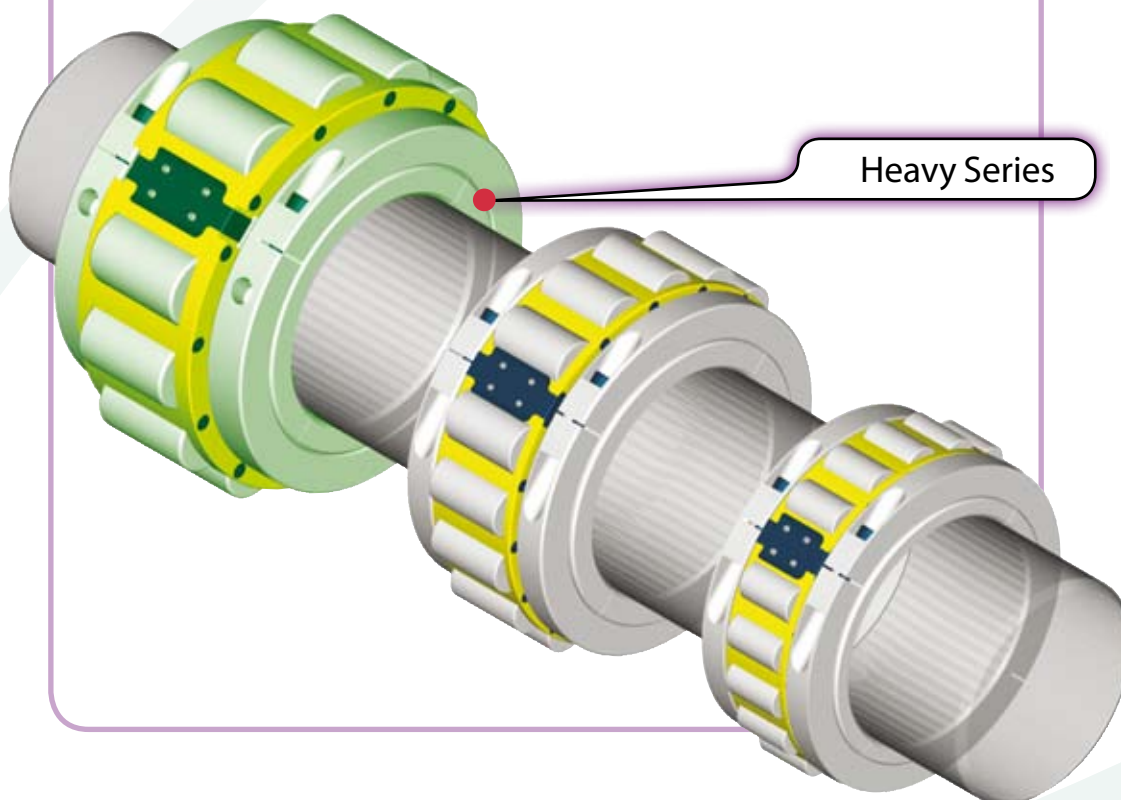


Heavy Series Bearing & Housing
100mm to 260mm

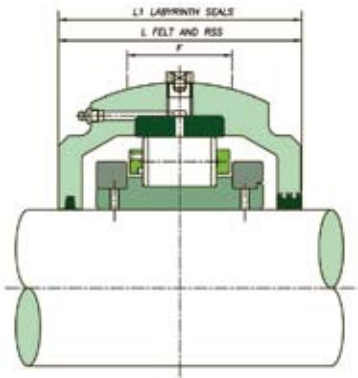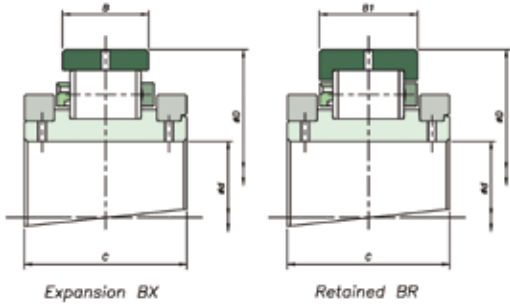

Shaft (d)		Reference		Bearings Ratings							Housing Reference						
mm	inch	Add BR for retained Add BX for expansion e.g. HSM100BR		Dynamic C _r (kN/lb)	Static C _{0r} (kN/lb)	Axial C _a (kN/lb)	Max RPM	D	B B ₁	C	Add HR for retained Add HX for expansion e.g. HSM100HR		G	F	L	L ₁	
100	3 ¹¹ / ₁₆	HSM100	HSE311								HSM100	HSE311					
105	3 ³ / ₄	HSM105	HSE312	653	783	31.20	1820	254.00	84.20	136.00	HSM105	HSE312	308.00	95	200	206	
	3 ¹⁵ / ₁₆		HSE315	146800	176025	7014		10.000	3.315	5.354		HSE315	12.126	3.7	7.9	8.1	
	4		HSE400									HSE400					
110	4 ³ / ₁₆	HSM110	HSE403								HSM110	HSE403					
115	4 ¹ / ₄	HSM115	HSE404	656	801	39.10	1640	266.70	87.30	147.00	HSM115	HSE404	323.85	102	210	222	
120	4 ⁷ / ₁₆	HSM120	HSE407	147475	180072	8790		10.500	3.437	5.787	HSM120	HSE407	12.750	4.0	8.3	8.7	
	4 ¹ / ₂		HSE408									HSE408					
125	4 ¹⁵ / ₁₆	HSM125	HSE415	753	974	49.00	1500	279.40	73.10	140.00	HSM125	HSE415	323.85	102	214	222	
130	5	HSM130	HSE500	169281	218964	11016		11.000	84.20	5.512	HSM130	HSE500	12.750	4.0	8.4	8.7	
									3.315								
135	5 ³ / ₁₆	HSM135	HSE503						79.40		HSM135	HSE503					
140	5 ¹ / ₄	HSM140	HSE504	928	1265	58.80	1340	304.80	3.126	147.00	HSM140	HSE504	355.60	108	216	230	
	5 ¹ / ₈		HSE507	208623	284383	13219		12.000	90.50	5.787		HSE507	14.000	4.3	8.5	9.1	
	5 ¹ / ₂		HSE508						3.563			HSE508					
150	5 ¹¹ / ₁₆	HSM150	HSE511						81.00		HSM150	HSE511					
155	5 ³ / ₄	HSM155	HSE512	1037	1325	69.40	1220	330.20	3.189	160.00	HSM155	HSE512	393.70	114	232	254	
	5 ¹⁵ / ₁₆		HSE515	233127	297872	15602		13.000	96.90	6.299		HSE515	15.500	4.5	9.1	10.0	
	6		HSE600						3.815			HSE600					
160	6 ¹ / ₁₆	HSM160	HSE607	1196	1576	79.20	1110	355.60	103.20	171.00	HSM160	HSE607	422.30	120	244	268	
170	6 ¹ / ₂	HSM170	HSE608	268871	354299	17805		14.000	4.063	6.732	HSM170	HSE608	16.626	4.7	9.6	10.6	
	6 ¹¹ / ₁₆		HSE611									HSE611					
175	6 ³ / ₄	HSM175	HSE612	1330	1867	89.00	1030	374.65	92.10	178.00	HSM175	HSE612	431.80	132	254	284	
180	6 ¹⁵ / ₁₆	HSM180	HSE615	298996	419718	20008		14.750	3.626	7.008	HSM180	HSE615	17.000	5.2	10.0	11.2	
	7		HSE700						108.80			HSE700					
									4.283								
190	7 ¹ / ₄	HSM190	HSE704	1597	2285	99.60	880	419.10	97.70	191.00	HSM190	HSE704	489.00	146	270	300	
200	7 ¹ / ₂	HSM200	HSE708	359020	513688	22391		16.500	3.846	7.520	HSM200	HSE708	19.252	5.7	10.6	11.8	
	7 ¹⁵ / ₁₆		HSE715						118.30			HSE715					
	8		HSE800						4.657			HSE800					
220	8 ¹ / ₂	HSM220	HSE808	1665	2455	109.40	760	469.90	109.60	212.00	HSM220	HSE808	546.10	165	298	334	
230	8 ³ / ₈	HSM230	HSE814	374307	551906	24594		18.500	4.315	8.346	HSM230	HSE814	21.500	6.5	11.7	13.1	
	9		HSE900						5.189			HSE900					
240	9 ¹ / ₂	HSM240	HSE908	1896	2789	130.80	700	482.60	105.60	211.00	HSM240	HSE908	558.80	165	298	334	
260	9 ³ / ₄	HSM260	HSE912	426238	626992	29405		19.000	4.157	8.307	HSM260	HSE912	22.000	6.5	11.7	13.1	
	10		HSE1000						124.60			HSE1000					
									4.906								

Heavy Series Support


S54 - S63

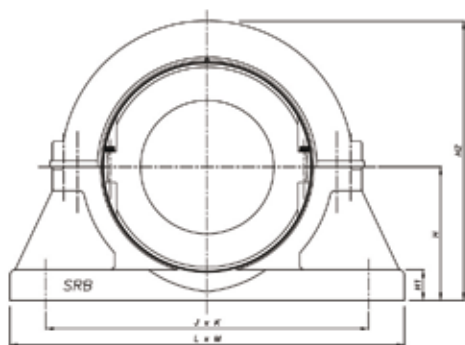

S54 - S63

mm	Shaft (d) inch	Support Reference	H	H ₁	H ₂	J x K	L x M	Bolts
100	3 ¹¹ / ₁₆	S54	191	38	405	438 x 82	514 x 152	4 x M24
105	3 ⁷ / ₄		7.520	1.5	15.9	17.2 x 3.2	20.2 x 6	
	4							
110	4 ³ / ₁₆	S55	197	38	425	458 x 88	534 x 166	4 x M24
115	4 ¹ / ₄		7.756	1.5	16.7	18 x 3.5	21 x 6.5	
120	4 ⁷ / ₁₆							
	4 ¹ / ₂							
125	4 ¹⁵ / ₁₆	S56	203	48	435	470 x 96	546 x 166	4 x M24
130	5		7.992	1.9	17.1	18.5 x 3.8	21.5 x 6.5	
135	5 ³ / ₁₆	S57	229	54	485	514 x 102	622 x 178	4 x M30
140	5 ¹ / ₄		9.016	2.1	19.1	20.2 x 4	24.5 x 7	
	5 ⁷ / ₁₆							
	5 ¹ / ₂							
150	5 ¹¹ / ₁₆	S58	254	57	535	558 x 120	666 x 204	4 x M30
155	5 ³ / ₄		10.000	2.2	21.1	22 x 4.7	26.2 x 8	
	5 ¹⁵ / ₁₆							
	6							
160	6 ⁷ / ₁₆	S59	267	60	570	628 x 140	736 x 228	4 x M30
170	6 ¹ / ₂		10.512	2.4	22.4	24.7 x 5.5	29 x 9	
	6 ¹¹ / ₁₆							
175	6 ³ / ₄	S60	279	64	580	636 x 152	762 x 254	4 x M30
180	6 ¹⁵ / ₁₆		10.984	2.5	22.8	25 x 6	30 x 10	
	7							
	7 ¹ / ₄							
190	7 ¹ / ₂	S61	311	67	655	636 x 172	838 x 266	4 x M36
200	7 ¹⁵ / ₁₆		12.244	2.6	25.8	25 x 6.8	33 x 10.5	
	8							
220	8 ¹ / ₂	S62	349	76	730	736 x 178	952 x 280	4 x M42
230	8 ⁷ / ₈		13.740	3.0	28.7	29 x 7	37.5 x 11	
	9							
240	9 ¹ / ₂	S63	394	76	790	670 x 304	914 x 406	4 x M42
260	9 ³ / ₄		15.512	3.0	31.1	26.4 x 12	36 x 16	
	10							

Heavy Series Bearing & Housing
280mm to 600mm

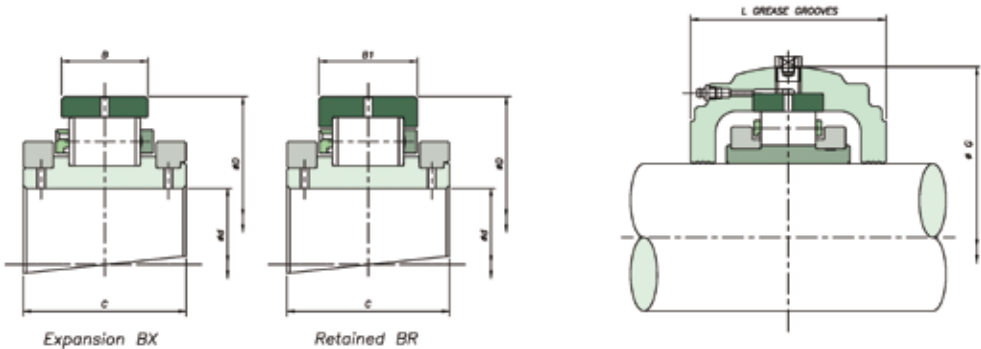


Shaft (d)		Reference		Bearings Ratings						
mm	inch	Add BR for retained Add BX for expansion e.g. HSM280BR		Dynamic C _r (kN/lb)	Static C _{0r} (kN/lb)	Axial C _a (kN/lb)	Max RPM	D	B	C
280	11	HSM280	HSE1100	2202 495029	3507 788405	153.00 34396	620	495.30 19.500	139.70 5.500	244.00 9.606
300	12	HSM300	HSE1200	2337 525379	3650 820553	174.40 39207	560	558.80 22.000	139.70 5.500	244.00 9.606
320	13	HSM320	HSE1300	2718 611031	4093 920143	198.80 44692	500	622.30 24.500	160.40 6.315	272.00 10.709
340	14	HSM340	HSE1400	2935	4973	213.60	460	615.95	158.00	279.00
360		HSM360		659814	1117975	48019		24.250	6.220	10.984
380	15	HSM380	HSE1500	3195	5238	250.80	420	685.80	166.70	292.00
400	16	HSM400	HSE1600	718265	1177550	56382		27.000	6.563	11.496
420	17	HSM420	HSE1700	3582	6377	275.80	360	700.00	160.00	284.00
440		HSM440		805266	1433607	62002		27.559	6.299	11.181
460	18	HSM460	HSE1800	3807	6611	302.40	340	740.00	170.00	294.00
				855848	1486212	67982		29.134	6.693	11.575
500	20	HSM500	HSE2000	4660	8183	347.00	310	850.90	187.40	300.00
530	21	HSM530	HSE2100	1047610	1839612	78009		33.500	7.378	11.811
560	22	HSM560	HSE2200	4795	9412	382.60	280	863.60	196.90	310.00
				1077959	2115902	86012		34.000	7.752	12.205
580	23	HSM580	HSE2300	4951	9451	400	270	890.00	184.00	310.00
600	24	HSM600	HSE2400	1113029	2124669	89924		35.039	7.244	12.205

Housing Reference					
Add HR for retained Add HX for expansion e.g. HSM280HR		G	F	L	L ₁
HSM280	HSE1100	571.50 22.500	165 6.5	356 14.0	356 14.0
HSM300	HSE1108	641.40	165	346	370
HSM305	HSE1200	25.252	6.5	13.6	14.6
HSM320	HSE1208	717.60	170	368	—
HSM330	HSE1300	28.252	6.7	14.5	—
HSM340	HSE1400	704.90	196	432	—
HSM350		27.752	7.7	17.0	—
HSM380	HSE1500	774.70	202	400	—
HSM400	HSE1600	30.500	8.0	15.7	—
HSM420	HSE1700	788.00	200	440	—
		31.024	7.9	17.3	—
HSM440	HSE1800	840.00	200	450	—
HSM460		33.071	7.9	17.7	—
HSM500	HSE2000	958.90	204	495	—
HSM530	HSE2100	37.752	8.0	19.5	—
HSM560	HSE2200	958.90	204	490	—
		37.752	8.0	19.3	—
HSM580	HSE2300	990.00	204	490	—
HSM600	HSE2400	38.976	8.0	19.3	—

Heavy Series Support

S83 - S95

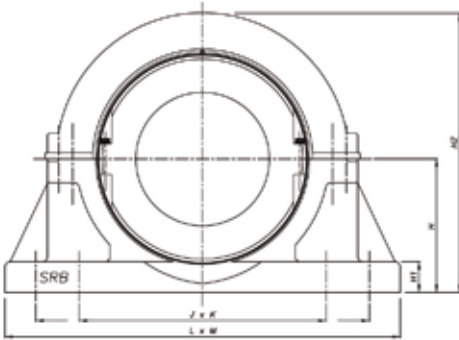

S83 - S95

Shaft (d)		Support Reference	H	H ₁	H ₂	J x K	L x M	Bolts
mm	inch							
280	11	S83	368 14.488	70 2.8	785 30.9	742 & 502 x 178 29.2 & 19.8 x 7	940 x 280 37 x 11	8 x M36
300	12	S65	457 17.992	76 3.0	915 36.0	876 & 674 x 330 34.5 & 26.5 x 13	1092 x 420 43 x 16.5	8 x M36
320	13	S66	518 20.394	80 3.1	1035 40.7	978 & 762 x 266 38.5 & 30 x 10.5	1194 x 356 47 x 14	8 x M36
340	14	S86	470	82	1000	928 & 660 x 190	1220 x 318	8 x M42
360			18.504	3.2	39.4	36.5 & 26 x 7.5	48 x 12.5	
380	15	S68	559	92	1120	1036 & 806 x 292	1270 x 394	8 x M42
400	16		22.008	3.6	44.1	40.8 & 31.7 x 11.5	50 x 15.5	
420	17	S89	508	90	1075	990 & 690 x 210	1270 x 360	8 x M48
440			20.000	3.5	42.3	39 & 27.2 x 8.3	50 x 14.2	
460	18	S90	550 21.654	95 3.7	1165 45.9	1080 & 780 x 220 42.5 & 30.7 x 8.7	1370 x 380 53.9 x 15	8 x M48
500	20	S94	622	102	1340	1270 & 940 x 242	1600 x 406	8 x M56
530	21		24.488	4.0	52.8	50 & 37 x 9.5	63 x 16	
560	22	S94	622 24.488	102 4.0	1340 52.8	1270 & 940 x 242 50 & 37 x 9.5	1600 x 406 63 x 16	8 x M56
580	23	S95	622	102	1340	1270 & 940 x 242	1600 x 406	8 x M56
600	24		24.488	4.0	52.8	50 & 37 x 9.5	63 x 16	

Flange Units


When faced with flat horizontal or vertical faces, flange units offer a simple mounting solution. As with Pillow block supports, Flange units are produced with spherical location to accommodate standard bearing housings and provide easy initial alignment of shaft and equipment.

To facilitate positive location of the flange to the surface, the rear face is recessed (dimensions N & V). This allows for a spigot (Tolerance f8) to be located into the flange.

Bearing inspection is simply a matter of removing the top half of the flange and housing. Bearing replacement may also be achieved in the same manner if required.

When integrating flange units into new applications, it should be noted that a maximum radial load equivalent to $0.26C_{or}$ is permissible. A maximum axial load of $0.25C_a$ must also be taken into account for applications with thrust loading. Units for vertically oriented shafts may also need special consideration given to sealing arrangements.

As always, SRB Technical Services will be happy to advise on any application issues.

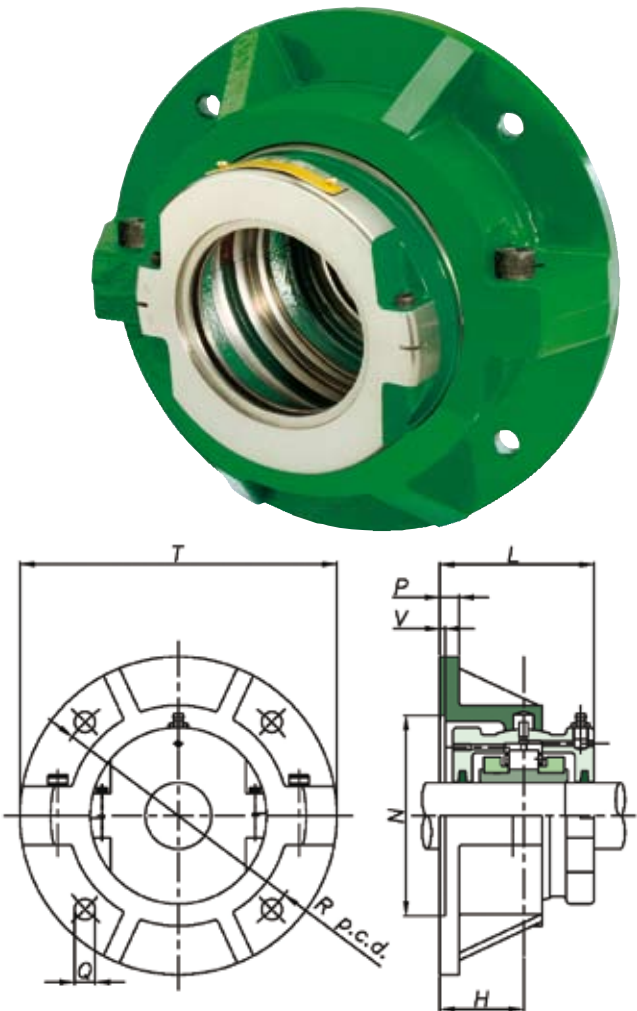


Flange Units										
Shaft (d)		Flange Reference	T	Bolts	R	P	H	N	V	L
mm	inch									
125	4 ¹⁵ / ₁₆	F56	530	4 x M24	460	34	122	390.45	7	233
130	5		20.9		18.1	1.3	4.8	15.372	0.3	9.2
150	5 ¹¹ / ₁₆	F58	648	4 x M24	574	44	137	495.35	7	264
155	5 ¹⁵ / ₁₆		25.5		22.6	1.7	5.4	19.502	0.3	10.4
	6									
175	6 ³ / ₄	F60	724	4 x M24	638	44	156	546.15	8	298
180	6 ¹⁵ / ₁₆		28.5		25.1	1.7	6.1	21.502	0.3	11.7
	7									
240	9 ¹ / ₂	F63	890	4 x M24	796	48	181	692.20	8	348
250	9 ³ / ₄		35.0		31.3	1.9	7.1	27.252	0.3	13.7
260	10									

Sealing Arrangements


Any bearing, housing and support unit that is not suitably sealed against its surrounding environment is unlikely to achieve its full potential, either in terms of performance or life span. The prevention of ingress of foreign materials and contaminants is of paramount importance and should be considered as early in the selection process as possible.

A wide variety of sealing solutions are available to users of SRB products as "off the shelf" arrangements. This range will cover the vast majority of operating environments found throughout all industries. To cover those situations where a proprietary arrangement is not suitable, SRB Technical Services are able to work closely with designers and end users to develop and manufacture bespoke solutions tailored to specific applications.

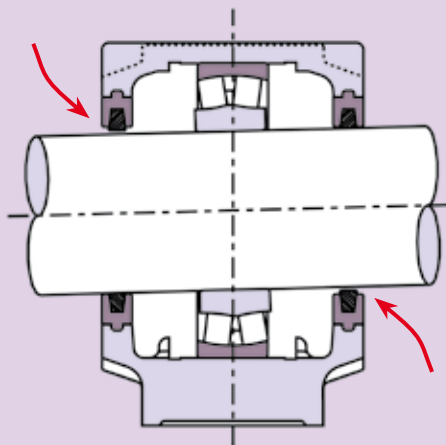

Seal ineffective


SRB units have inherent advantages over traditional solid bearing arrangements when considering sealing. The spherical location between housing and support ensures that whichever type of seal is used, it will always remain concentric to the shaft.

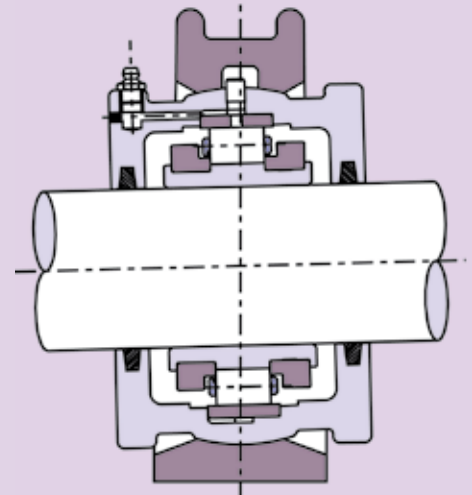

Seal remains concentric




Sealing Arrangements

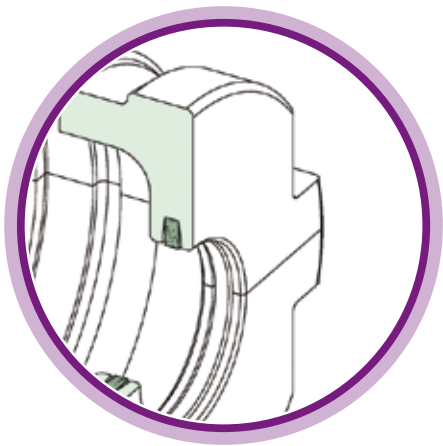

Felt Seal

This type of seal is supplied as standard with all SRB housings up to a bore size of 300mm. Consisting of felt strips made from blended fibres. Seals are supplied dry and need to be soaked in oil prior to fitting.


Max Speed	dN(mm) ≤150000
Temp Range	-60°C to +100°C
Shaft Finish	1.6µm Ra

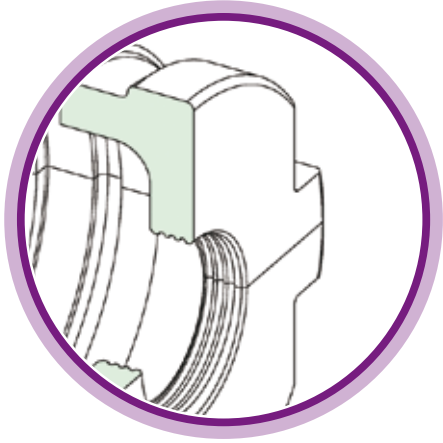

Labyrinth Grease Groove

For shaft sizes over 300mm, housings are supplied with a close fitting labyrinth groove machined into the housing. No additional seal is added. For harsh environments, alternative sealing arrangements are available.


Max Speed	As Bearing
Temp Range	As Bearing
Shaft Finish	3.2µm Ra

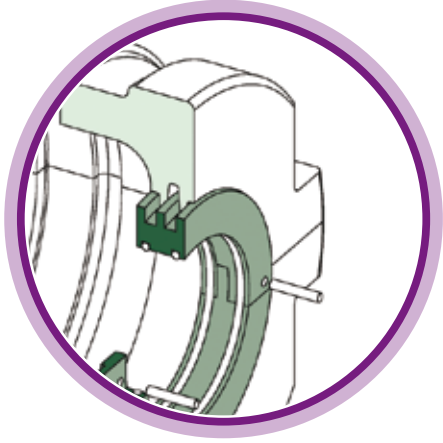

Aluminium Triple Labyrinth

A precision machined, non-contacting seal suitable for both high speed and general applications. Once fitted the seal revolves with the shaft. The seal grips the shaft via two split O-rings fitted to the bore of the seal. SRB Triple Labyrinth seals are fitted with high temperature Viton cord as standard.


Max Speed	As Bearing
Temp Range	-20°C to +175°C
Shaft Finish	3.2µm Ra
Suffix Letters	ATL

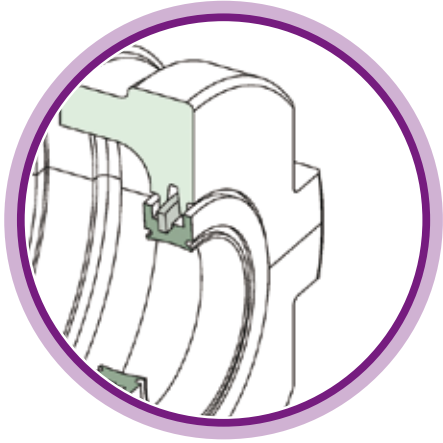

Neoprene Triple Labyrinth

The seal is moulded from Neoprene rubber and incorporates a steel centre band. This steel pressing has ends which form an interlocking arrangement and hence secure the seal to the shaft. The seal can be used where restrictions prevent the use of Aluminium (e.g. Mining).


Max Speed	dN(mm) ≤150000
Temp Range	-20°C to +100°C
Shaft Finish	3.2µm Ra
Suffix Letters	NTL

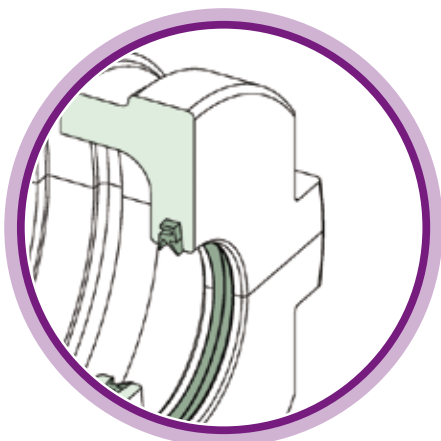

Nitrile Single Lip

For environments involving moderate liquid splashing but not submersion. Should be avoided where abrasive particles are also present as this can lead to shaft wear in the seal area. High temperature versions are also available.


Max Speed	dN(mm) ≤ 150000
Temp Range	-20°C to +100°C
Shaft Finish	3.2µm Ra
Suffix Letters	RSS (RSSHT for high temperature)

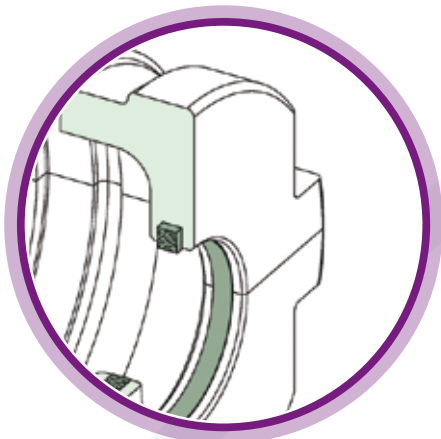

High Temperature Packing

A self-lubricating seal based around PTFE and graphite. In order to utilise the highest quality materials available, SRB housings for high temperature applications are machined to suit the High Temperature Packing used.


Max Speed	dN(mm) ≤ 150000
Temp Range	-60°C to +300°C
Shaft Finish	1.2µm Ra
Suffix Letters	HTPS

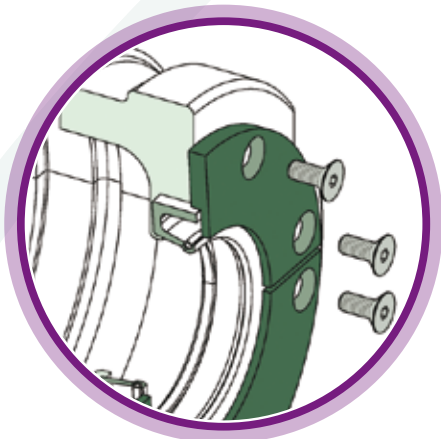

Single Lip with Garter Spring and Retaining Plate

A more specialised seal for very wet environments with heavy splash. This type of seal is NOT suitable for continuous submersion without due consideration being given to sealing of the housing joint and any other possible points of liquid entry. Please consult SRB Technical Services for more information.

Max Speed	dN(mm) ≤ 150000
Temp Range	-20°C to +100°C
Shaft Finish	0.8µm Ra
Suffix Letters	WSRP

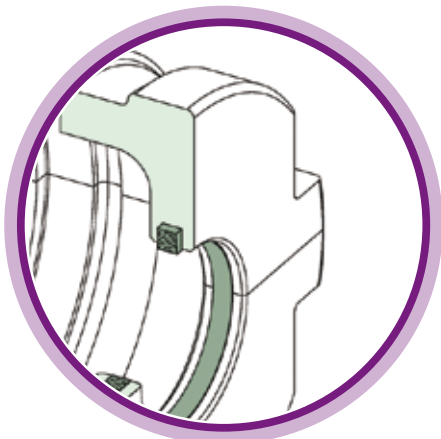

Kevlar Packing Seal

This recent addition to the sealing range has proved highly effective in areas having the potential for fine particle contaminants such as cement or ash. Please consult SRB technical services for more information.

Max Speed	As bearing
Temp Range	-100°C to +280°C
Shaft Finish	1.6µm Ra
Suffix Letters	KPS

Triple Labyrinth Housing and Seal References

Light Series					Medium Series					Heavy Series				
Shaft (d)		Triple Labyrinth Seal Reference		Housing Reference	Shaft (d)		Triple Labyrinth Seal Reference		Housing Reference	Shaft (d)		Triple Labyrinth Seal Reference		Housing Reference
mm	inch	mm	inch	Retained Expansion	mm	inch	mm	inch	Retained Expansion	mm	inch	mm	inch	Retained Expansion
35	1 ³ / ₁₆	35MMATL	103ATL	LS1HRTL										
40	1 ¹ / ₄	40MMATL	104ATL	LS1HXTL										
	1 ⁷ / ₁₆		107ATL											
	1 ¹ / ₂		108ATL											
45	1 ¹¹ / ₁₆	45MMATL	111ATL	LS2HRTL	45	1 ¹¹ / ₁₆	45MMATL	111ATL	MS3HRTL					
50	1 ³ / ₄	50MMATL	112ATL	LS2HXTL	50	1 ³ / ₄	50MMATL	112ATL	MS3HXTL					
	1 ⁵ / ₁₆		115ATL			1 ⁵ / ₁₆		115ATL						
	2		200ATL			2		200ATL						
55	2 ³ / ₁₆	55MMATL	203ATL	LS3HRTL	55	2 ³ / ₁₆	55MMATL	203ATL	MS4HRTL					
60	2 ¹ / ₄	60MMATL	204ATL	LS3HXTL	60	2 ¹ / ₄	60MMATL	204ATL	MS4HXTL					
65	2 ⁷ / ₁₆	65MMATL	207ATL		65	2 ⁷ / ₁₆	65MMATL	207ATL						
	2 ¹ / ₂		208ATL			2 ¹ / ₂		208ATL						
70	2 ¹¹ / ₁₆	70MMATL	211ATL	LS4HRTL	70	2 ¹¹ / ₁₆	70MMATL	211ATL	MS5HRTL					
75	2 ³ / ₄	75MMATL	212ATL	LS4HXTL	75	2 ³ / ₄	75MMATL	212ATL	MS5HXTL					
	2 ⁵ / ₁₆		215ATL			2 ⁵ / ₁₆		215ATL						
	3		300ATL			3		300ATL						
80	3 ³ / ₁₆	80MMATL	303ATL	LS5HRTL	80	3 ³ / ₁₆	80MMATL	303ATL	MS6HRTL					
85	3 ¹ / ₄	85MMATL	304ATL	LS5HXTL	85	3 ¹ / ₄	85MMATL	304ATL	MS6HXTL					
90	3 ⁷ / ₁₆	90MMATL	307ATL		90	3 ⁷ / ₁₆	90MMATL	307ATL						
	3 ¹ / ₂		308ATL			3 ¹ / ₂		308ATL						
100	3 ¹¹ / ₁₆	100MMATL	311ATL	LS6HRTL	100	3 ¹¹ / ₁₆	100MMATL	311ATL	MS7HRTL					
	3 ³ / ₄	100MMATL	312ATL	LS6HXTL		3 ³ / ₄	100MMATL	312ATL	MS7HXTL					
105	3 ¹⁵ / ₁₆	105MMATL	315ATL		105	3 ¹⁵ / ₁₆	105MMATL	315ATL						
	4		400ATL			4		400ATL						
110	4 ³ / ₁₆	110MMATL	403ATL	LS7HRTL	110	4 ³ / ₁₆	110MMATL	403ATL	MS8HRTL					
	4 ¹ / ₄	110MMATL	404ATL	LS7HXTL		4 ¹ / ₄	110MMATL	404ATL	MS8HXTL					
115	4 ⁷ / ₁₆	115MMATL	407ATL		115	4 ⁷ / ₁₆	115MMATL	407ATL						
	4 ¹ / ₂		408ATL			4 ¹ / ₂		408ATL						
120	4 ¹¹ / ₁₆	120MMATL	411ATL	LS8HRTL	120	4 ¹¹ / ₁₆	120MMATL	411ATL	MS10HRTL					
125	4 ¹ / ₄	125MMATL	412ATL	LS8HXTL	125	4 ¹ / ₄	125MMATL	412ATL	MS10HXTL					
130	4 ¹⁵ / ₁₆	130MMATL	415ATL		130	4 ¹⁵ / ₁₆	130MMATL	415ATL						
	5		500ATL			5		500ATL						
135	5 ³ / ₁₆	135MMATL	503ATL	LS9HRTL	135	5 ³ / ₁₆	135MMATL	503ATL	MS30HRTL					
	5 ¹ / ₄	135MMATL	504ATL	LS9HXTL		5 ¹ / ₄	135MMATL	504ATL	MS30HXTL					
140	5 ⁷ / ₁₆	140MMATL	507ATL		140	5 ⁷ / ₁₆	140MMATL	507ATL						
	5 ¹ / ₂		508ATL			5 ¹ / ₂		508ATL						
150	5 ¹¹ / ₁₆	150MMATL	511ATL	LS10HRTL	150	5 ¹¹ / ₁₆	150MMATL	511ATL	MS31HRTL					
	5 ³ / ₄	150MMATL	512ATL	LS10HXTL		5 ³ / ₄	150MMATL	512ATL	MS31HXTL					
155	5 ¹⁵ / ₁₆	155MMATL	515ATL		155	5 ¹⁵ / ₁₆	155MMATL	515ATL						
	6		600ATL			6		600ATL						
160	6 ⁷ / ₁₆	160MMATL	607ATL	LS11HRTL	160	6 ⁷ / ₁₆	160MMATL	607ATL	MS32HRTL					
	6 ¹ / ₂		608ATL	LS11HXTL		6 ¹ / ₂		608ATL	MS32HXTL					
170	6 ¹¹ / ₁₆	170MMATL	611ATL	LS12HRTL	170	6 ¹¹ / ₁₆	170MMATL	611ATL	MS33HRTL					
	6 ³ / ₄	170MMATL	612ATL	LS12HXTL		6 ³ / ₄		612ATL	MS33HXTL					
175	6 ¹⁵ / ₁₆	175MMATL	615ATL		175	6 ¹⁵ / ₁₆	175MMATL	615ATL						
180	7	180MMATL	700ATL		180	7	180MMATL	700ATL						
190	7 ¹ / ₄	190MMATL	704ATL	LS13HRTL	190	7 ¹ / ₄	190MMATL	704ATL	MS34HRTL					
	7 ¹ / ₂	190MMATL	708ATL	LS13HXTL		7 ¹ / ₂	190MMATL	708ATL	MS34HXTL					
200	7 ¹⁵ / ₁₆	200MMATL	715ATL		200	7 ¹⁵ / ₁₆	200MMATL	715ATL						
	8		800ATL			8		800ATL						
220	8 ¹ / ₂	220MMATL	808ATL	LS14HRTL	220	8 ¹ / ₂	220MMATL	808ATL	MS35HRTL					
	8 ⁷ / ₈	220MMATL	814ATL	LS14HXTL		8 ⁷ / ₈	220MMATL	814ATL	MS35HXTL					
230	9	230MMATL	900ATL		230	9	230MMATL	900ATL						
240	9 ¹ / ₂	240MMATL	908ATL	LS15HRTL	240	9 ¹ / ₂	240MMATL	908ATL	MS36HRTL					
	9 ³ / ₄	240MMATL	912ATL	LS15HXTL		9 ³ / ₄	240MMATL	912ATL	MS36HXTL					
250	10	250MMATL	1000ATL		250	10	250MMATL	1000ATL						
260	10 ¹ / ₂	260MMATL	1008ATL	LS16HRTL	260	10 ¹ / ₂	260MMATL	1008ATL	MS37HRTL					
	10 ³ / ₄	260MMATL	1012ATL	LS16HXTL		10 ³ / ₄	260MMATL	1012ATL	MS37HXTL					
270	11	270MMATL	1100ATL		270	11	270MMATL	1100ATL						
280		280MMATL			280		280MMATL							
300	11 ¹ / ₂	300MMATL	1108ATL	LS17HRTL	300	11 ¹ / ₂	300MMATL	1108ATL	MS38HRTL					
		305MMATL	1200ATL	LS17HXTL			305MMATL	1200ATL	MS38HXTL					
305	12				305	12								

The most popular sealing solution for split roller bearings after the standard felt seal is the Triple Labyrinth.

This non contacting seal offers resistance to contaminant ingress at speeds greater than can be accommodated by other seal types (see page 53).

SN/SD Bearings

The New compact Split Plummer Block Bearing from SRB is the first split cylindrical roller bearing assembly to be interchangeable with standard SN and SD series plummer blocks, bringing the benefits of a split design to a much wider audience.




Split roller bearings offer dramatically reduced downtime in maintenance and replacement situations, but could not previously be used in many bearing applications because of their dimensional incompatibility with standard plummer block sizes.

Cast iron plummer blocks accommodating adaptor sleeve mounted spherical roller bearings are amongst the most common types in use, supporting rotating shafts in everything from conveyors and fans to line shafts. Yet their replacement is often time consuming and difficult due to the removal of adjacent equipment. Replacing a typical bearing mounted in a cast iron plummer block can take anything from 6 hours to several days, in contrast, it can take as little as 1–2 hours to replace an SRB bearing unit.

Key benefits of the Split Plummer Block are:

- SRB SN & SD Series supports dimensionally interchangeable with the SN5.. and SD31.. range of plummer blocks.
- Significant reductions in the time required to change trapped bearings.
- Savings in downtime, improved machine availability.
- Simplified mounting procedures, no feeler gauges.
- Improved sealing efficiency, seals remain concentric to the shaft, unlike spherical roller bearings.
- Efficient use of Maintenance Engineering resources.
- Improved reliability, able to accommodate thermal expansion of the shaft within the bearing envelope.


Light SN/SD Range

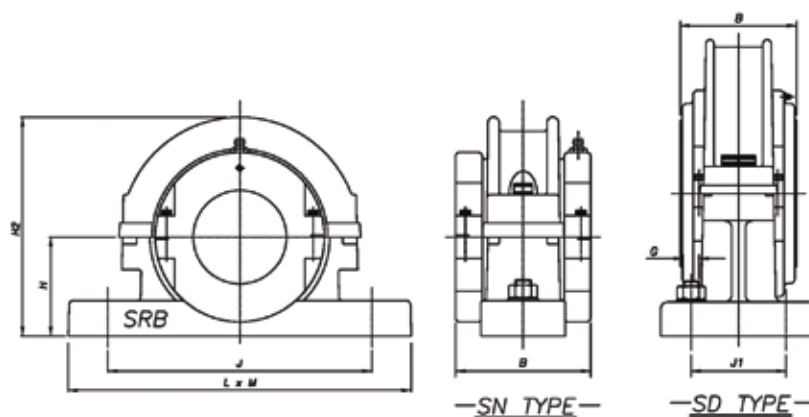

SN SD


Shaft (d) mm	SRB Reference	SN/SD Reference	H	H ₁	H ₂	J x K	L x M	G
35	SN01	SN 508	60	135	84	170	205 x 60	12
40		SN 509						
50	SN02	SN 511	70	155	96	210	255 x 70	16
60	SN03	SN 513	80	180	102	234	275 x 70	16
65	SN03A	SN 515	80	180	102	234	280 x 70	16
70	SN04	SN 516	95	208	112	260	315 x 90	20
75		SN 517						
80	SN05	SN 518	100	230	134	290	345 x 100	20
85	SN05A	SN 519	112	242	134	290	345 x 100	20
90	SN05B	SN 520	112	242	134	320	380 x 110	24
100	SN06	SN 522	125	265	132	350	410 x 120	24
110	SN07	SN 524	140	300	140	350	410 x 120	24
115	SN07A	SN 526	150	310	140	380	445 x 130	24
125	SN08	SN 528	150	354	154	420	500 x 150	30
135	SN09	SN 530	160	369	166	450	530 x 160	30
140	SN09A	SN 532	170	379	166	470	550 x 160	30
150	SD10	SD 3134	170	379	172	430 x 100	510 x 180	24
160	SD11	SD 3136	180	396	172	450 x 110	530 x 190	24
170	SD12	SD 3138	190	417	172	480 x 120	560 x 210	24
180	SD12A	SD 3140	210	437	172	510 x 130	610 x 230	30
200	SD13	SD 3144	220	457	172	540 x 140	640 x 240	30
220	SD14	SD 3148	240	510	176	600 x 150	700 x 260	30
240	SD15	SD 3152	260	545	188	650 x 160	770 x 280	36
260	SD16	SD 3156	280	589	204	670 x 160	790 x 280	36
280	SD16A	SD 3160	300	609	204	710 x 190	830 x 310	36
300	SD17	SD3164	320	662	216	750 x 200	880 x 330	36

Bearing & Housings

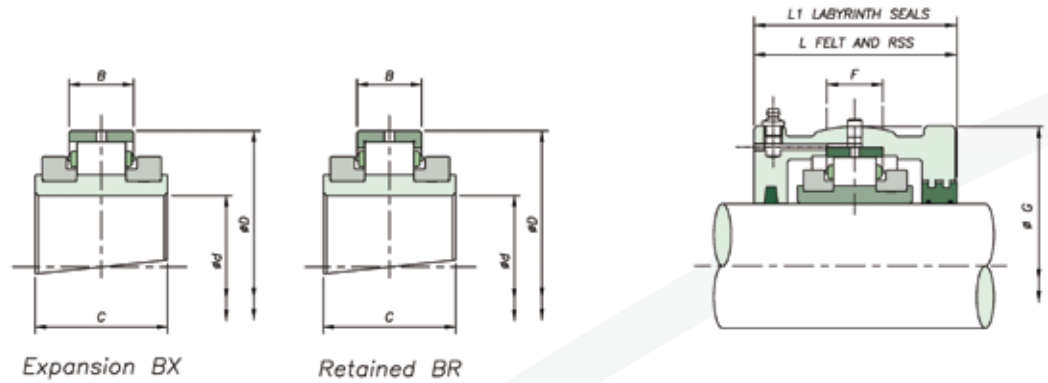

Shaft (d) Reference		Bearings Ratings							Housing Reference				
mm	Add BR for retained Add BX for expansion e.g. LSM35BR	Dynamic C _r (kN/lb)	Static C _r (kN/lb)	Axial C _a (kN/lb)	Max RPM	D	B	C	Add HR for retained Add HX for expansion e.g. LSM35HR	G	F	L	L ₁
35	LSM35	65	68	3.20	5400	84.14	23.80	55.00	LSM35	100.00	25	84	86
40	LSM40	14613	15287	719.38		3.313	0.937	2.165	LSM40	3.937	1.0	3.3	3.4
50	LSM50	83	87	3.60		98.42	25.40	60.00	LSM50	117.48	25	96	98
60	LSM60	18659	19558	809.30	4630	3.875	1.000	2.362		4.625	1.0	3.8	3.9
65	LSM65	103	115	5.40		114.30	27.00	60.00	LSM60	134.94	32	102	104
70	LSM70	23155	25853	1213.95		4.500	1.063	2.362	LSM65	5.313	1.3	4.0	4.1
75	LSM75	138	161	7.60	3310	133.35	31.80	65.00	LSM70	157.16	38	112	114
80	LSM80	31024	36194	1708.53		5.250	1.252	2.559	LSM75	6.187	1.5	4.4	4.5
85	LSM85	187	231	12.40		152.40	38.90	75.00	LSM80	177.80	50	134	136
90	LSM90	42039	51931	2787.59	2790	6.000	1.531	2.953	LSM85	7.000	2.0	5.3	5.4
100	LSM100	288	366	16.00		174.62	45.30	85.00	LSM90				
110	LSM110	64745	82280	3596.90		6.875	1.783	3.346	LSM100	203.20	50	132	134
115	LSM115	316	427	18.60	1970	203.20	46.90	90.00		8.000	2.0	5.2	5.3
125	LSM125	71040	95993	4181.39		8.000	1.846	3.543	LSM110	231.78	64	140	142
135	LSM135	363	496	22.20		222.25	54.00	95.00	LSM115	9.125	2.5	5.5	5.6
140	LSM140	81606	111505	4990.69	1740	8.750	2.126	3.740	LSM125	266.70	76	154	156
150	LSM150	422	585	25.80		241.30	55.60	98.40		10.500	3.0	6.1	6.1
160	LSM160	94869	131513	5799.99		9.500	2.189	3.874	LSM135	279.40	76	166	168
170	LSM170	459	664	29.40	1570	254.00	55.60	98.40	LSM140	11.000	3.0	6.5	6.6
180	LSM180	103187	149273	6609.30		10.000	2.189	3.874	LSM150	295.28	82	172	174
200	LSM200	583	792	33.00		273.05	60.30	109.00		11.625	3.2	6.8	6.9
220	LSM220	131064	178049	7419	1450	273.05	60.30	109.00	LSM160	311.15	76	172	192
240	LSM240	524	828	36.40		285.75	55.50	109.00		12.250	3.0	6.8	7.6
260	LSM260	117800	186142	8183		11.250	2.185	4.291	LSM170	323.85	70	172	200
280	LSM280	614	990	41.00	1220	311.15	60.30	106.00	LSM180	12.750	2.8	6.8	7.9
300	LSM300	138033	222561	9217		12.250	2.374	4.173	LSM200	358.78	86	172	200
		708	1168	49.00		342.90	63.50	115.00		14.125	3.4	6.8	7.9
		159165	262577	11016	930	13.500	2.500	4.528	LSM220	387.35	82	178	216
		744	1289	57.80		374.65	66.70	122.00		15.250	3.2	7.0	8.5
		167258	289779	12994		14.750	2.626	4.803	LSM240	419.10	90	188	222
		848	1502	66.80	820	406.40	69.00	128.00		16.500	3.5	7.4	8.7
		190638	337663	15017		16.000	2.717	5.039	LSM260	454.00	95	204	232
		929	1665	78.20		438.15	74.60	143.00	LSM280	17.874	3.7	8.0	9.1
		208848	374307	17580	730	17.250	2.937	5.630		489.00	98	216	248
									LSM300	19.252	3.9	8.5	9.8


Medium SN/SD Range

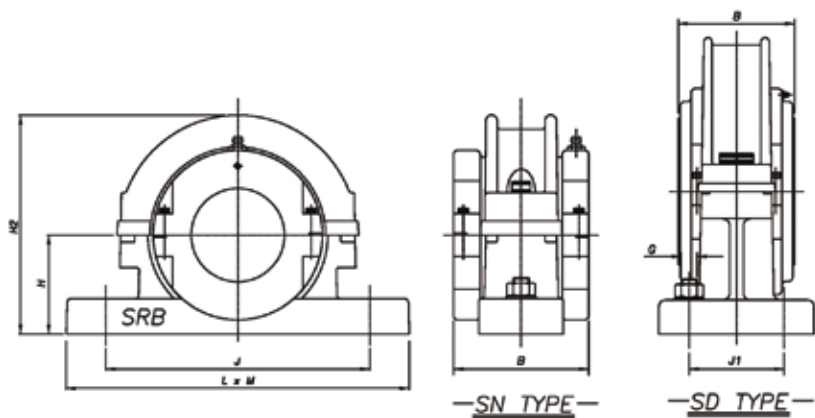

SN SD


Shaft (d) mm	Description	Support Reference	SD Reference	H	J x K	L x M
140	MSM140B	SN09B	SNL532	170	470	550 x 160
150	MSM150B	SD30	SD3134 SNL3134	170	430 x 100	510 x 180
160	MSM160B	SD31	SD3136 SNL3136	180	450 x 110	530 x 190
170	MSM170B	SD32	SD3138 SNL3138	190	480 x 120	560 x 210
180	MSM180B	SD33	SD3140 SNL3140	210	510 x 130	610 x 230
200	MSM200B	SD34	SD3144 SNL3144	220	540 x 140	640 x 240
220	MSM220B	SD35	SD3148 SNL3148	250	600 x 150	700 x 260
240	MSM240B	SD36	SD3152 SNL3152	270	650 x 160	770 x 280
260	MSM260B	SD36A	SD3156 SNL3156	280	670 x 160	790 x 280
280	MSM280B	SD37	SD3160 SNL3160	300	710 x 190	830 x 310
300	MSM300B	SD38	SD3164 SNL3164	320	750 x 200	880 x 330
320	MSM320B	SD39	SNL3168L	340	810 x 220	950 x 360
340	MSM340B	SD40	SNL3172L	350	840 x 220	1000 x 360
360	MSM360B	SD40A	SNL3176L	360	870 x 220	1040 x 360
380	MSM380B	SD41	SNL3180L	380	950 x 240	1120 x 390
400	MSM400B	SD42	SNL3184L	410	1000 x 260	1170 x 420

Bearing & Housings

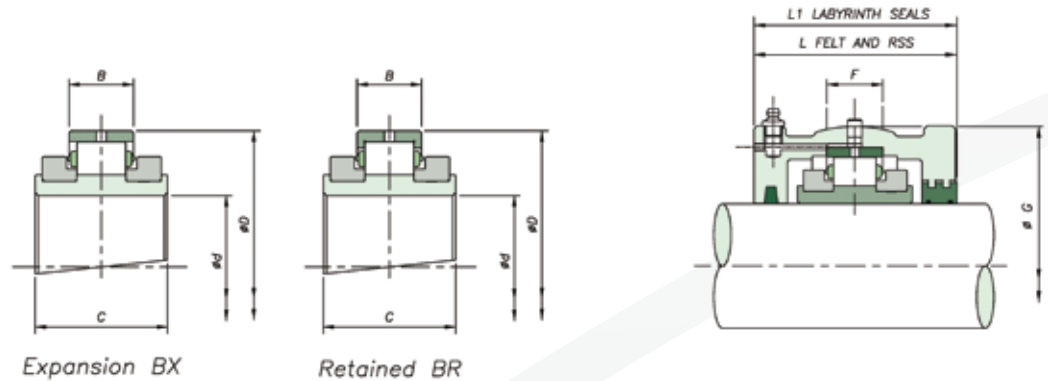

Shaft (d) Reference		Bearings Ratings							Housing Reference				
mm	Description	Dynamic C_r (kN/lb)	Static C_{or} (kN/lb)	Axial C_a (kN/lb)	Max RPM	D	B	C	Housing	G	F	L	L ₁
140	MSM140	600	817	45.50	1450	273.05	66.70	117.50	MSM140	323.95	90	186	188
		134885	183669	10229		10.750				12.754	3.5	7.3	7.4
150	MSM150A	600	817	45.40	1450	273.05	66.70	117.50	MSM150A	336.55	95	202	204
		134885	183669	10206		10.750				13.250	3.7	8.0	8.0
160	MSM160A	730	1034	52.40	1320	292.10	68.30	123.80	MSM160A	336.55	95	202	204
		164111	232452	11780		11.500				13.250	3.7	8.0	8.0
170	MSM170	842	1175	61.40	1200	317.50	83.30	140.00	MSM170	368.30	95	206	232
		189289	264151	13803		12.500				14.500	3.7	8.1	9.1
180	MSM180	927	1357	71.20	1120	330.20	83.30	140.00	MSM180	381.00	95	222	242
		208398	305066	16006		13.000				15.000	3.7	8.7	9.5
200	MSM200	1013	1516	80.00	960	368.30	90.50	156.00	MSM200	425.00	105	235	253
		227731	340810	17985		14.500				16.732	4.1	9.3	10.0
220	MSM220	1138	1668	89.80	850	393.70	90.50	163.00	MSM220	457.20	110	242	274
		255833	374981	20188		15.500				18.000	4.3	9.5	10.8
240	MSM240	1354	2117	98.80	750	431.80	96.80	170.00	MSM240	495.30	118	248	280
		304391	475921	22211		17.000				19.500	4.6	9.8	11.0
260	MSM260	1354	2117	98.80	750	431.80	96.80	170.00	MSM260	495.30	118	248	280
		304391	475921	22211		17.000				19.500	4.6	9.8	11.0
280	MSM280	1476	2357	113.80	670	463.55	101.60	186.00	MSM280	527.10	130	264	300
		331818	529875	25583		18.250				20.752	5.1	10.4	11.8
300	MSM300	1587	2644	129.00	610	495.30	103.20	193.00	MSM300	552.50	128	268	306
		356771	594395	29000		19.500				21.752	5.0	10.6	12.0
320	MSM320	1723	2922	144.20	550	527.05	106.40	192.00	MSM320	587.40	128	298	
		387346	656892	32417		20.750				23.126	5.0	11.7	
340	MSM340	1989	3403	159.20	500	565.15	115.90	200.00	MSM340	628.70	146	305	
		447145	765025	35790		22.250				24.752	5.7	12.0	
360	MSM360	1989	3403	159.20	500	565.15	115.90	200.00	MSM360	628.70	146	305	
		447145	765025	35790		22.250				24.752	5.7	12.0	
380	MSM380	1931	3522	174.40	460	584.20	111.10	200.00	MSM380	628.70	146	305	
		434106	791777	39207		23.000				24.752	5.7	12.0	
400	MSM400	2105	3793	188.40	430	615.95	115.90	200.00	MSM400	685.80	146	324	
		473223	852700	42354		24.250				27.000	5.7	12.8	


SAFR 2 Bolt Pedestal/SAFR 4 Bolt Pedestal

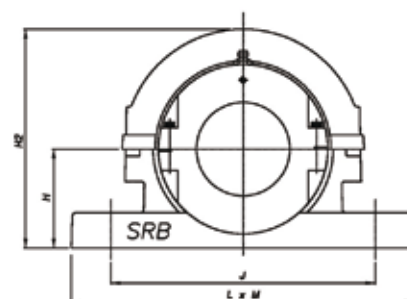

SAFR 2 Bolt Pedestal / SAFR 4 Bolt Pedestal

Shaft (d) mm	Complete Assembly	Additional Bearing Sizes	H	J	S	Bolt Sizes	B	L	M	H
1 15/16"	LSE115HSSAFR511AT	1 11/16", 1 3/4", 2" 45mm, 50mm	2 3/4"	7 5/8"	-	2 x 5/8"	3 13/16"	9 5/8"	2 3/4"	6 1/8"
2 3/16"	LSE203HSSAFR513AT	2 1/4", 2 7/16", 2 1/2" 60mm, 65mm	3"	9 13/16"	-	2 x 5/8"	4 1/16"	11"	3 1/8"	7"
2 7/16"	LSE207HSSAFR515AT	2 3/16", 2 1/4", 2 1/2" 60mm, 65mm	3 1/4"	9 1/8"	-	2 x 5/8"	4 1/16"	11 1/4"	3 1/8"	7 1/4"
2 11/16"	LSE211HSSAFR516AT	2 3/4", 2 15/16", 3" 70mm, 75mm	3 1/2"	10 5/16"	-	2 x 3/4"	4 1/2"	13"	3 1/2"	8"
2 15/16"	LSE215HSSAFR517AT	2 11/16", 2 3/4", 3" 70mm, 75mm	3 3/4"	10 7/16"	-	2 x 3/4"	4 1/2"	13"	3 1/2"	8 1/4"
2 15/16"	MSE215HSSAFR517AT	2 11/16", 2 3/4", 3" 70mm, 75mm	3 3/4"	10 7/16"	2 1/8"	4 x 5/8"	5 1/2"	13"	3 1/2"	8 1/2"
3 3/16"	LSE303HSSAFR518AT	3 1/4", 3 7/16", 3 7/16" 80mm, 85mm, 90mm	4"	11"	-	2 x 3/4"	5 5/16"	13 3/8"	3 7/8"	9 1/2"
3 7/16"	LSE307HSSAFR520AT	3 3/16", 3 1/4", 3 1/2" 80mm, 85mm, 90mm	4 1/2"	12 3/8"	-	2 x 7/8"	5 5/16"	15 1/4"	4 3/8"	10"
3 7/16"	MSE307HSSAFR520AT	3 3/16", 3 1/4", 3 1/2" 80mm, 85mm, 90mm	4 1/2"	12 3/8"	2 3/8"	4 x 3/4"	6 1/16"	15 1/4"	4 3/8"	10 1/4"
3 15/16"	MSE315HSSAFR522AT	3 11/16", 3 3/4", 3 1/2" 100mm, 105mm	4 15/16"	13 9/16"	2 3/4"	4 x 3/4"	5 3/4"	16 1/2"	4 3/4"	11 5/8"
4 7/16"	MSE407HSSAFR526AT	4 3/16", 4 1/2" 110mm, 115mm	6"	15 5/16"	3 1/4"	4 x 3/4"	6 3/8"	18 3/8"	5 1/8"	14 1/4"

Bearing & Housings

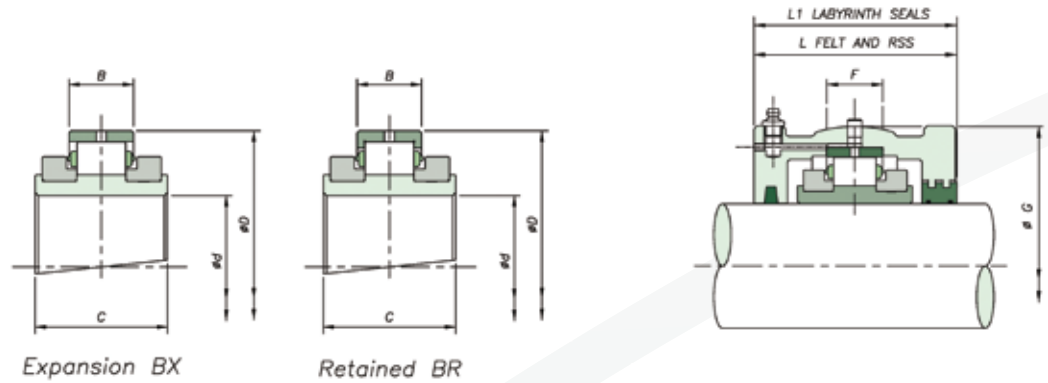

Shaft (d)		Reference		Bearings Ratings							Housing Reference					
inch	mm	Add BR for retained Add BX for expansion e.g. LSM35BR		Dynamic C _r (kN/lb)	Static C _{0r} (kN/lb)	Axial C _a (kN/lb)	Max RPM	D	B	C	Housing Retained	Reference Expansion	G	F	L	L ₁
1 ¹¹ / ₁₆			LSE111													
1 ³ / ₄	45	LSM45	LSE112	83	87	3.60	4630	98.42	25.40	60.00	LS2HR	LS2HX	117.48	25	96	98
1 ¹⁵ / ₁₆	50	LSM50	LSE115	18659	19558	809.30		3.875	1.000	2.362			4.625	1.0	3.8	3.9
2			LSE200													
2 ¹ / ₁₆			LSE203													
2 ¹ / ₄	55	LSM55	LSE204	103	115	5.40	3940	114.30	27.00	60.00	LS3HR	LS3HX	134.94	32	102	104
2 ¹ / ₁₆	60	LSM60	LSE207	23155	25853	1213.95		4.500	1.063	2.362			5.313	1.3	4.0	4.1
2 ¹ / ₂	65	LSM65	LSE208													
2 ³ / ₁₆			LSE203													
2 ¹ / ₄	55	LSM55	LSE204	103	115	5.40	3940	114.30	27.00	60.00	LS3HR	LS3HX	134.94	32	102	104
2 ¹ / ₁₆	60	LSM60	LSE207	23155	25853	1213.95		4.500	1.063	2.362			5.313	1.3	4.0	4.1
2 ¹ / ₂	65	LSM65	LSE208													
2 ¹¹ / ₁₆			LSE211													
2 ³ / ₄	70	LSM70	LSE212	138	161	7.60	3310	133.35	31.80	65.00	LS4HR	LS4HX	157.16	38	112	114
2 ¹⁵ / ₁₆	75	LSM75	LSE215	31024	36194	1708.53		5.259	1.252	2.559			6.187	1.5	4.4	4.5
3			LSE300													
2 ¹¹ / ₁₆			LSE211													
2 ³ / ₄	70	LSM70	LSE212	138	161	7.60	3310	133.35	31.80	65.00	LS4HR	LS4HX	157.16	38	112	114
2 ¹⁵ / ₁₆	75	LSM75	LSE215	31024	36194	1708.53		5.250	1.252	2.559			6.187	1.5	4.4	4.5
3			LSE300													
2 ¹¹ / ₁₆			LSE211													
2 ³ / ₄	70	MSM70	LSE212	258	300	10.60	3080	149.22	46.10	82.60	MS5HR	MS5HX	177.80	50	138	140
2 ¹⁵ / ₁₆	75	MSM75	LSE215	58001	67443	2383		5.875	1.815	3.252			7.000	2.0	5.4	5.5
3			LSE300													
3 ¹ / ₁₆			LSE303													
3 ¹ / ₄	80	LSM80	LSE304	187	231	12.40	2790	152.4	38.90	75.00	LS5HR	LS5HX	177.80	50	134	136
3 ¹ / ₁₆	85	LSM85	LSE307	42039	51931	2787.59		6.000	1.531	2.953			7000	2.0	5.3	5.4
3 ¹ / ₂	90	LSM90	LSE308													
3 ¹ / ₁₆			LSE303													
3 ¹ / ₄	80	LSM80	LSE304	187	231	12.40	2790	152.4	38.90	75.00	LS5HR	LS5HX	177.80	50	134	136
3 ¹ / ₁₆	85	LSM85	LSE307	42039	51931	2787.59		6.000	1.531	2.953			7000	2.0	5.3	5.4
3 ¹ / ₂	90	LSM90	LSE308													
3 ¹ / ₁₆			LSE303													
3 ¹ / ₄	80	MSM80	LSE304	297	353	17.80	2520	169.86	48.40	89.70	MS6HR	MS6HX	203.20	50	152	154
3 ¹ / ₁₆	85	MSM85	LSE307	66768	79358	4002		6.687	1.906	3.531			8.000	2.0	6.0	6.1
3 ¹ / ₂	90	MSM90	LSE308													
3 ¹¹ / ₁₆			LSE311													
3 ³ / ₄	100	MSM100	LSE312	388	491	25.00	2130	193.68	51.60	92.10	MS7HR	MS7HX	231.78	64	144	146
3 ¹⁵ / ₁₆	105	MSM105	LSE315	87226	110381	5620		7.625	2.031	3.626			9.125	2.5	5.7	5.7
4			LSE400													
4 ¹ / ₁₆			LSE403													
4 ¹ / ₄	110	MSM110	LSE404	454	592	31.20	1820	228.60	57.20	100.00	MS8HR	MS8HX	266.70	76	160	162
4 ¹ / ₁₆	115	MSM115	LSE407	102063	133087	7014		9.000	2.252	3.937			10.500	3.0	6.3	6.4
4 ¹ / ₂			LSE408													

Bearing Selection

Dynamic Loading

Selection of SRB split roller bearings must take into account the effects of both radial and axial loads. These loads must be considered independently of each other.

Radial Load Considerations

The basic rating life of a bearing can be derived from the formulae laid down in ISO281:1990

$$L_{10} = (C/P)^{10/3} \text{ (10}^6 \text{ Revolutions)} \quad - (i)$$

In the majority of cases where the speed remains constant then the life can be expressed in hours from the formula

$$L_{10}h = \frac{(10^6) \times L_{10}}{60 \times n} \quad - (ii)$$

Substituting – (i)

$$L_{10}h = \frac{(10^6) \times}{60 \times n} \left(\frac{C}{P} \right)^{10/3} \quad - (ii)$$

L_{10} = Basic Rating Life (90% reliability), 10⁶ Revolutions

$L_{10}h$ = Basic Rating Life (90% Reliability), Hours

C = Bearing Dynamic Capacity, kN

n = Speed, min⁻¹

P = Equivalent Bearing Load

This calculation assumes for the load components considered for an individual bearing, that the shaft system is a beam resting on rigid, moment free supports. Elastic deformations in the bearing, housing or machine structure are not taken into account.

Equivalent Load "P"

As previously stated radial and axial loads must be considered separately for split roller bearings. For the calculation of theoretical life only radial loads are considered.

Fr = Radial Loads

The value of Fr is that calculated from standard mechanical formulae, the impact of additional forces resulting from external influences must also be considered.

Fz = Factor

Load Condition	Factor Fz
Steady	1.0 to 1.3
Light Shock or Out of Balance	1.3 to 2.0
Heavy Shock or Vibration	2.0 to 3.0

Under the influence of the above conditions

$$P = F_r \times F_z$$

The required theoretical bearing life is based upon a number of factors, including reliability, accessibility and service considerations. Generally life values should be as follows:

Guide to Life Values	
Machine Used Intermittently	500 to 2,000 hours
Occasional Use	5,000 to 10,000 hours
Normal Operation	20,000 to 50,000 hours
Continuous Operation	75,000 to 100,000 hours
High Reliability	> 100,000 hours

Adjusted Life Calculation

The L10 fatigue life calculation is based upon the rating life of a large number of identical bearings expressed as a number of revolutions operating at a constant speed. This rating life is reached or exceeded by 90% of these before the first evidence of fatigue appears.

The above definition applies to bearings operating under optimum conditions. Variations in operating conditions will lead to changes in the life of these bearings.

ISO281 allows for an adjusted life calculation:

$$L_{hna} = a_1 \times a_2 \times a_3 \times L_{10h}$$

Where

L_{hna} = Adjusted Life

L_{10h} = Rating Life in Hours

a_1 = Life adjustment factor, failure probability other than 10%

a_2 = Life adjustment factor, material properties

a_3 = Life adjustment factor, operating conditions

a_1 Factor

In cases where a failure rate other than 10% is required, then an a_1 factor as in the table below, should be applied.

Table A1

Adjustment Factor						
Failure Probability %	10	5	4	3	2	1
Factor a_1	1.00	0.62	0.53	0.44	0.33	0.21

a_2 Factor

This factor takes into account the material properties.

a_3 Factor

The a_3 factor considers all operational parameters that influence fatigue life. The most obvious of these is lubrication. The highest life values are achieved where a state of hydrodynamic lubrication exists, in this state no metal to metal contact occurs.


Decreasing effectiveness of lubricant due to decreasing film thickness or effects of contamination will reduce the a_3 factor.

Due to the interrelationships between materials adjustment factor a_2 and operating adjustment factor a_3 , a common factor a_{23} is frequently used.

a_{23} Factor

$$a_{23} = a_2 \times a_3$$


The a_{23} factor can be taken from fig 1:

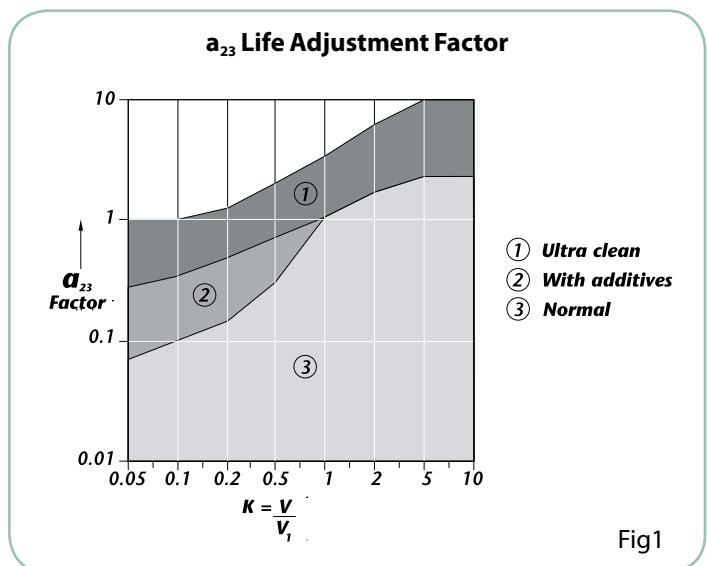

V_1 = Rated Viscosity (Depends on bearing size and operating speed)


V = Operating Viscosity (Depends on original viscosity and operating temperature)

Values for V and V_1 are obtained from the following graphs:

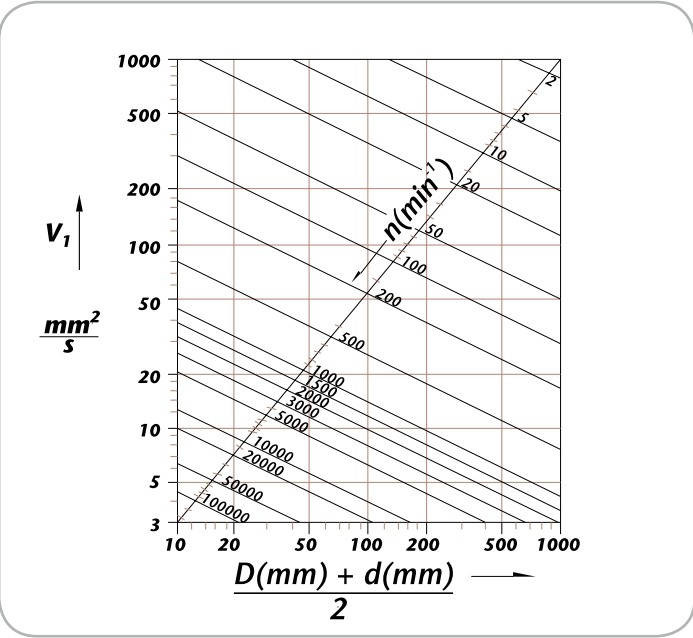

Where D = Bearing outside diameter
 d = Bearing Bore
 n – Shaft speed (RPM)

V_1 is then read off the vertical axis.

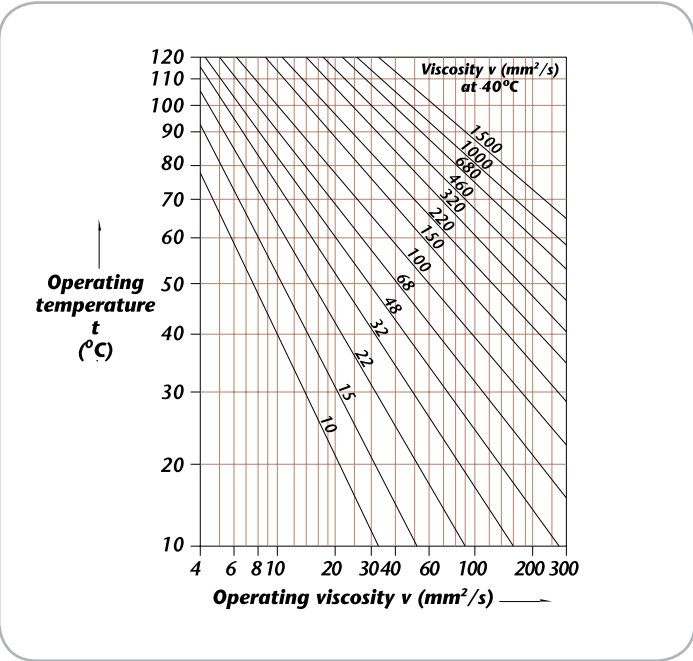

Using the operating temperature and nominal lubricant viscosity, the value for operating viscosity, V , is read off the horizontal axis.

Static Loading

In situations where bearings rotate slowly (<10 rpm), oscillate slowly, are stationary for prolonged periods, or subject to high shock loads, it is important to check that no permanent deformations occur between rolling elements and raceways at peak load.

The basic static load rating is defined in ISO 76:1987 and refers to the contact stress at the centre of the most heavily loaded rolling element/raceway contact area. For roller bearings this value is 4000 Mpa. This will result in a permanent deformation of 0.0001 of the roller diameter.

The required static load rating can be determined from:

$$C_o = F_s \cdot P_o$$

C_o = Basic Static Load Rating
 P_o = Equivalent Static Load
 F_s = Static Safety Factor

Guidelines for the Static Safety Factor F_s can be found in the table below:

Nature of Duty	Requirements for Duty		
	Low	Medium	High
Smooth no Vibration	1.0	1.5	3.0
Normal	1.0	1.5	3.5
Heavy	>2.5	>3.0	>4.0

Axial Considerations

Axial Load

Bearing selection, on an axial load basis, must be considered independently from the radial load.


1. Calculate the axial loads acting on the bearing
2. Multiply each load by the appropriate dynamic factor f_z
3. Combine these loads to determine the effective axial load P_a
4. Select a bearing having a C_a value greater than the product of $P_a \times f_{dn}$, d.n is the product of the shaft size in mm and the speed in r.p.m. To determine f_{dn} use the velocity graph below.

Axial Ratings C_a

These ratings are for constant loads with oil or extra pressure greases. If greases without extra pressure additives are applied then the catalogue rating must be decreased by 50%. In instances where bearings operate at over 50% of their catalogue speed rating and over 50% of their axial load ratings (C_a) then recessed shafts should be considered. Please contact our Technical Services Department.

VELOCITY

APPLIES ONLY TO AXIAL LOADS
ON BR RETAINED BEARINGS.
BEARING BORE = d
BEARING R.P.M. = n

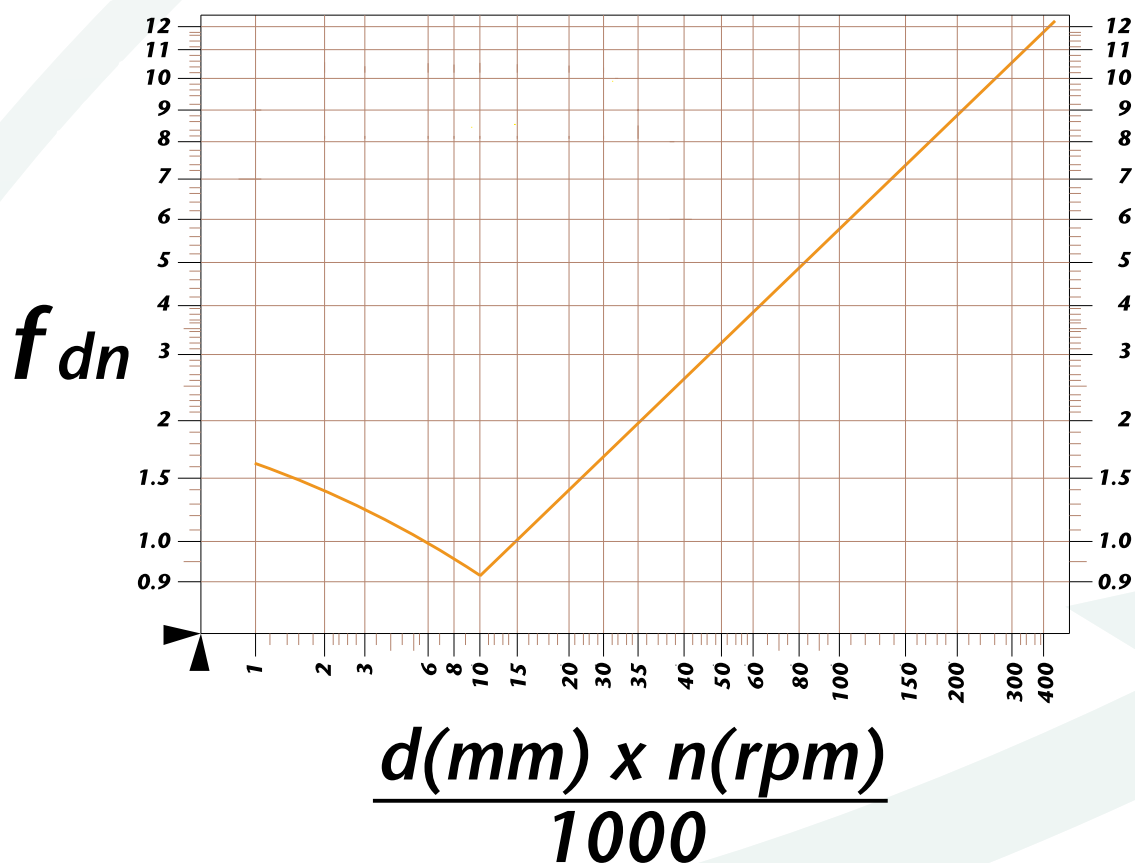

Bearing Ratings

Light Series					
Shaft (d)		Bearings Ratings			
mm	inch	Dynamic C _r (kN/lb)	Static C _{0r} (kN/lb)	Axial C _a (kN/lb)	Max RPM
35	1 ¹ / ₁₆	65	68	3.20	5400
40	1 ¹ / ₂	14613	15287	719.38	
45	1 ¹¹ / ₁₆	83	87	3.60	4630
50	2	18659	19558	809.30	
60	2 ³ / ₁₆	103	115	5.40	3940
65	2 ¹ / ₂	23155	25853	1213.95	
70	2 ¹¹ / ₁₆	138	161	7.60	3310
75	3	31024	36194	1708.53	
80	3 ³ / ₁₆	187	231	12.40	2790
90	3 ¹ / ₂	42039	51931	2787.59	
100	3 ¹¹ / ₁₆	288	366	16.00	2340
105	4	64745	82280	3596.90	
110	4 ³ / ₁₆	316	427	18.60	1970
115	4 ¹ / ₂	71040	95993	4181.39	
120	4 ¹¹ / ₁₆	363	496	22.20	1740
130	5	81606	111505	4990.69	
135	5 ³ / ₁₆	422	585	25.80	1570
140	5 ¹ / ₂	94869	131513	5799.99	
150	5 ¹¹ / ₁₆	459	664	29.40	1450
155	6	103187	149273	6609.30	
160	6 ³ / ₁₆	583	792	33.00	1320
160	6 ¹ / ₂	131064	178049	7419	
170	6 ¹¹ / ₁₆	524	828	36.40	1220
180	7	117800	186142	8183	
190	7 ¹ / ₄	614	990	41.00	1070
200	8	138033	222561	9217	
220	8 ³ / ₂	708	1168	49.00	930
230	9	159165	262577	11016	
240	9 ¹ / ₂	744	1289	57.80	820
250	10	167258	289779	12994	
260	10 ³ / ₂	848	1502	66.80	730
280	11	190638	337663	15017	
300	11 ¹ / ₂	929	1665	78.20	650
305	12	208848	374307	17580	
320	12 ¹ / ₂	920	1674	89.00	590
330	13	206824	376330	20008	
340	14	1022	1965	99.60	540
350		229755	441745	22391	
360	15	1224	2431	110.40	500
380		275166	546511	24819	
400	16	1107	2266	115.60	460
		248864	509417	25988	
420	17	1146	2418	121.00	430
		257631	543588	27202	
440	18	1185	2469	127.20	410
460		266399	555053	28596	
480	19	1348	2965	132.60	380
		303042	666559	29810	
500	20	1392	3139	137.80	360
		312934	705675	30979	
530	21	1431	3316	140.60	340
		321702	745466	31608	
560	22	1472	3490	142.40	330
		330919	784583	32013	
580	23	1616	3841	144.00	310
		363291	863491	32372	
600	24	1660	4033	146.80	300
		373183	906654	33002	

Medium Series					
Shaft (d)		Bearings Ratings			
mm	inch	Dynamic C _r (kN/lb)	Static C _{0r} (kN/lb)	Axial C _a (kN/lb)	Max RPM
45	1 ¹¹ / ₁₆	121	127	6.20	4350
50	2	27202	28551	1394	
55	2 ³ / ₁₆	168	190	8.80	3680
65	2 ¹ / ₂	37768	42714	1978	
70	2 ¹¹ / ₁₆	258	300	10.60	3080
75	3	58001	67443	2383	
80	3 ³ / ₁₆	297	353	17.80	2520
90	3 ¹ / ₂	66768	79358	4002	
100	3 ¹¹ / ₁₆	388	491	25.00	2130
105	4	87226	110381	5620	
110	4 ³ / ₁₆	454	592	31.20	1820
115	4 ¹ / ₂	102063	133087	7014	
120	4 ¹¹ / ₁₆	525	700	38.20	1600
130	5	118025	157366	8588	
135	5 ³ / ₁₆	600	817	45.40	1450
140	5 ¹ / ₂	134885	183669	10206	
150	5 ¹¹ / ₁₆	730	1034	52.40	1320
155	6	164111	232453	11780	
160	6 ³ / ₁₆	842	1175	61.40	1200
170	6 ¹ / ₂	189289	264151	13803	
180	6 ¹¹ / ₁₆	927	1357	71.20	1120
		208398	305066	16006	
190	7 ¹ / ₄	1013	1516	80.00	960
200	8	227732	340810	17985	
220	8 ³ / ₂	1138	1668	89.80	850
230	9	255833	374981	20188	
240	9 ¹ / ₂	1354	2117	98.80	750
260	10	304391	475921	22211	
270	10 ³ / ₂	1476	2357	113.80	670
280	11	331818	529875	25583	
300	11 ¹ / ₂	1587	2644	129.00	610
305	12	356772	594395	29000	
320	12 ¹ / ₂	1723	2922	144.20	550
330	13	387346	656892	32417	
340	14	1989	3403	159.20	500
360		447145	765025	35790	
380	15	1931	3522	174.40	460
		434106	791777	39207	
400	16	2105	3793	188.40	430
		473223	852701	42354	
420	17	2324	4164	202.00	400
		522456	936105	45411	
440	18	2215	4183	216.00	380
460		497952	940376	48559	
480	19	2445	4594	230.00	360
		549658	1032773	51706	
500	20	2453	4923	244.00	340
		551456	1106734	54853	
530	21	2702	5415	258.00	330
		607434	1217340	58001	
560	22	2851	5740	272.00	310
		640930	1290403	61148	
580	23	2982	6173	286.00	300
		670380	1387746	64295	
600	24	2972	6185	300.00	290
		668132	1390443	67443	

Heavy Series					
Shaft (d)		Bearings Ratings			
mm	inch	Dynamic C _r (kN/lb)	Static C _{0r} (kN/lb)	Axial C _a (kN/lb)	Max RPM
100	3 ¹¹ / ₁₆	653	783	31.20	1820
105	4	146800	176025	7014	
110	4 ³ / ₁₆	656	801	39.10	1640
120	4 ¹ / ₂	147475	180072	8790	
125	4 ¹¹ / ₁₆	753	974	49.00	1500
130	5	169281	218964	11016	
135	5 ³ / ₁₆	928	1265	58.80	1340
140	5 ¹ / ₂	208623	284383	13219	
150	5 ¹¹ / ₁₆	1037	1325	69.40	1220
155	6	233127	297872	15602	
160	6 ³ / ₁₆	1196	1576	79.20	1110
170	6 ¹ / ₂	268871	354299	17805	
175	6 ³ / ₄	1330	1867	89.00	1030
180	7	298996	419718	20008	
190	7 ¹ / ₄	1597	2285	99.60	880
200	8	359020	513688	22391	
220	8 ³ / ₂	1665	2455	109.40	760
230	9	374307	551906	24594	
240	9 ¹ / ₂	1896	2789	130.80	700
260	10	426238	626992	29405	
280	11	2202	3507	153.00	620
		495029	788405	34396	
300	12	2337	3650	174.40	560
		525379	820553	39207	
320	13	2718	4093	198.80	500
		611031	920143	44692	
340	14	2935	4973	213.60	460
360		659814	1117975	48019	
380	15	3195	5238	250.80	420
400	16	718265	1177550	56382	
420	17	3582	6377	275.80	360
440		805266	1433607	62002	
460	18	3807	6611	302.40	340
		855848	1486212	67982	
500	20	4660	8183	347.00	310
530	21	1047610	1839612	78009	
560	22	4795	9412	382.60	280
		1077959	2115902	86012	
580	23	4951	9451	400	270
600	24	1113029	2124669	89924	

Axial load ratings (C_a) assume the use of EP additives or oil lubrication, otherwise use 50% of values.
Higher loads and speeds may be permissible. Please contact SRB Technical Services.

Bearing Clearance and Temperature Considerations

SRB bearings are manufactured to give an ISO 'CN' clearance as standard. At specific customer request, bearings may be produced with any clearance to suit a particular application. When assessing the requirement for special clearances, it is particularly important to consider the differential temperature between shaft and housing. It should also be noted that an increase in bearing clearance will lead to a small reduction in bearing capacity. Typically a C3 clearance will reduce capacity by 5% and C5 clearance by 10%.

SRB bearings can also be produced as C2. This clearance is smaller than CN and is typically used in applications involving shock or reciprocating loads.

Cleanliness of component parts when fitting will have a direct impact on the running clearance of the bearing. This is of particular importance when fitting new bearings into existing cast iron or refitting bearings after maintenance. Special care must be taken to remove build-ups of aged grease and other contaminants in order to avoid reducing the bearing clearance when fitted.

When selecting bearings for use at elevated temperatures, consideration should also be given to the bearings dimensional stability. SRB bearings are tempered to give stability up to 140°C (284°F). In order to operate at higher temperatures, bearings must be specially heat-treated. This process will lead to a reduction in capacity as a result of the reduced hardness.


The designations for specially heat-treated bearings are in line with those quoted in ISO standards. The effects of temperature stabilisation are detailed in the table shown.

Operating Temperature	200°C 392°F	250°C 482°F	300°C 572°F
Designation	S1	S2	S3
Reduction in Capacity	10%	25%	40%

Support Loads

Throughout the SRB range, the support units have been designed to provide a rigid and stable base to enable the associated bearing to operate to its full potential. With this in mind, all types of SRB support unit are manufactured from Grade 250 cast iron (BS EN1561:1997) and include strengthening webs and ribs to provide a highly robust unit. In order to compliment the inherent strength, we recommend that careful consideration be given to the siting and mounting of the support unit.

To determine a supports suitability, one should consider the resultant effective load derived in the bearing selection process and the direction of that load. The diagram shown indicates the area in which the full C_{or} rating of the bearing may be applied. Should the direction of the applied load be outside this area it may be necessary to consider alternative designs or materials. SRB Technical Services have a proven track record of innovative solutions and would be happy to provide assistance.

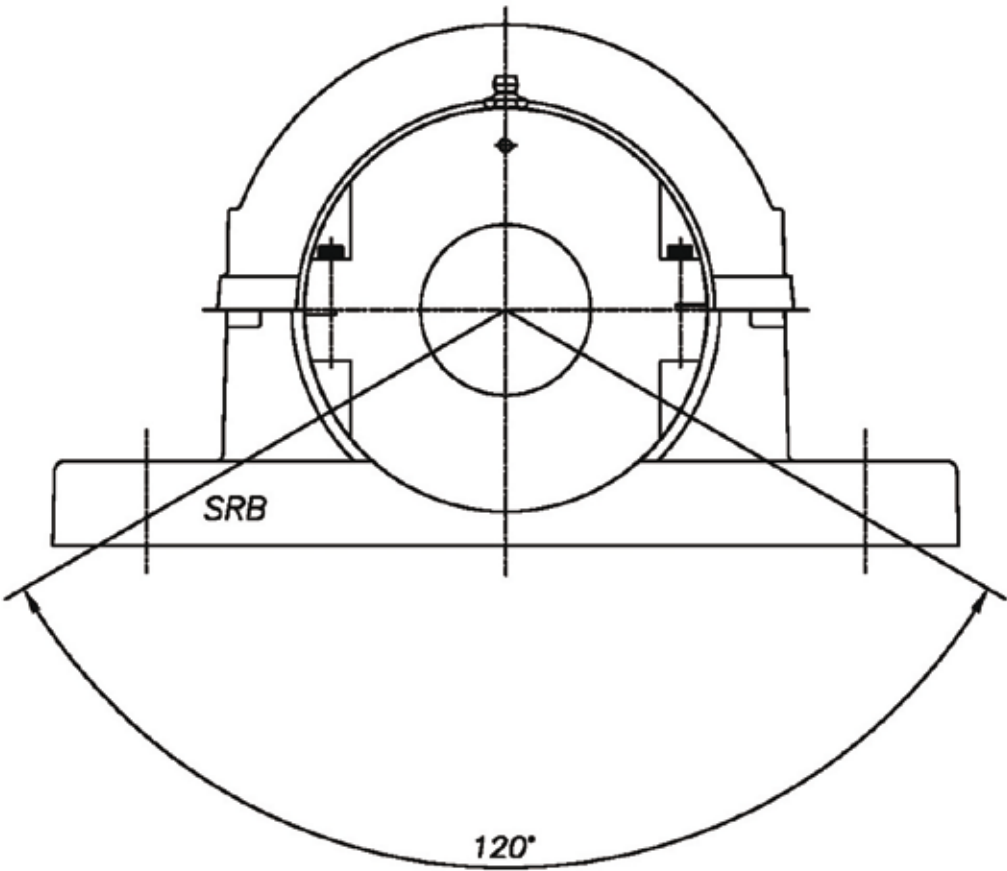

Bearing Frequencies

Condition monitoring is the collection, storage, comparison and evaluation of data taken to establish the running condition of a machine. The data can be made up of several parameters, for example, electric current, pressure, brush wear, vibration and temperature, to name a few. Vibration Analysis is the area of condition monitoring concerned with evaluating and identifying the source of vibration within a system and assessing it's severity and hence proposing the required maintenance action.



The individual components of any bearing will exhibit frequency characteristics which will identify it within a system subject to vibration analysis. For SRB bearings these characteristic frequencies are detailed in the tables opposite. The values given are for a nominal speed of 1 RPM. To obtain the correct frequency required for vibration analysis software, multiply by the speed of rotation in RPM.

For further information on Condition monitoring services please contact SRB Technical.

Bearing Frequencies Table (Hz)

Light Series						Medium Series						Heavy Series					
mm	inch	Inner Race	Outer Race	Roller	Cage	mm	inch	Inner Race	Outer Race	Roller	Cage	mm	inch	Inner Race	Outer Race	Roller	Cage
35 40	1 ³ / ₁₆ 1 ¹ / ₂	5.878	4.122	2.760	0.412												
45 50	1 ¹¹ / ₁₆ 2	5.852	4.148	2.847	0.415												
60 65	2 ³ / ₁₆ 2 ¹ / ₂	6.932	5.068	3.140	0.422												
70 75	2 ¹¹ / ₁₆ 3	6.902	5.098	3.252	0.425												
80 90	3 ³ / ₁₆ 3 ¹ / ₂	8.017	5.983	3.370	0.427												
100 105	3 ¹¹ / ₁₆ 4	8.089	5.911	3.137	0.422												
110 115	4 ³ / ₁₆ 4 ¹ / ₂	9.109	6.891	3.538	0.431												
120 130	4 ¹¹ / ₁₆ 5	9.100	6.900	3.569	0.431												
135 140	5 ³ / ₁₆ 5 ¹ / ₂	9.087	6.913	3.612	0.432												
150 155	5 ¹¹ / ₁₆ 6	10.159	7.841	3.819	0.436												
160	6 ⁷ / ₁₆ 6 ¹ / ₂	10.162	7.838	3.809	0.435	45 50	1 ¹¹ / ₁₆ 2	5.988	4.012	2.432	0.401	100 105	3 ¹¹ / ₁₆ 4	6.073	3.927	2.446	0.402
170 180	6 ¹¹ / ₁₆ 7	12.223	9.777	4.442	0.444	55 65	2 ³ / ₁₆ 2 ¹ / ₂	7.091	4.909	2.659	0.409	110 120	4 ⁷ / ₁₆ 4 ¹ / ₂	5.982	4.018	2.601	0.407
190 200	7 ¹ / ₄ 8	12.204	9.796	4.515	0.445	70 75	2 ¹¹ / ₁₆ 3	7.153	4.847	2.506	0.404	125 130	4 ¹⁵ / ₁₆ 5	7.114	4.886	2.690	0.410
220 230	8 ¹ / ₂ 9	11.064	8.936	4.645	0.447	80 90	3 ³ / ₁₆ 3 ¹ / ₂	7.091	4.909	2.659	0.409	135 140	5 ³ / ₁₆ 5 ¹ / ₂	7.079	4.921	2.422	0.401
240 250	9 ¹ / ₂ 10	12.058	9.942	5.152	0.452	100 105	3 ¹¹ / ₁₆ 4	8.205	5.795	2.818	0.414	150 155	5 ¹¹ / ₁₆ 6	7.190	4.810	2.570	0.406
260 280	10 ¹ / ₂ 11	12.025	9.975	5.319	0.453	110 115	4 ³ / ₁₆ 4 ¹ / ₂	8.143	5.857	2.981	0.418	160 170	6 ⁷ / ₁₆ 6 ¹¹ / ₁₆	7.126	4.874	2.727	0.411
300 305	11 ¹ / ₂ 12	13.087	10.913	5.472	0.455	120 130	4 ¹¹ / ₁₆ 5	8.105	5.895	3.088	0.421	175 180	6 ³ / ₄ 7	8.243	5.757	2.779	0.413
320 330	12 ¹ / ₂ 13	13.028	10.972	5.795	0.457	135 140	5 ³ / ₁₆ 5 ¹ / ₂	8.082	5.918	3.157	0.423	190 200	7 ¹ / ₄ 8	7.047	4.953	3.097	0.421
340 350	14	14.045	11.955	6.180	0.460	150 155	5 ¹¹ / ₁₆ 6	9.225	6.775	3.188	0.423	220 230	8 ¹ / ₂ 9	8.102	5.898	3.240	0.425
360 380	15	15.058	12.942	6.580	0.462	160 170	6 ⁷ / ₁₆ 6 ¹ / ₂	8.107	5.893	3.083	0.421	240 260	9 ¹ / ₂ 10	8.056	5.944	3.520	0.430
400	16	16.076	13.924	6.935	0.464	180	6 ¹¹ / ₁₆ 7	9.192	6.808	3.281	0.425	280	11	9.114	6.886	3.280	0.425
420	17	17.088	14.912	7.319	0.466	190 200	7 ¹ / ₄ 8	9.119	6.881	3.505	0.430	300	12	8.043	5.957	3.088	0.421
440 460	18	18.094	15.906	7.739	0.468	220 230	8 ¹ / ₂ 9	9.161	6.839	3.372	0.427	320	13	8.105	5.895	3.591	0.432
480	19	18.102	15.898	7.684	0.468	240 260	9 ¹ / ₂ 10	9.082	6.918	3.628	0.432	340 360	14	9.093	6.907	3.530	0.431
500	20	19.115	16.885	8.038	0.469	270 280	10 ¹ / ₂ 11	10.162	7.838	3.808	0.435	380 400	15 16	9.111	6.889		
530	21	20.117	17.883	8.479	0.471	300 305	11 ¹ / ₂ 12	11.207	8.793	4.082	0.440	420 440	17	11.158	8.842		
560	22	21.127	18.873	8.841	0.472	320 330	12 ¹ / ₂ 13	11.170	8.830	4.217	0.442	460	18	10.125	7.875		
580	23	21.140	18.860	8.744	0.472	340 360	14	11.180	8.820	4.178	0.441	500 530	20 21	10.132	7.868		
600	24	22.153	19.847	9.078	0.473	380	15	11.037	8.963	4.769	0.448	560	22	12.159	9.841	4.916	0.450
						400	16	12.169	9.831	4.651	0.447	580 600	23 24	13.208	10.792		
						420	17	12.195	9.805	4.548	0.446						
						440 460	18	13.160	10.840	5.122	0.452						
						480	19	13.181	10.819	5.031	0.451						
						500	20	14.153	11.847	5.593	0.456						
						530	21	14.160	11.840	5.559	0.455						
						560	22	15.200	12.800	5.793	0.457						
						580	23	15.203	12.797	5.778	0.457						
						600	24	15.168	12.832	5.951	0.458						

Shaft Considerations

It is essential that the shaft on to which the bearing is to be mounted has been produced to the correct size and tolerance for the operating conditions. If replacing a bearing in an existing system, the shaft must be checked to establish if any wear or damage has taken place. The table below may be followed for both the manufacture of new shafts and the inspection of existing shafts.

Tolerance units are 0.001 mm / 0.001 inches. All tolerances are +0.000

Shaft Dia.	dn<50000 & C/P>10	50000<dn<150000 & C/P>10	50000<dn<150000 & C/P<10	dn>150000	Cylindricity of Shaft
	h9	h8	h7	h6	IT6
0 - 50 mm 0 - 2"	-62 -2.5	-39 -1.5	-25 -1	-16 -0.6	-16 -0.6
50 - 80 mm 2 - 3"	-74 -3	-46 -1.8	-30 -1.2	-19 -0.7	-19 -0.7
80 - 120 mm 3 - 5"	-87 -3.5	-54 -2.1	-35 -1.4	-22 -0.9	-22 -0.9
120 - 180 mm 5 - 7"	-100 -3.9	-63 -2.5	-40 -1.6	-25 -1	-25 -1
180 - 250 mm 7 - 10"	-115 -4.5	-72 -2.8	-46 -1.8	-29 -1.2	-29 -1.2
250 - 315 mm 10 - 12½"	-130 -5.1	-81 -3.2	-52 -2	-32 -1.3	-32 -1.3
315 - 400 mm 12½ - 15½"	-140 -5.5	-89 -3.5	-57 -2.2	-36 -1.4	-36 -1.4
400 - 500 mm 15½ - 19½"	-155 -6.1	-97 -3.8	-63 -2.5	-40 -1.6	-40 -1.6
500 - 600 mm 19½ - 24"	-175 -6.9	-110 -4.3	-70 -2.8	-44 -1.7	-44 -1.7


Recess Mounting

In applications where the resultant axial load exceeds 50% of the Ca rating for the bearing, the shaft design should include either a recess for bearing seating or grooves to accommodate retaining rings. Such an arrangement should also be considered if the unit is subjected to shock loads, fluctuations in temperature over 100°C or the shaft is vertical.

The dimensions for producing an appropriate recess or for governing the position and size of the retaining rings if used are derived from the following table.

Journal Diameter d	Shoulder Diameter 'D' mm	Fillet Radii	Shoulder Height B	Recess Width R	Squareness of Abutment Faces
40 - 90mm 1½" - 3½"	d + 5mm	1.2mm	2.5mm	C + 0.1mm C + 0.3mm	0.1mm
Over 90 - 150mm Over 3½" - 6"	d + 10mm	2.0mm	5.0mm	C + 0.15mm C + 0.40mm	0.1mm
Over 155mm Over 6"	d + 10mm	2.3mm	5.0mm	C + 0.2mm C + 0.5mm	0.1mm

N.B. Width of recesses for standard bearings may be different from that used for existing products. Please consult SRB Technical Services department for bearings suitable for other recess sizes.

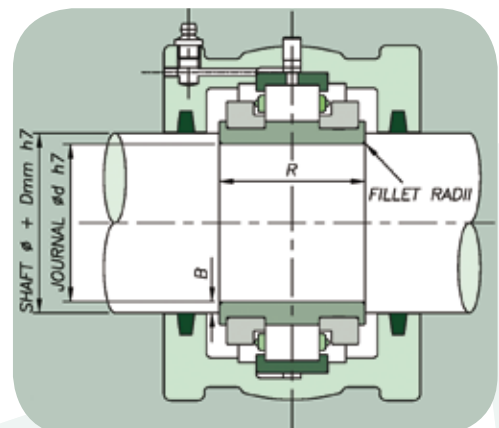

The above figures are unitary values. For the appropriate frequency, multiply by application RPM.

Bearing Lubrication

The function of a lubricant in a rolling element bearing is to prevent metal to metal contact between components, prevent wear and protect against corrosion. Two methods of lubrication are normally employed grease and oil. In the case of SRB Split Bearings grease lubrication is most often employed.

Grease Lubrication

Greases can be used to lubricate SRB split roller bearings under most normal conditions. Grease is the preferred method of lubrication because it can be more easily retained within the bearing enclosure and housing, the latter simplifying sealing arrangements. Greases are essentially oils thickened usually with a metal soap, other ingredients are additives such as rust inhibitors, or extra pressure additives. The oils employed may be mineral or synthetic depending upon the application.

SRB bearings are heat treated to retain dimensional stability up to 140°C. At temperatures up to 100°C, standard high quality greases may be used. We suggest good quality lithium soap or complex based greases having extra pressure additives and a penetration number of 3. It is important to note that all values given in this catalogue for axial capacity assume the use of a grease with extra pressure (EP) additives. If EP additives are not present then axial capacity is reduced by 50%

At temperatures exceeding 100°C care must be taken to ensure that the correct thickener and viscosity of base oil are selected. The performance of grease at such temperatures is dependent on a stable thickener and the temperature/viscosity ratio of the base oil. A stable base oil and soap thickener are important as is the ability of the oil to offer adequate viscosity at an elevated temperature.

In cases of water splash, calcium soap based greases may be used, these are particularly resistant to water wash out.

Care should be taken when mixing greases with different soap thickeners and base oil types. Please contact SRB Technical Services for further advice.

For initial lubrication the bearing should always be well filled with grease. The remaining housing space should be filled as follows.

At low speeds, not exceeding 25% of catalogue speed rating, we suggest that the remaining housing space be fully filled with grease.

At medium speeds, between 25 and 50% of catalogue speed rating, the remaining housing space may be 1/3 to 1/2 filled with grease.

At high speeds, exceeding 50% of catalogue speed rating, the remaining housing space should be left empty.

Re-lubrication

The re-lubrication intervals will be dependent on the prevailing operating conditions.

Greases age and oxidise due to a number of considerations these include load, speed, temperature, cleanliness, presence of water and even airflow through the bearing.

For retained type bearings, initial re-lubrication intervals for guidance purposes would be 2 – 4 weeks with 3 – 6 mls added. For expansion type bearings, initial re-lubrication intervals would be 3 – 4 months with 3 – 6 mls added. More accurate intervals and quantities should be established from observations taken during bearing operation. If re-lubrication can be carried out whilst the bearing is in operation, this will allow for even distribution of the grease. This means of re-lubrication should only be undertaken if it is safe to do so.

Oil Lubrication

SRB split roller bearings are rarely lubricated with oil. In cases where oil is selected as a means of lubrication, then special consideration must be given to the bearing housing design and sealing.

There are three principal methods of oil lubrication:

Oil Sump:

The oil sits in the bearing housing at a level approximately halfway up the bottom dead centre rolling element. Oil circulation around the bearing is then provided via the bearing rotation agitating the oil sump. It is very important to provide a sufficiently dimensioned oil sump as too small a volume will result in increased frequency of oil change and elevated operating temperatures.

Oil Mist:

An oil/air mist is injected into the bearing via nozzles, normally a total oil loss system, this provides extremely high speed capability at high cost.

For further advice on oil selection and oil lubrication systems please consult SRB Technical Services.

Oil Circulation:

Oil is circulated into the bearing housing assembly from an external oil sump. This allows the oil to be cooled and filtered, additionally an external oil sump normally allows for a higher volume of oil. Whilst being a more optimum solution, specialist housing designs must be provided. There is also a cost and space requirement to this system.

Assembly and Maintenance



Shaft Check

When fitting bearings on both new and existing installations, the shaft need only be raised 1 to 2 millimetres. This should provide sufficient clearance to allow for easy fitting. Prior to the assembly of any bearing components the shaft must be checked for size, roundness and parallelism.

- Check a minimum of three positions along the journal length.
- Check a minimum of three positions around the shaft to establish roundness.
- Shaft tolerances and shaft surface finish are given in the table on page 72.



Fitting the Inner Ring

- Carefully unpack and clean the bearing removing all preservatives.
- Inner race locating clamping rings cannot be removed before the cage has been dismantled.
- Care must be taken that no damage occurs when cage halves are separated.



Please Note:

Spring Clips should always be retained on one cage half.

- Clean the shaft and lightly oil the bore of the inner race.
- Place the two inner race halves in approximately the correct position with the joints at the top and bottom. With the joints in that position it will allow easy access to the clamp ring screws later when they are tightened.
- Ensure that the match marks (black band) in the clamp ring groove on one side of the race coincide.

There should be an equal gap at each joint. If there are no gaps do not proceed and contact the SRB Technical Services Department.



- Fit the inner race locating clamping rings. Ensure that the correct clamp ring is fitted in the corresponding groove. To assist in this the clamping rings are intentionally manufactured to different widths on the more popular sizes. In addition, the match-marking groove found on the inner race is repeated on the corresponding clamping ring.
- Make sure that the thrust faces are not damaged when the rings enter the grooves.
- The joints should be at 90° to the inner race joints and the screws should be tightened in such a way that there are four equal gaps.
- Screws should only be finger tight so that the race can be adjusted axially into its final position.



Pre-Assembly of the Outer Race into the Seating Groove in the Housing

- The housing must be cleaned thoroughly removing all preservatives. If reusing an existing housing it is essential that the outer race seating groove is clean and free of any hardened grease deposits or corrosion.
- Lightly oil the seating groove and the outside diameter of the outer race halves.
- Place the race halves of the expansion or retained type into the seating groove and ensure that:
- The match marking numbers on the edge of each race half coincide.
- The lubrication hole in the outer race is in the upper housing half.
- The outer race joints should protrude equally above the housing joint faces.

If a retained bearing is being fitted:

- Pre-assemble the housing halves and fully tighten the joint socket head cap screws.
- Ensure that the joints are closed.
- Fit the pins and screws provided and tighten up evenly to ensure that the outer race is fixed square against the opposite shoulder of the seating groove.


Larger bearings (both retained and expansion) may require outer race retaining screws.

If these are required, please ensure that the flat washers are not omitted. Once fitted, ensure that the end of the screw does not protrude above the race track surface.

- Separate the housing halves, these are now ready for final assembly.
- Fit the appropriate seals. The seal grooves in the standard housing are suitable for felt and synthetic rubber. If the bearing is inspected or replaced on an existing installation and the housing is re-used, we advise that new seals are fitted.

Pre-Fitting the Lower Housing Half

On existing installations it is often unnecessary to change the support if a bearing, or bearing and housing has to be replaced. In such cases the support base bolts should not be touched to ensure that the replacement bearing and the old or new housing will be in the same position as previously. In new installations the support base should be positioned with the bolts finger tight. This will allow additional freedom of movement when aligning the inner and outer races.

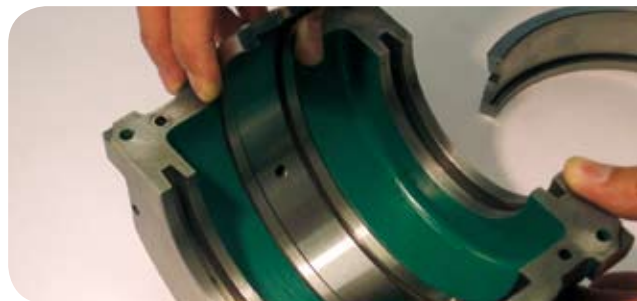

Retained Bearing

- Slide the pre-assembled bottom half into the support base.
- Line up the inner and outer race roller track by adjusting the inner ring sideways into the final position. The final position should be confirmed by passing one half of the cage and roller assembly between the inner and outer races. The cage half should pass freely round the lower half of the bearing without becoming jammed or trapped.
- Remove the bottom housing half and tighten the clamp ring socket head cap screws and fit the cage as explained below.

Group	Maximum Expansion if cage and rollers are assembled central	Maximum Expansion
	1	2
40 mm 1½"	3 mm	7 mm
50 mm 2"	3 mm	8 mm
60 mm 2½"	3.5 mm	10 mm
70 mm 3"	4 mm	11 mm
80 mm 3½"	5 mm	16 mm
100 mm 4"	5.5 mm	17 mm
110 mm 4½"	8 mm	18 mm
120 mm 5"	8.5 mm	18 mm
140 mm 5½"	9 mm	
160 mm 6"	9 mm	

Expansion Bearing

- As in the case of the retained bearing, slide in the pre-assembled bottom housing half.
- Line up the inner ring by adjusting it sideways until it is central with the outer race.
- The clearance between the inner race end faces and inside housing walls should be equal. If cage and rollers are assembled in this position the shaft can expand either side of the centre line by the amount shown in column 1 in the table right.
- When the position of the inner ring is satisfactory, remove the bottom half housing and tighten the clamp ring socket head cap screws and fit the cage as explained below.

A greater degree of expansion allowance can be obtained, but only in one direction. This is achieved by offsetting the inner race with respect to the housing. In this case the total amount of linear movement in service is given in column 2 of the table.

Tightening of the Locating Clamping Ring Screws

- When the inner race is in its final position, tighten all four clamping ring screws equally.
- Use the correct hexagon key and a torque wrench.
- Tap down the locating thrust rings with a nylon mallet to ensure that they are seating down correctly within the grooves.
- Re-tighten and repeat the tapping down until the screws are fully tight.
- Torque values for the various screw sizes are given in the tables at the end of this section. If a screw is lost it must be replaced using a High Tensile Socket Head Cap Screw Grade, 12.9.



Fitting the Cage

- Grease the inner race roller track and cage.
- Place the cage halves around the inner race ensuring that the match mark numbers on the edge of each cage half are the same and coincide at one joint.
- Press the cage halves into the clip ensuring that the roll pins are fully located.
- Check that the cage assembly runs freely on the inner race.
- Fully pack the cage and roller assembly with the correct type of grease.



Final Fitting of the Housing

- Charge the bottom and upper housing halves with the correct amount of grease. Refer to page 73 for correct types and quantities of grease depending on the application and the speed.
- Lightly oil the spherical diameter of both housing and support and slide the bottom housing half into the support base.
- Lower the shaft with the assembled inner races and cages, until the rollers touch the tracks in the bottom half housing. Make sure that when the rollers in the retained bearing enter the outer race groove they do not damage the lips.
- Revolve the shaft by hand, the rollers should move freely between the thrust shoulders of the inner race and the lips of the retained outer race.
- Fit the upper housing half then tighten the housing joint screws. Check that there is no gap at the joints.


Fitting the Support Cap

- Place the support cap over the upper housing half and engage the locating dowels at the joint.
- Using a nylon mallet, gently tap the support cap down to close the gap at the joints.
- Fit the bolts and tighten just enough to hold the support joints closed.
- At this point, and only if it is safe to do so, the shaft should be run at low speed and if possible, with low loading. This will allow the spherical locating surfaces to correctly align. If running the shaft under power is not an option, the shaft should be rotated by hand to achieve this goal.
- Tighten the cap bolts fully using a torque wrench. At this point the support base bolts should also be checked and tightened as required. Torque values for housing and support screws are given in the table at the end of this section.



Light Series

Screw Sizes, Key Sizes & Torque Values

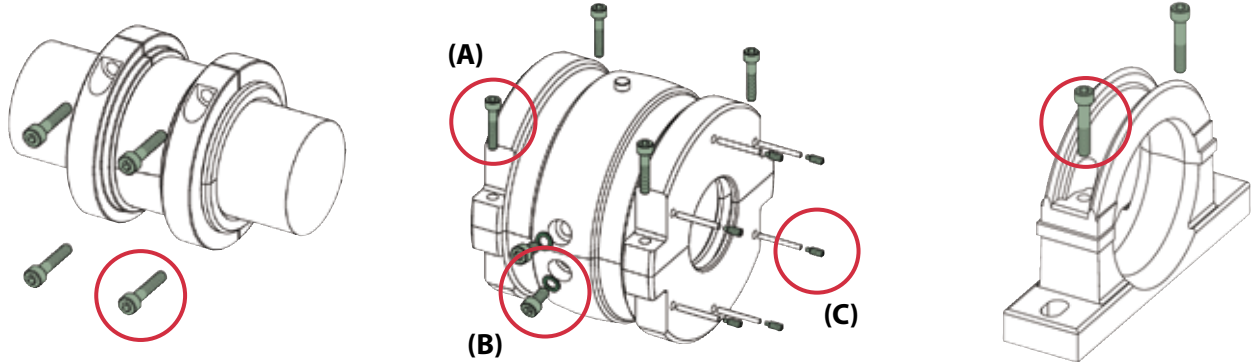


Shaft (d)		Clamping Ring*			Housing						Support					
					Joint (A)		Radial Retainer (B)		Axial Retainers (HR only) (C)							
mm	inch	Screw	Key	Torque Nm (lb.ft)	Screw	Key	Torque Nm (lb.ft)	Screw	Key	Torque Nm (lb.ft)	Screw	Key	Torque Nm (lb.ft)			
35 - 40	1 ³ / ₁₆ - 1 ¹ / ₂	M4	3	5 (3.6)	M4	3	4 (2.6)		M4	2	4 (2.6)	M8	6	27 (20)		
45 - 50	1 ¹ / ₁₆ - 2	M4	3	5 (3.6)	M4	3	4 (2.6)		M4	2	4 (2.6)	M8	6	27 (20)		
60 - 65	2 ³ / ₁₆ - 2 ¹ / ₂	M4	3	5 (3.6)	M4	3	4 (2.6)		M4	2	4 (2.6)	M10	8	54 (40)		
70 - 75	2 ¹ / ₁₆ - 3	M4	3	5 (3.6)	M4	3	4 (2.6)		M4	2	4 (2.6)	M12	10	94 (69)		
80 - 90	3 ³ / ₁₆ - 3 ¹ / ₂	M5	4	9 (7)	M5	4	7 (5)		M4	2	4 (2.6)	M16	14	231 (170)		
100 - 105	3 ¹ / ₁₆ - 4	M6	5	15 (11)	M6	5	11 (8)		M4	2	4 (2.6)	M16	14	231 (170)		
110 - 115	4 ³ / ₁₆ - 4 ¹ / ₂	M6	5	15 (11)	M6	5	11 (8)		M6	3	11 (8)	M20	17	434 (320)		
120 - 130	4 ¹ / ₁₆ - 5	M6	5	15 (11)	M6	5	11 (08)		M6	3	11 (08)	M20	17	434 (320)		
135 - 140	5 ³ / ₁₆ - 5 ¹ / ₂	M8	6	35 (26)	M8	6	27 (20)		M6	3	11 (08)	M20	17	434 (320)		
150 - 155	5 ¹ / ₁₆ - 6	M8	6	35 (26)	M8	6	27 (20)		M6	3	11 (08)	M20	17	434 (320)		
160	6 ¹ / ₁₆ - 6 ¹ / ₂	M8	6	35 (26)	M8	6	27 (20)	M6	3	11 (08)	M16	14	231 (170)			
170 - 180	6 ¹ / ₁₆ - 7	M8	6	35 (26)	M8	6	27 (20)	M6	3	11 (08)	M16	14	231 (170)			
190 - 200	7 ¹ / ₄ - 8	M8	6	35 (26)	M8	6	27 (20)	M10	8	54 (40)	M16	14	231 (170)			
220 - 230	8 ¹ / ₂ - 9	M10	8	72 (53)	M10	8	54 (40)	M10	8	54 (40)	M16	14	231 (170)			
240 - 250	9 ¹ / ₂ - 10	M10	8	72 (53)	M10	8	54 (40)	M10	8	54 (40)	M6	3	11 (08)	M20	17	434 (320)
260 - 280	10 ¹ / ₂ - 11	M10	8	72 (53)	M10	8	54 (40)	M10	8	54 (40)	M10	5	54 (40)	M20	17	434 (320)
300	11 ¹ / ₂ - 12	M10	8	72 (53)	M10	8	54 (40)	M10	8	54 (40)	M10	5	54 (40)	M20	17	434 (320)
320 - 330	12 ¹ / ₂ - 13	M12	10	125 (92)	M12	10	94 (69)	M10	8	54 (40)	M10	5	54 (40)	M20	17	434 (320)
340 - 350	14	M12	10	125 (92)	M12	10	94 (69)	M10	8	54 (40)	M10	5	54 (40)	M20	17	434 (320)
360 - 380	15	M12	10	125 (92)	M12	10	94 (69)	M10	8	54 (40)	M10	5	54 (40)	M20	17	434 (320)
400	16	M12	10	125 (92)	M12	10	94 (69)	M10	8	54 (40)	M10	5	54 (40)	M20	17	434 (320)
420	17	M12	10	125 (92)	M12	10	94 (69)	M12	10	54 (40)	M10	5	54 (40)	M20	17	434 (320)
440 - 460	18	M12	10	125 (92)	M12	10	94 (69)	M12	10	54 (40)	M10	5	54 (40)	M20	17	434 (320)
480	19	M12	10	125 (92)	M12	10	94 (69)	M12	10	54 (40)	M10	5	54 (40)	M20	17	434 (320)
500	20	M16	14	309 (228)	M16	14	231 (170)	M12	10	54 (40)	M10	5	54 (40)	M20	17	434 (320)
530	21	M16	14	309 (228)	M16	14	231 (170)	M12	10	54 (40)	M10	5	54 (40)	M20	17	434 (320)
560	22	M16	14	309 (228)	M16	14	231 (170)	M12	10	54 (40)	M10	5	54 (40)	M20	17	434 (320)
580	23	M16	14	309 (228)	M16	14	231 (170)	M12	10	54 (40)	M10	5	54 (40)	M20	17	434 (320)
600	24	M16	14	309 (228)	M16	14	231 (170)	M12	10	54 (40)	M10	5	54 (40)	M20	17	434 (320)

* May be increased by up to 20% for high axial load applications

Medium Series

Screw Sizes, Key Sizes & Torque Values



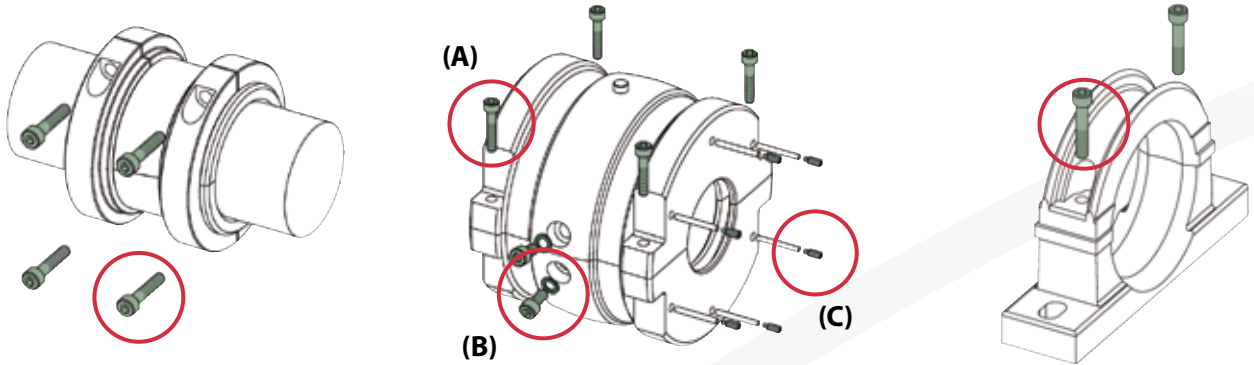


Shaft (d)		Clamping Ring*			Housing									Support		
					Joint (A)			Radial Retainer (B)			Axial Retainers (HR only) (C)					
mm	inch	Screw	Key	Torque Nm (lb.ft)	Screw	Key	Torque Nm (lb.ft)	Screw	Key	Torque Nm (lb.ft)	Screw	Key	Torque Nm (lb.ft)	Screw	Key	Torque Nm (lb.ft)
45 - 50	1 ¹¹ / ₁₆ - 2	M5	4	9 (7)	M5	4	7 (5)				M4	2	4 (2.6)	M10	8	54 (40)
60 - 65	2 ³ / ₁₆ - 2 ¹ / ₂	M5	4	9 (7)	M5	4	7 (5)				M4	2	4 (2.6)	M12	10	94 (69)
70 - 75	2 ¹¹ / ₁₆ - 3	M6	5	15 (11)	M6	5	11 (08)				M4	2	4 (2.6)	M16	14	231 (170)
80 - 90	3 ³ / ₁₆ - 3 ¹ / ₂	M6	5	15 (11)	M6	5	11 (08)				M4	2	4 (2.6)	M16	14	231 (170)
100 - 105	3 ¹¹ / ₁₆ - 4	M6	5	15 (11)	M6	5	11 (8)				M4	2	4 (2.6)	M20	17	434 (320)
110 - 115	4 ³ / ₁₆ - 4 ¹ / ₂	M8	6	35 (26)	M8	6	27 (20)				M6	3	11 (8)	M20	17	434 (320)
120 - 130	4 ¹¹ / ₁₆ - 5	M8	6	35 (26)	M8	6	27 (20)				M6	3	11 (08)	M20	17	434 (320)
135 - 140	5 ³ / ₁₆ - 5 ¹ / ₂	M8	6	35 (26)	M8	6	27 (20)				M6	3	11 (08)	M20	17	434 (320)
150 - 155	5 ¹¹ / ₁₆ - 6	M8	6	35 (26)	M8	6	27 (20)				M6	3	11 (08)	M20	17	434 (320)
160 - 170	6 ³ / ₁₆ - 6 ¹ / ₂	M10	8	72 (53)	M10	8	54 (40)				M6	3	11 (08)	M20	17	434 (320)
180	6 ¹¹ / ₁₆ - 7	M10	8	72 (53)	M10	8	54 (40)	M10	8	54 (40)	M6	3	11 (08)	M20	17	434 (320)
190 - 200	7 ¹ / ₄ - 8	M12	10	125 (92)	M12	10	94 (69)	M10	8	54 (40)	M6	3	11 (08)	M20	17	434 (320)
220 - 230	8 ¹ / ₂ - 9	M12	10	125 (92)	M12	10	94 (69)	M10	8	54 (40)	M6	3	11 (08)	M20	17	434 (320)
240 - 260	9 ¹ / ₂ - 10	M12	10	125 (92)	M12	10	94 (69)	M10	8	54 (40)	M10	5	54 (40)	M20	17	434 (320)
280	10 ¹ / ₂ - 11	M16	14	309 (228)	M16	14	231 (170)	M10	8	54 (40)	M10	5	54 (40)	M20	17	434 (320)
300	11 ¹ / ₂ - 12	M16	14	309 (228)	M16	14	231 (170)	M10	8	54 (40)	M10	5	54 (40)	M20	17	434 (320)
320 - 330	12 ¹ / ₂ - 13	M16	14	309 (228)	M16	14	231 (170)	M10	8	54 (40)	M10	5	54 (40)	M20	17	434 (320)
340 - 360	14	M16	14	309 (228)	M16	14	231 (170)	M12	10	54 (40)	M10	5	54 (40)	M20	17	434 (320)
380	15	M16	14	309 (228)	M16	14	231 (170)	M12	10	54 (40)	M10	5	54 (40)	M20	17	434 (320)
400	16	M16	14	309 (228)	M16	14	231 (170)	M12	10	54 (40)	M10	5	54 (40)	M20	17	434 (320)
420	17	M16	14	309 (228)	M16	14	231 (170)	M12	10	54 (40)	M10	5	54 (40)	M20	17	434 (320)
440 - 460	18	M16	14	309 (228)	M16	14	231 (170)	M12	10	54 (40)	M10	5	54 (40)	M20	17	434 (320)
480	19	M20	17	600 (442)	M20	17	434 (320)	M12	10	54 (40)	M10	5	54 (40)	M24	19	760 (560)
500	20	M20	17	600 (442)	M20	17	434 (320)	M12	10	54 (40)	M10	5	54 (40)	M24	19	760 (560)
530	21	M20	17	600 (442)	M20	17	434 (320)	M12	10	54 (40)	M10	5	54 (40)	M24	19	760 (560)
560	22	M20	17	600 (442)	M20	17	434 (320)	M12	10	54 (40)	M10	5	54 (40)	M24	19	760 (560)
580	23	M20	17	600 (442)	M20	17	434 (320)	M12	10	54 (40)	M10	5	54 (40)	M24	19	760 (560)
600	24	M20	17	600 (442)	M20	17	434 (320)	M12	10	54 (40)	M10	5	54 (40)	M24	19	760 (560)

* May be increased by up to 20% for high axial load applications

Heavy Series

Screw Sizes, Key Sizes & Torque Values

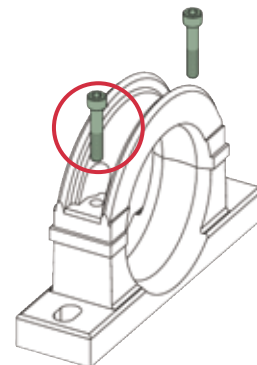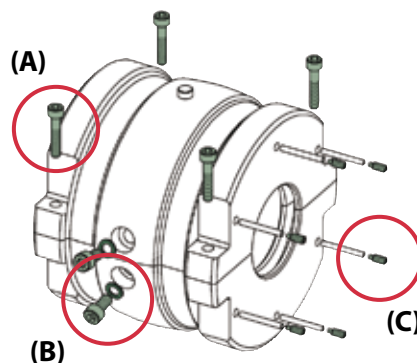

Shaft (d)		Clamping Ring*			Housing												Support		
					Joint (A)			Radial Retainer (B)			Axial Retainers (HR only) (C)								
mm	inch	Screw	Key	Torque Nm (lb.ft)	Screw	Key	Torque Nm (lb.ft)	Screw	Key	Torque Nm (lb.ft)	Screw	Key	Torque Nm (lb.ft)	Screw	Key	Torque Nm (lb.ft)	Screw	Key	Torque Nm (lb.ft)
100 - 105	3 ¹¹ / ₁₆ - 4	M10	8	72 (53)	M10	8	54 (40)	M10	8	54 (40)	M6	3	11 (08)	M16	14	231 (170)			
110 - 120	4 ³ / ₁₆ - 4 ¹ / ₂	M10	8	72 (53)	M10	8	54 (40)	M10	8	54 (40)	M6	3	11 (08)	M16	14	231 (170)			
125 - 130	4 ¹⁵ / ₁₆ - 5	M10	8	72 (53)	M10	8	54 (40)	M10	8	54 (40)	M10	5	54 (40)	M16	14	231 (170)			
135 - 140	5 ³ / ₁₆ - 5 ¹ / ₂	M10	8	72 (53)	M10	8	54 (40)	M10	8	54 (40)	M10	5	54 (40)	M20	17	434 (320)			
150 - 155	5 ¹¹ / ₁₆ - 6	M10	8	72 (53)	M10	8	54 (40)	M10	8	54 (40)	M10	5	54 (40)	M20	17	434 (320)			
160 - 170	6 ² / ₁₆ - 6 ¹¹ / ₁₆	M12	10	125 (92)	M12	10	94 (69)	M12	10	94 (69)	M10	5	54 (40)	M20	17	434 (320)			
180	6 ³ / ₄ - 7	M12	10	125 (92)	M12	10	94 (69)	M12	10	94 (69)	M10	5	54 (40)	M20	17	434 (320)			
190 - 200	7 ¹ / ₄ - 8	M12	10	125 (92)	M12	10	94 (69)	M12	10	94 (69)	M10	5	54 (40)	M20	17	434 (320)			
220 - 230	8 ¹ / ₂ - 9	M16	14	309 (228)	M16	14	231 (170)	M12	10	94 (69)	M10	5	54 (40)	M20	17	434 (320)			
240 - 260	9 ¹ / ₂ - 10	M16	14	309 (228)	M16	14	231 (170)	M12	10	94 (69)	M10	5	54 (40)	M20	17	434 (320)			
280	11	M20	17	600 (442)	M20	17	434 (320)	M12	10	94 (69)	M10	5	54 (40)	M20	17	434 (320)			
300	12	M20	17	600 (442)	M20	17	434 (320)	M12	10	94 (69)	M10	5	54 (40)	M20	17	434 (320)			
320 - 330	13	M20	17	600 (442)	M20	17	434 (320)	M12	10	94 (69)	M10	5	54 (40)	M24	19	760 (560)			
340 - 360	14	M24	19	997 (735)	M20	17	434 (320)	M12	10	94 (69)	M10	5	54 (40)	M24	19	760 (560)			
380 - 400	15 - 16	M24	19	997 (735)	M20	17	434 (320)	M12	10	94 (69)	M10	5	54 (40)	M24	19	760 (560)			
420 - 440	17	M24	19	997 (735)	M20	17	434 (320)	M12	10	94 (69)	M16	14	231 (170)	M24	19	760 (560)			
460	18	M24	19	997 (735)	M20	17	434 (320)	M12	10	94 (69)	M16	14	231 (170)	M24	19	760 (560)			
480	19	M24	19	997 (735)	M20	17	434 (320)	M12	10	94 (69)	M16	14	231 (170)	M24	19	760 (560)			
500	20	M24	19	997 (735)	M20	17	434 (320)	M16	14	231 (170)	M10	5	54 (40)	M24	19	760 (560)			
530	21	M24	19	997 (735)	M20	17	434 (320)	M16	14	231 (170)	M10	5	54 (40)	M24	19	760 (560)			
560	22	M24	19	997 (735)	M20	17	434 (320)	M12	10	94 (69)	M10	5	54 (40)	M24	19	760 (560)			
580	23	M24	19	997 (735)	M20	17	434 (320)	M12	10	94 (69)	M10	5	54 (40)	M24	19	760 (560)			
600	24	M24	19	997 (735)	M20	17	434 (320)	M12	10	94 (69)	M10	5	54 (40)	M24	19	760 (560)			

* May be increased by up to 20% for high axial load applications

Shipping Weights

Light Series

mm	inch	Bearing Kg/lb	Housing Kg/lb	Support Kg/lb	Comp. Unit
35	1 ³ / ₁₆	1.3	2.5	3	6.8
40	1 ¹ / ₂	3	6	7	16
45	1 ¹¹ / ₁₆	1.8	3.5	5	10.3
50	2	4	8	11	23
60	2 ³ / ₁₆	2.3	4.4	5.9	12.6
65	2 ¹ / ₂	5	10	13	28
70	2 ¹¹ / ₁₆	3.3	6.5	9.5	19.3
75	3	7	14	21	42
80	3 ³ / ₁₆	5	9	15	29
90	3 ¹ / ₂	11	20	33	64
100	3 ¹¹ / ₁₆	7	11	16	34
105	4	15	24	35	74
110	4 ³ / ₁₆	10.5	16	24	50.5
115	4 ¹ / ₂	23	35	53	111
120	4 ¹¹ / ₁₆	14	24	41	79
130	5	31	53	90	174
135	5 ³ / ₁₆	17	27	49	93
140	5 ¹ / ₂	37	59	108	204
150	5 ¹¹ / ₁₆	18	31	49	98
155	6	40	68	108	216
160	6 ³ / ₁₆	19	35	65	119
	6 ¹ / ₂	42	77	143	262
170	6 ¹¹ / ₁₆	23	36	73	132
180	7	51	79	161	291
190	7 ¹ / ₄	26	45	92	163
200	8	57	99	202	358
220	8 ¹ / ₂	33	48	117	198
230	9	73	106	257	436
240	9 ¹ / ₂	42	60	147	249
250	10	92	132	323	547
260	10 ¹ / ₂	53	73	171	297
280	11	117	161	376	654
300	11 ¹ / ₂	60	89	199	348
305	12	132	196	438	766
320	12 ¹ / ₂	72	109	214	395
330	13	158	240	471	869
340	14	79	121	241	441
350		174	266	530	970
360	15	90	130	294	514
380		198	286	647	1131
400	16	96	145	315	556
		211	319	693	1223
420	17	105	155	323	583
		231	341	711	1283
440	18	119	156	377	652
460		262	343	829	1434
480	19	123	167	467	757
		271	367	1027	1665
500	20	139	198	449	786
		306	436	988	1730
530	21	180	220	502	902
		396	484	1104	1984
560	22	185	258	578	1021
		407	568	1272	2247
580	23	190	280	690	1160
		418	616	1518	2552
600	24	240	296	730	1266
		528	651	1606	2785

Medium Series

mm	inch	Bearing Kg/lb	Housing Kg/lb	Support Kg/lb	Comp. Unit
45	1 ¹¹ / ₁₆	2.5	5	5.9	13.4
50	2	6	11	13	30
60	2 ³ / ₁₆	3.7	8	9.5	21.2
65	2 ¹ / ₂	8	18	21	47
70	2 ¹¹ / ₁₆	5.6	10	15	30.6
75	3	12	22	33	67
80	3 ³ / ₁₆	7	12	16	35
90	3 ¹ / ₂	15	26	35	76
100	3 ¹¹ / ₁₆	11	13	24	48
105	4	24	29	53	106
110	4 ³ / ₁₆	15.5	20	41	76.5
115	4 ¹ / ₂	34	44	90	168
120	4 ¹¹ / ₁₆	21	28	49	98
130	5	46	62	108	216
135	5 ³ / ₁₆	25	36	72	133
140	5 ¹ / ₂	55	79	158	292
150	5 ¹¹ / ₁₆	31	42	80	153
155	6	68	92	176	336
160	6 ³ / ₁₆	40	58	118	216
170	6 ¹ / ₂	88	128	260	476
180	6 ¹¹ / ₁₆	47	68	138	253
	7	103	150	304	557
190	7 ¹ / ₄	59	86	192	337
200	8	130	189	422	741
220	8 ¹ / ₂	69	101	229	399
230	9	152	222	504	878
240	9 ¹ / ₂	79	108	277	464
260	10	174	238	609	1021
270	10 ¹ / ₂	87	134	320	541
280	11	191	295	704	1190
300	11 ¹ / ₂	125	132	372	629
305	12	275	290	818	1383
320	12 ¹ / ₂	150	176	385	711
330	13	330	387	847	1564
340	14	184	190	477	851
360		405	418	1049	1872
380	15	187	213	490	890
		411	469	1078	1958
400	16	210	258	540	1008
		462	568	1188	2218
420	17	245	269	586	1100
		539	592	1289	2420
440	18	255	270	623	1148
460		561	594	1371	2526
480	19	268	277	690	1235
		590	609	1518	2717
500	20	276	328	745	1349
		607	722	1639	2968
530	21	314	357	899	1570
		691	785	1978	3454
560	22	341	385	960	1686
		750	847	2112	3709
580	23	375	405	1001	1781
		825	891	2202	3918
600	24	390	460	1056	1906
		858	1012	2323	4193

Heavy Series

mm	inch	Bearing Kg/lb	Housing Kg/lb	Support Kg/lb	Comp. Unit
100	3 ¹¹ / ₁₆	35	40	121	196
105	4	77	88	266	431
110	4 ³ / ₁₆	41	45	141	227
120	4 ¹ / ₂	90	99	310	499
125	4 ¹⁵ / ₁₆	42	46	156	244
130	5	92	101	343	536
135	5 ³ / ₁₆	50	51	197	298
140	5 ¹ / ₂	110	112	433	655
150	5 ¹¹ / ₁₆	59	75	261	395
155	6	130	165	574	869
160	6 ³ / ₁₆	74	87	291	452
170	6 ¹ / ₂	163	191	640	994
175	6 ³ / ₄	83	91	338	512
180	7	183	200	744	1127
190	7 ¹ / ₄	105	120	454	679
200	8	231	264	999	1494
220	8 ¹ / ₂	151	164	408	949
230	9	332	361	1395	2088
240	9 ¹ / ₂	153	174	540	1064
260	10	337	383	1621	2341
280	11	203	201	459	863
		447	442	1010	1899
300	12	242	249	1019	1510
		532	548	2242	3322
320	13	327	300	1116	1743
		719	660	2455	3834
340	14	375	361	1620	2356
360		825	794	3564	5183
380	15	436	433	1538	2407
400	16	959	953	3384	5296
420	17	400	443	1014	1857
440		880	975	2231	4086
460	18	636	274	1513	2423
		1399	603	3329	5331
500	20	700	880	1863	3443
530	21	1540	1936	4099	7575
560	22	675	694	1847	3216
		1485	1527	4063	7075
580	23	700	770	1794	3264
600	24	1540	1694	3947	7181

Capabilities

Revolvo supply bearings and precision related components to niche markets across a wide range of industries worldwide. Revolvo cellular manufacturing facility provides flexibility for the production of both standard catalogue, specialised and entirely custom designed bearings. These bearings can be manufactured in both inch and metric sizes ranging from 15mm bore to 1500mm outside diameter.

- Cylindrical Roller Bearings
- Deep Groove Ball Bearings
- Angular Contact Bearings
- Thrust Bearings
- Four Point Contact Bearings
- Taper Roller Bearings
- Electrically Insulated Bearings



Revolvo has developed a detailed understanding of the bearing requirements of a diverse range of industries and applications, including; Railways, Marine, Machine Tools & Production, Machinery, Oil & Petrochemicals, Power Generation, Iron & Steel, Mining & Quarrying and Cement. To meet specific industry requirements, Revolvo manufactures from SAE 52100 bearing grade material and in a wide variety of materials, including;

Rings & Rolling Elements

- Carbon Chrome SAE 52100
- Tool Steel SAE M50
- Stainless Steel SAE 440C
- Case Hardening Steels

Cage Materials

- Brass
- Fibre
- Steel
- Aluminium
- Peek
- Silicon Bronze



Producing products that push the boundaries of performance is only the beginning. Revolvo recognise that users and specifiers of specialised and custom designed bearings demand logistical, technical and after sales support. Continuous improvement in these services has enabled Revolvo to win customers. Immediate response and reaction to industry's requirements, enables Revolvo to assist customers from concept, through consultation, commissioning, training, supply and on site support.

- Cellular Manufacturing
- Dedicated CNC Plant
- Application Support Engineers
- Reverse Engineering
- Refurbishment
- Reduced Lead Times
- Customer Approvals
- Bespoke Designs
- Local Support
- Quality Management System



Literature Offerings

Also available from Revolve



Revolve Ingenuity Brochure



Revolve SRB Innovations Brochure





Leading Specialist
Bearing Manufacturer





Full Range of Split
Cylindrical Roller Bearings

Revolvo Ltd. Unit 4, Yorks Park, Blowers Green Road, Dudley, West Midlands DY2 8UL

Tel: +44 (0) 1384 245370 • Fax: +44 (0) 1384 245371 • (Local Rate) Tel: +44 (0) 845 388 0061 • Fax: +44 (0) 845 388 0062

e-mail: sales@revolvo.com • web: www.revolvo.com

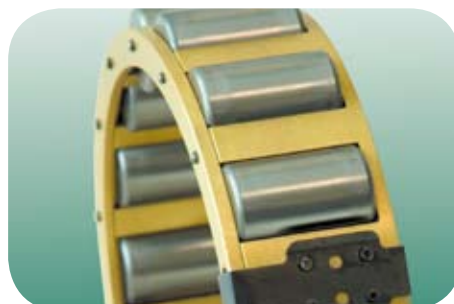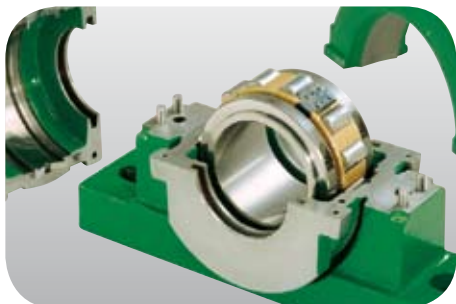

The SRB product range and all support services are available through a selected worldwide network of Authorised Distributors.

Selected as the best in their area, SRB Authorised Distributors are technically competent to support all our customers in application engineering, supply, installation and life maintenance of split roller bearings. They have the full support and backing of SRB including a complete design and manufacturing service for special and bespoke applications.

Authorised Distributors Stamp



Making the world go round



Revolvo Ltd. Unit 4, Yorks Park, Blowers Green Road, Dudley, West Midlands DY2 8UL

Tel: +44 (0) 1384 245370 • Fax: +44 (0) 1384 245371 • (Local Rate) Tel: +44 (0) 845 388 0061 • Fax: +44 (0) 845 388 0062

e-mail: sales@revolvo.com • web: www.revolvo.com